
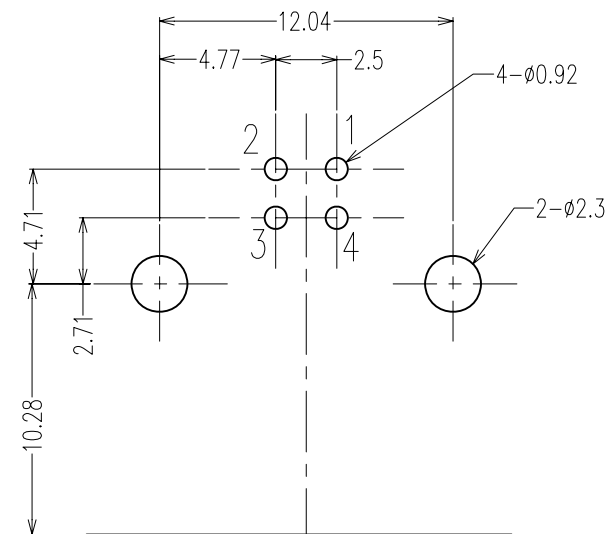
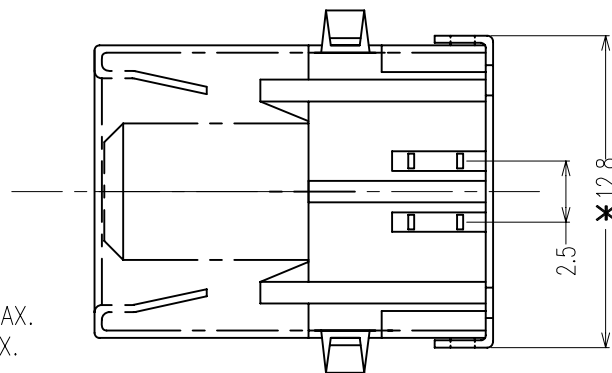
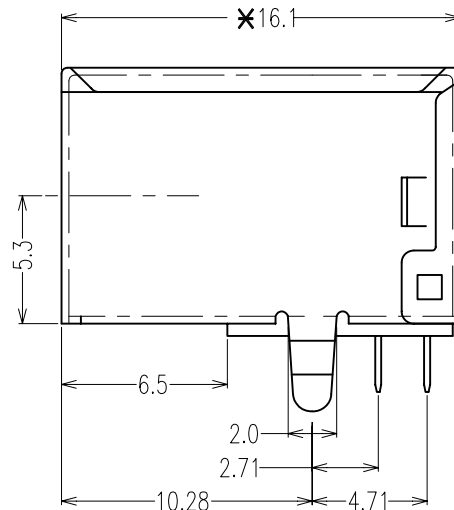


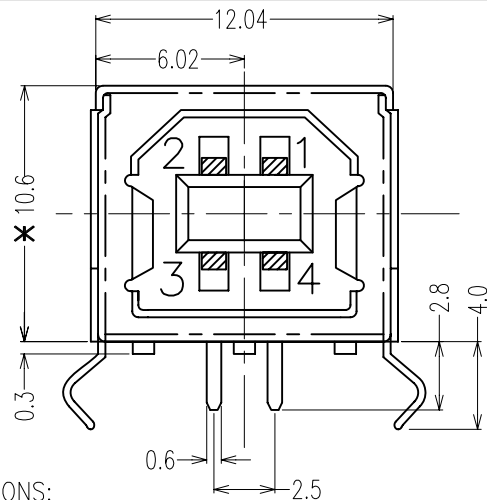

PCB EDGE

PCB LAYOUT
(COMPONENT SIDE)

SPECIFICATIONS:

MATERIAL:-

HOUSING: P.B.T G.F, WHITE, QTY:1

CONTACTS: PHOSPHOR BRONZE, T=0.25, QTY:4

SHELL: BRASS, T=0.3, QTY:1

FINISH:-

CONTACTS: SELECTIVE GOLD OVER 100% TIN

Ni UNDERPLATE

SHELL: Ni PLATED

ELECTRICAL:-

CURRENT RATING: 1.5A

WORKING VOLTAGE: 250V AC

DIELECTRIC STRENGTH: 750V AC FOR ONE MINUTE

CONTACT RESISTANCE: BEFORE LIFE TEST: 30 mΩ MAX.

AFTER LIFE TEST: 50 mΩ MAX.

INSULATION RESISTANCE: 1000 MΩ MIN.

MECHANICAL:-

DURABILITY: 1500 CYCLES

INSERTION FORCE: 35N MAX.

WITHDRAWAL FORCE: 10N MIN.

ENVIRONMENTAL:-

OPERATING TEMPERATURE: -25°C TO 70°C

SOLDERABILITY: 245°C ±5°C

NOTES: ALL DIMENSIONS AND NOTES
MARKED * ARE CRITICAL AND
MUST BE CHECKED IN ACCORDANCE
WITH QUALITY DOC. Q1-02A

Allan	2	26.12.06	A009
Allan	1	01.08.06	-
NAME	ISS.	DATE	C/NOTE

APPROVED:

CHECKED:

DRAWN: Allan

CUSTOMER REF.:

ASSEMBLY DRG:

HARWIN

HARWIN USA
TEL: 603 893 5376
FAX: 603 893 5396
mis@harwin.com

HARWIN Europe (UK)
TEL: 023 9231 4545
FAX: 023 9231 4590
mis@harwin.co.uk

HARWIN Asia
TEL: +65 6 779 4909
FAX: +65 6 779 3868
mis@harwin.com.sg

THIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT
THEIR WRITTEN PERMISSION.

TOLERANCES

X.X = ±0.30mm
X.XX = ±0.20mm

ANGLES = ±3°
UNLESS STATED

MATERIAL:

SEE NOTES

FINISH: SEE NOTES

S/AREA: mm²

TITLE:

USB B TYPE

DRAWING NUMBER:

M701-320442

SHT
1
OF
1