


Specification Sheet

Part Number: 553-50006

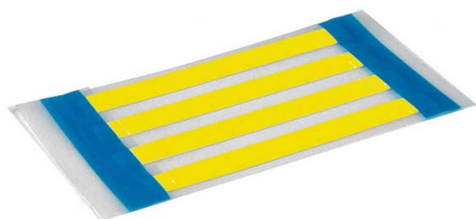

ShrinkTrak Labels, 1-Sided, Unslit, .125" (3.17mm), PO-X, Yellow, 1000/box

Article Number	553-50006
-----------------------	-----------

Type	HST3-1YE
-------------	----------

Color	Yellow (YE)
--------------	-------------

Features & Benefits

Versatile • Flexible, flame retardant, heat shrinkable polyolefin tubing meets all military specification. • 3:1 shrink ratio enables a wide range of wire sizes to be covered. • Standard colors - yellow, white and black. • Larger pack options result in less box changes. High Performance Design • Center slit and multiple slit versions reduce or eliminate hand cutting. • Nonslip printable liner allows additional marker data to be printed on the reverse side for records and placement instructions. • Use HellermannTyton's Durattach ribbon system for the highest print performance on the market. Reduce Printer Jams • Custom box opening allows markers to dispense directly into HellermannTyton thermal transfer printers. • Dispense markers faster and easier with waxed core dispenser.

Quantity Per	box
Product Description	HellermannTyton's ShrinkTrak™ heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.
Short Description	ShrinkTrak Labels, 1-Sided, Unslit, .125" (3.17mm), PO-X, Yellow, 1000/box
Global Part Name	HST3-1YE-PO-X-YE
Variant	Thin-Wall
Width W (Imperial)	1.9
Width W (Metric)	48.26
Thickness T (Imperial)	.003
Thickness T (Metric)	.0762
Height H (Imperial)	0.235
Height H (Metric)	5.69
Width of Liner (Metric)	76.2
Width of Liner (imperial)	3.0

Outside Diameter OD(Imperial)	0.125
Outside Diameter OD(metric)	3.2
Outside Diameter Max(Imperial)	0.125
Outside Diameter Max (metric)	3.2
Wall Thickness WT (Imperial)	0.031
Wall Thickness WT (Metric)	0.79
Material	Polyolefin, cross-linked (PO-X)
Material Shortcut	PO-X
US MIL SPEC	SAE-AMS-DTL-23053/5 Class 1 and 3 SAE-AS81531 MIL-STD-202G Method 215K
Flammability	UL 224 VW-1
Halogen free	No
Operating Temperature (Metric)	-67°F to +275°F (-55°C to +135°C)
Reach Complaint(Article 33)	Yes
ROHS Complaint	Yes

Certification/Specification WEB	UL 224 125 °C 600V VW-1
--	-------------------------

Package Quantity(Imperial)	1000
-----------------------------------	------

Package Quantity (Metric)	1000
----------------------------------	------

Content Unit(BMEcat)	pack
-----------------------------	------

Labels per Column	1
--------------------------	---

Labels per Row	1
-----------------------	---

Weight (Metric)	1.176
------------------------	-------

Weight (Imperial)	2.57
--------------------------	------