


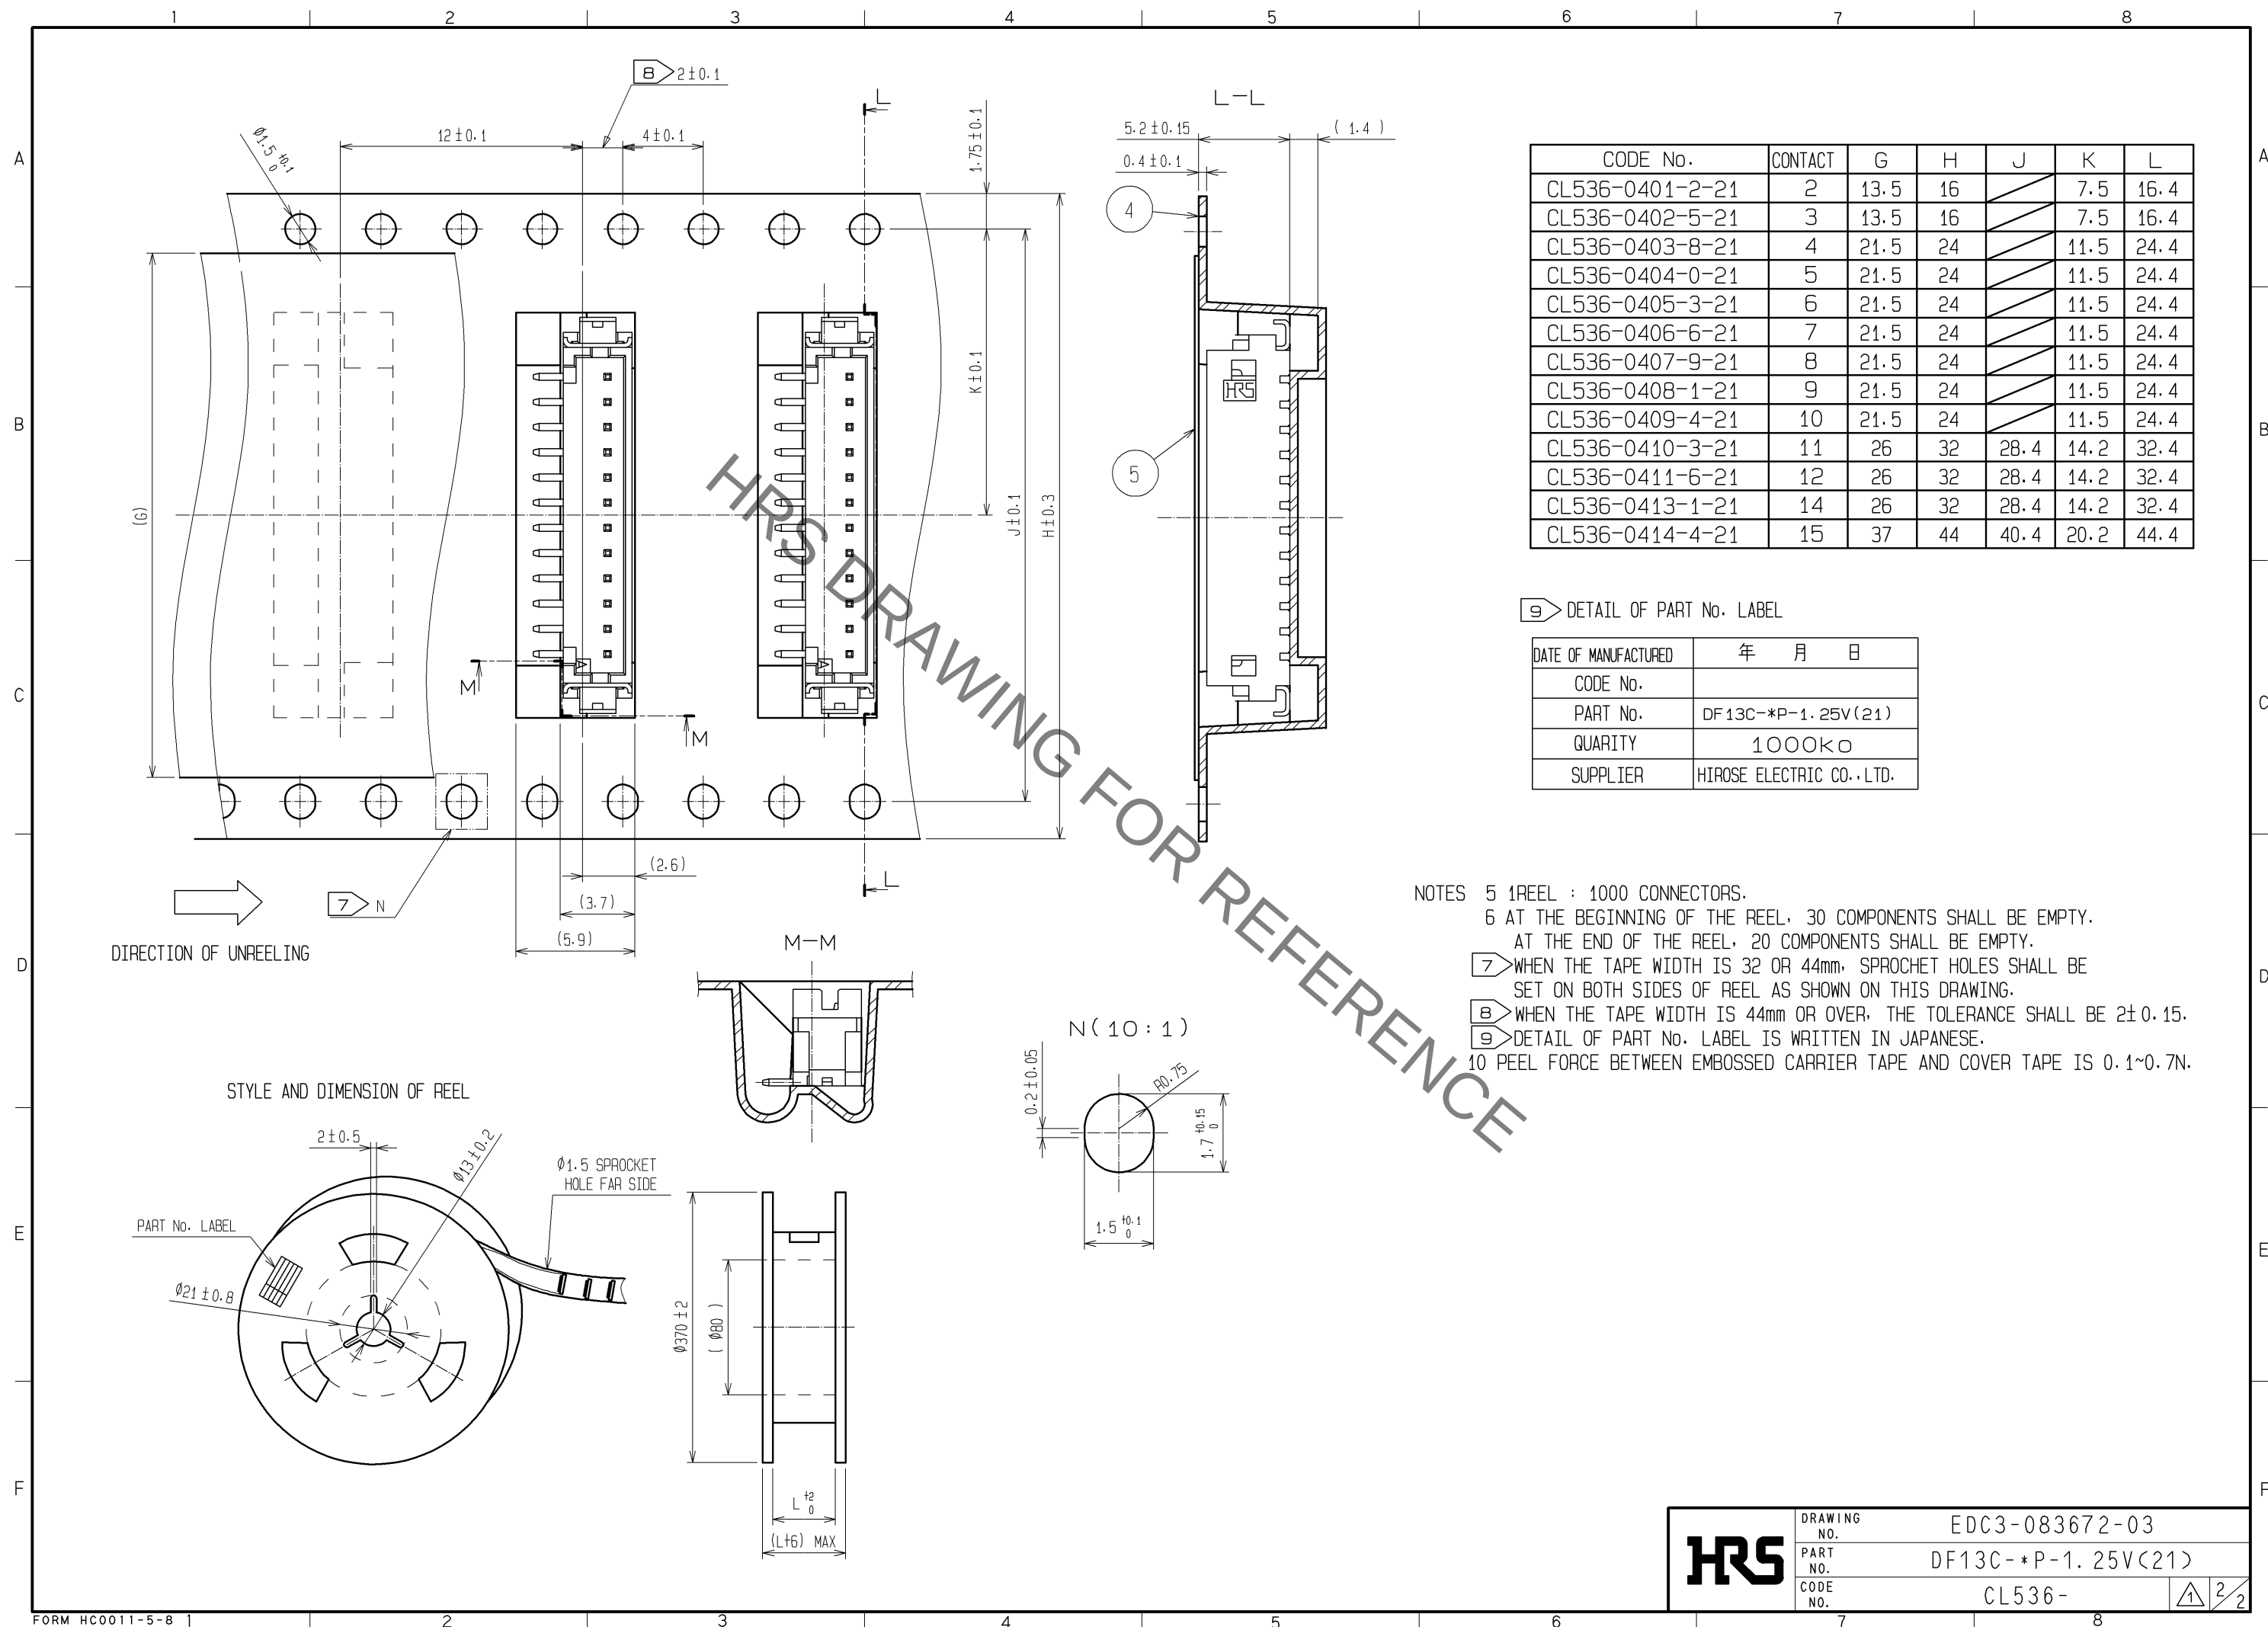

CODE No.	CONTACT	G	H	J	K	L
CL536-0401-2-21	2	13.5	16		7.5	16.4
CL536-0402-5-21	3	13.5	16		7.5	16.4
CL536-0403-8-21	4	21.5	24		11.5	24.4
CL536-0404-0-21	5	21.5	24		11.5	24.4
CL536-0405-3-21	6	21.5	24		11.5	24.4
CL536-0406-6-21	7	21.5	24		11.5	24.4
CL536-0407-9-21	8	21.5	24		11.5	24.4
CL536-0408-1-21	9	21.5	24		11.5	24.4
CL536-0409-4-21	10	21.5	24		11.5	24.4
CL536-0410-3-21	11	26	32	28.4	14.2	32.4
CL536-0411-6-21	12	26	32	28.4	14.2	32.4
CL536-0413-1-21	14	26	32	28.4	14.2	32.4
CL536-0414-4-21	15	37	44	40.4	20.2	44.4

9 DETAIL OF PART No. LABEL

DATE OF MANUFACTURED	年 月 日
CODE No.	
PART No.	DF13C*P-1.25V(21)
QUANTITY	1000K0
SUPPLIER	HIROSE ELECTRIC CO.,LTD.

NOTES 5 1 REEL : 1000 CONNECTORS.
6 AT THE BEGINNING OF THE REEL, 30 COMPONENTS SHALL BE EMPTY.
AT THE END OF THE REEL, 20 COMPONENTS SHALL BE EMPTY.
7 WHEN THE TAPE WIDTH IS 32 OR 44mm, SPROCKET HOLES SHALL BE
SET ON BOTH SIDES OF REEL AS SHOWN ON THIS DRAWING.
8 WHEN THE TAPE WIDTH IS 44mm OR OVER, THE TOLERANCE SHALL BE 2 ± 0.15 .
9 DETAIL OF PART No. LABEL IS WRITTEN IN JAPANESE.
10 PEEL FORCE BETWEEN EMBOSSED CARRIER TAPE AND COVER TAPE IS 0.1~0.7N.

HRS	DRAWING NO. EDC3-083672-03	
	PART NO. DF13C-*P-1.25V<21>	
	CODE NO. CL536-	 2/2