
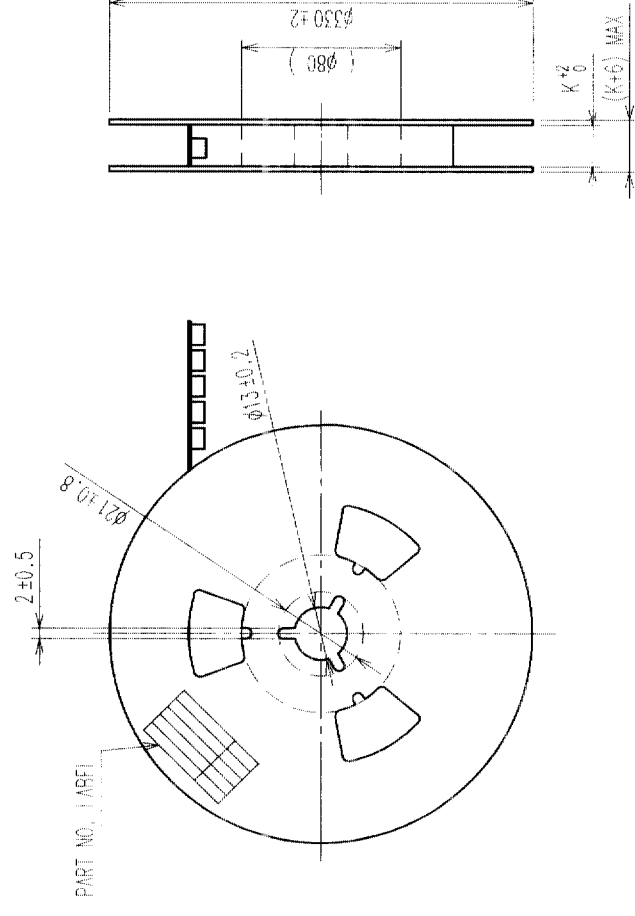


$\frac{1}{2}$

COUNT		DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT		DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△							△				
△							△				
△							△				

PART NO.	CONTACTS	F	G	H	J	K
DF14A- 2P-1.25H(56)	2	7.5	-	16	7.85	16.4
DF14A- 3P-1.25H(56)	3	7.5	-	16	9.1	16.4
DF14A- 4P-1.25H(56)	4	11.5	-	24	10.35	24.4
DF14A- 5P-1.25H(56)	5	11.5	-	24	11.6	24.4
DF14A- 6P-1.25H(56)	6	11.5	-	24	12.85	24.4
DF14A- 7P-1.25H(56)	7	11.5	-	24	14.1	24.4
DF14A- 8P-1.25H(56)	8	11.5	-	24	15.35	24.4
DF14A- 9P-1.25H(56)	9	11.5	-	24	16.6	24.4
DF14A- 10P-1.25H(56)	10	11.5	-	24	17.85	24.4
DF14A- 15P-1.25H(56)	15	20.2	40.4	44	24.1	44.4
DF14A- 20P-1.25H(56)	20	20.2	40.4	44	30.35	44.4
DF14A- 25P-1.25H(56)	25	26.2	52.4	56	36.6	56.4
DF14A- 30P-1.25H(56)	30	26.2	52.4	56	42.85	56.4

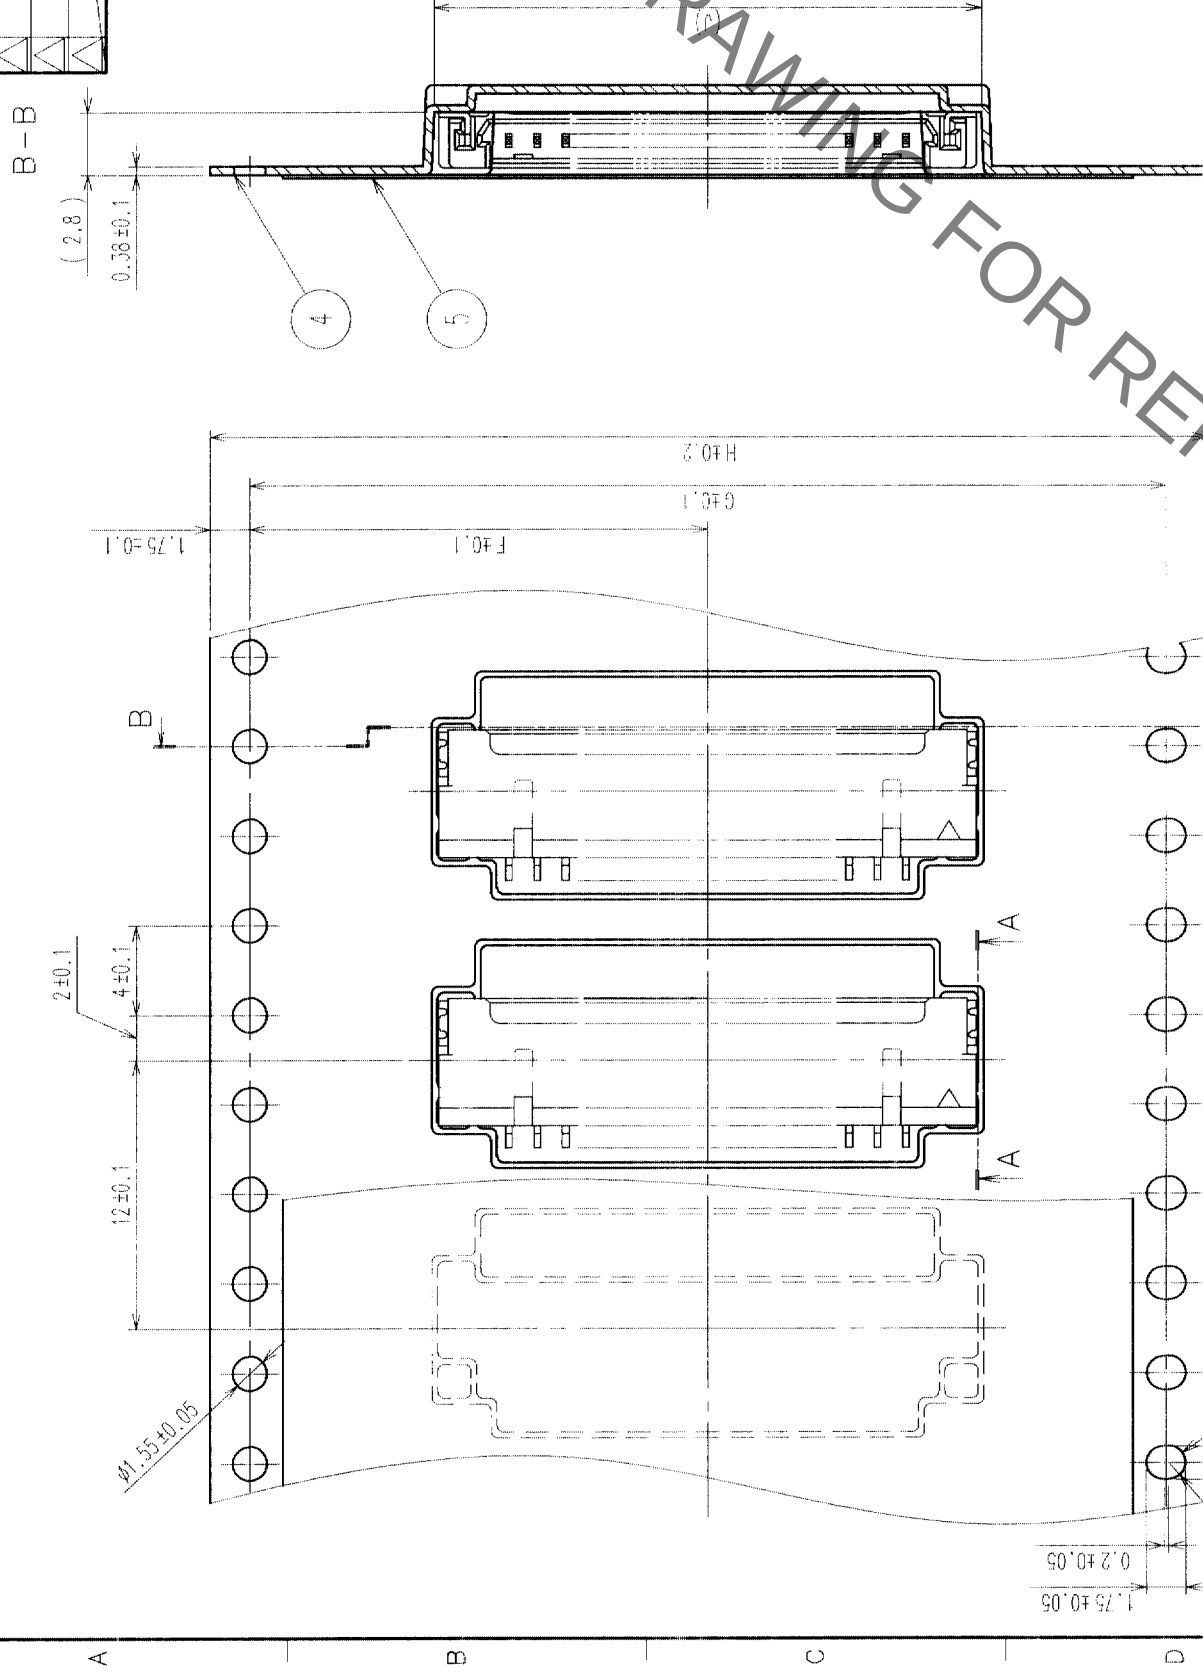

生産月日	年 月 日
CLコード	538-*****-56
品名	DF14A-*P-1.25H(56)
納入数量	1000個
納入者	ヒロセ電機株式会社

NOTE 4 1 REEL : 1000 CONNECTORS
5 AT THE BEGINNING OF THE REEL , 30 COMPONENTS SHALL BE EMPTY .
6 AT THE END OF THE REEL , 20 COMPONENTS SHALL BE EMPTY .
WHEN THE TAPE WIDTH IS 44 TO 56mm , SPROCKET HOLES SHALL
BE SET ON BOTH SIDES OF REEL AS SHOWN ON THIS DRAWING .

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
CODE NO. (OLD)		CL		DRAWN	DESIGNED	CHECKED	APPROVED
				For instruction I. Senp Baya		T. Miyazaki	T. Miyazaki
				03.3.5	03.3.7	03.03.25	03.03.25
DRAWING NO.		PART NO.		DF14A-P-1.25H(56)			
SCALE		EDC3-160309-19					
UNITS		HIROSE ELECTRIC CO., LTD		CODE NO.		CL538-	
mm		HRS				2	