



Jun.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

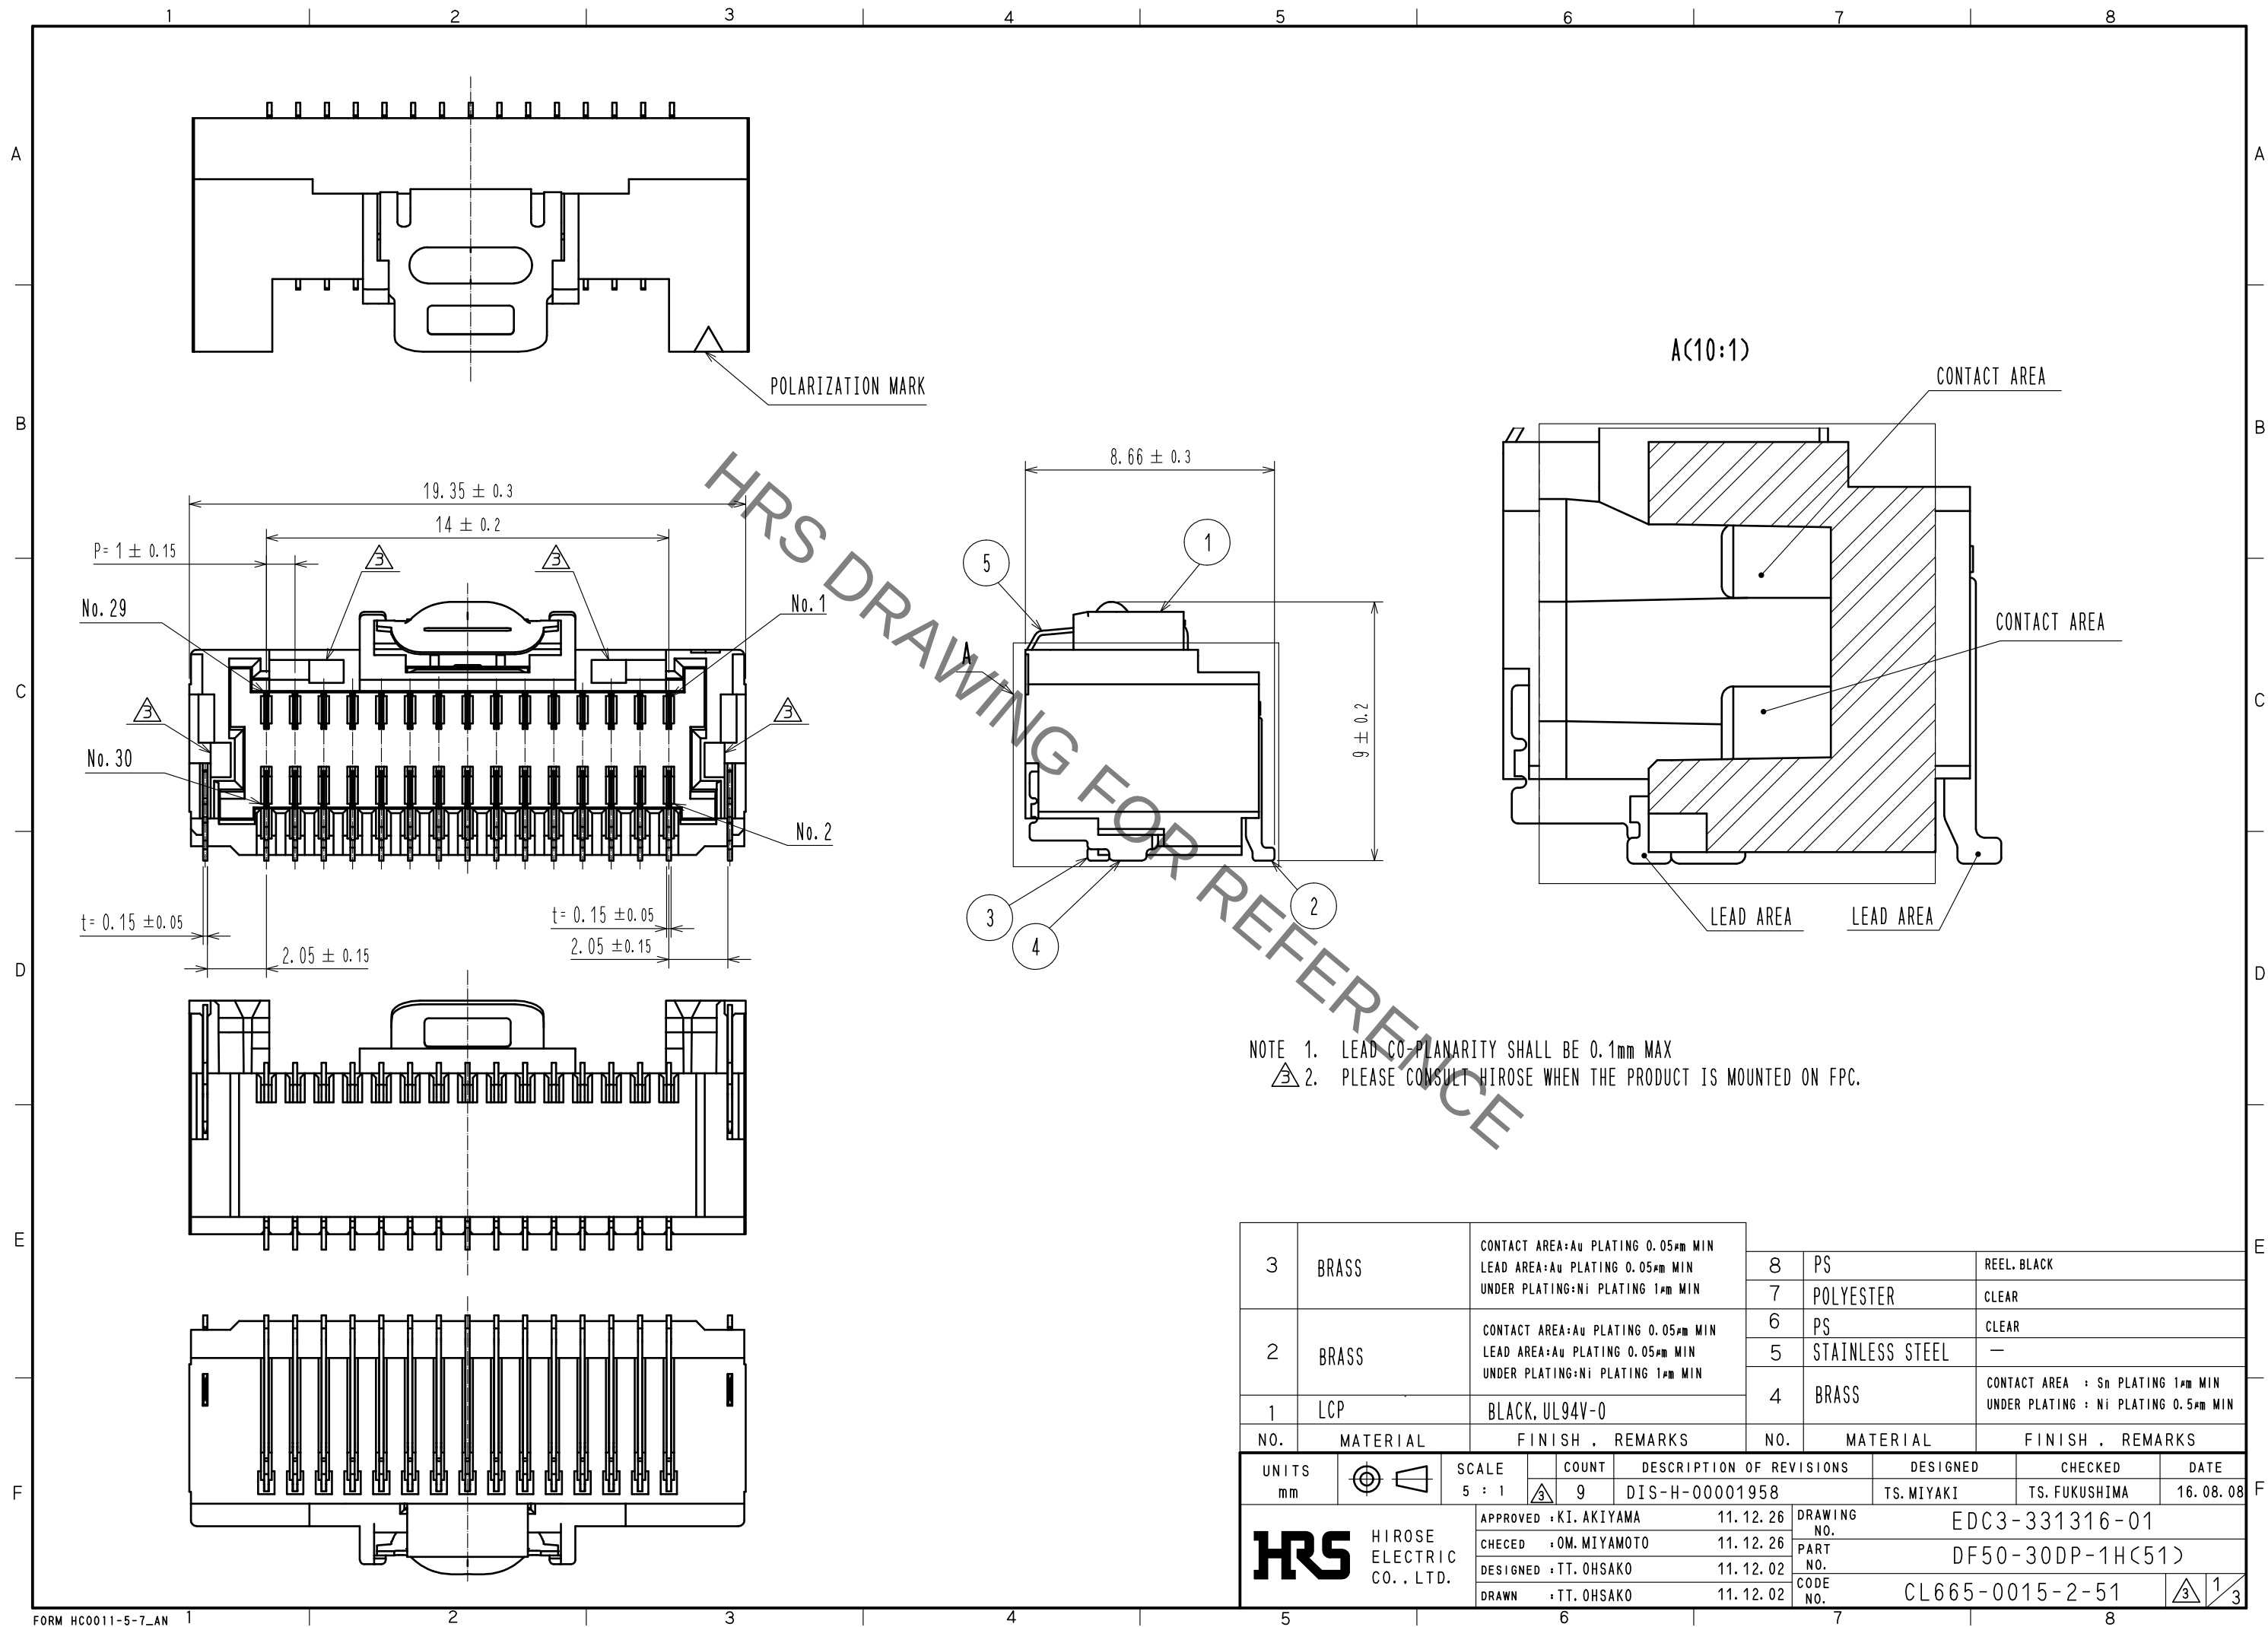


Jun.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

RECOMMENDED PCB LAYOUT (MOUNTING SURFACE SIDE) (FREE)


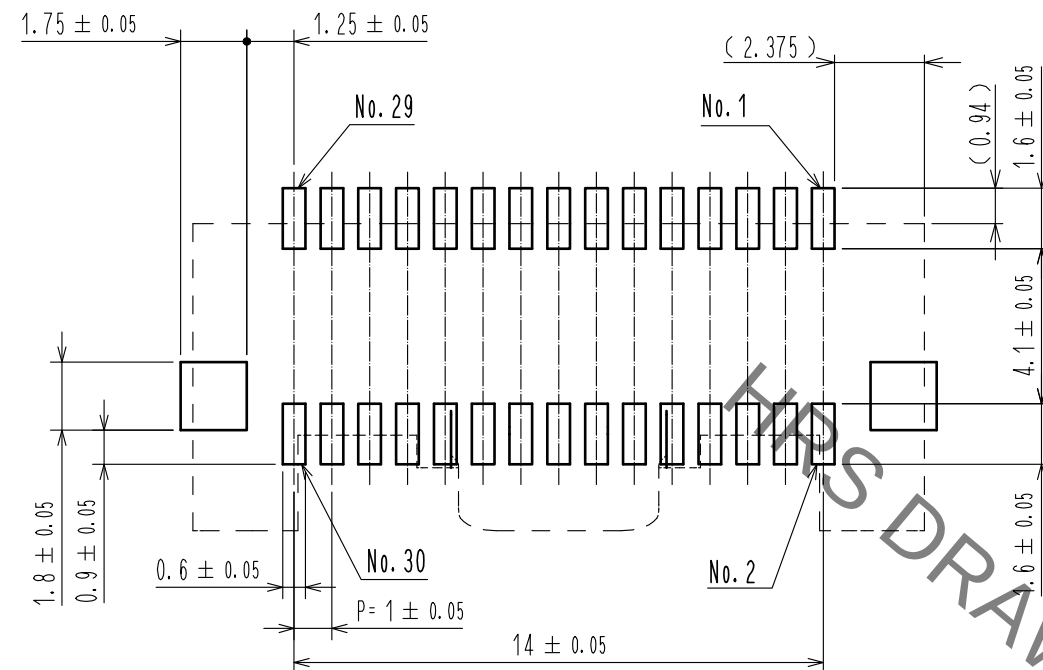


RECOMMENDED METAL MASK (FREE)


THICKNESS : 0.1mm
OPEN AREA RATIO:100%

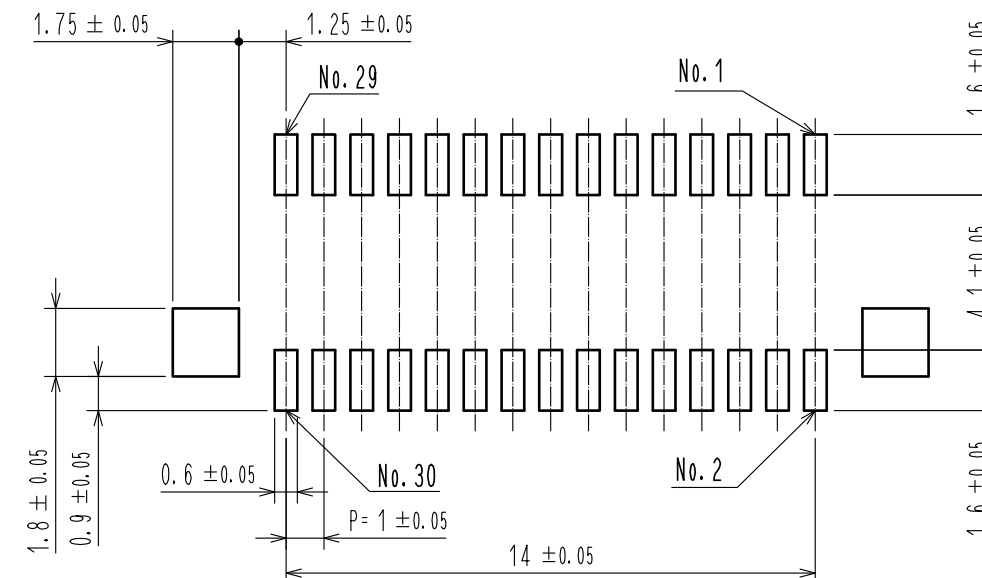

MATING FIGURE (5 : 1)

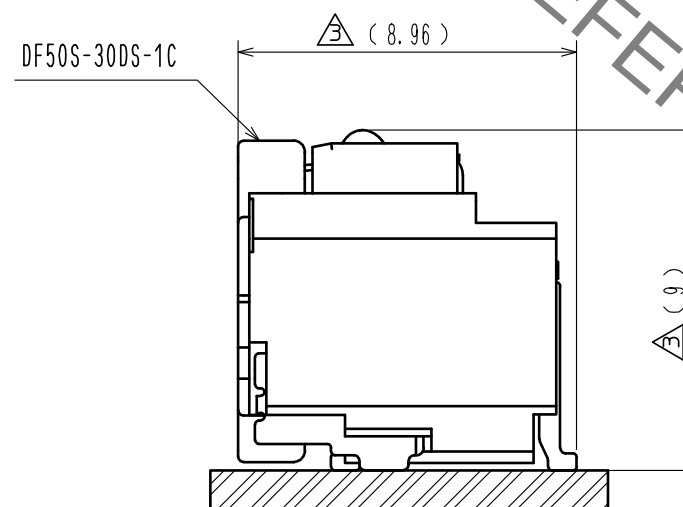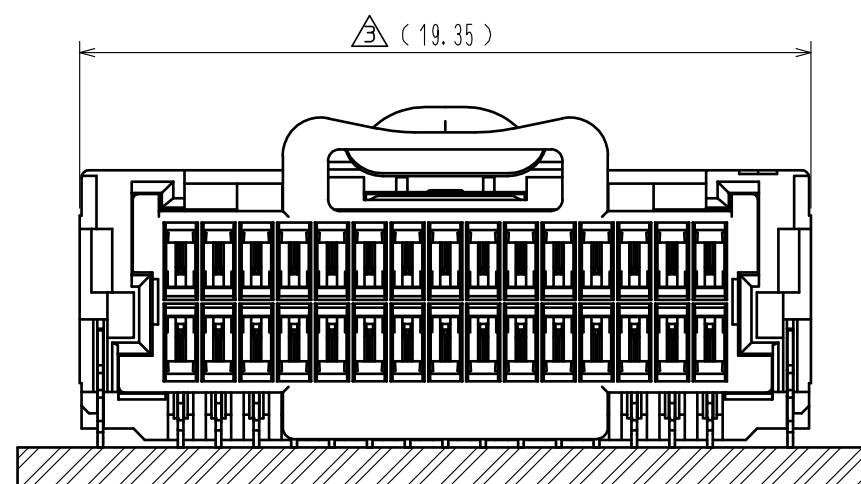

REFLOW TEMPERATURE PROFILE USING LEAD-FREE SOLDER PASTE (REFERENCE)

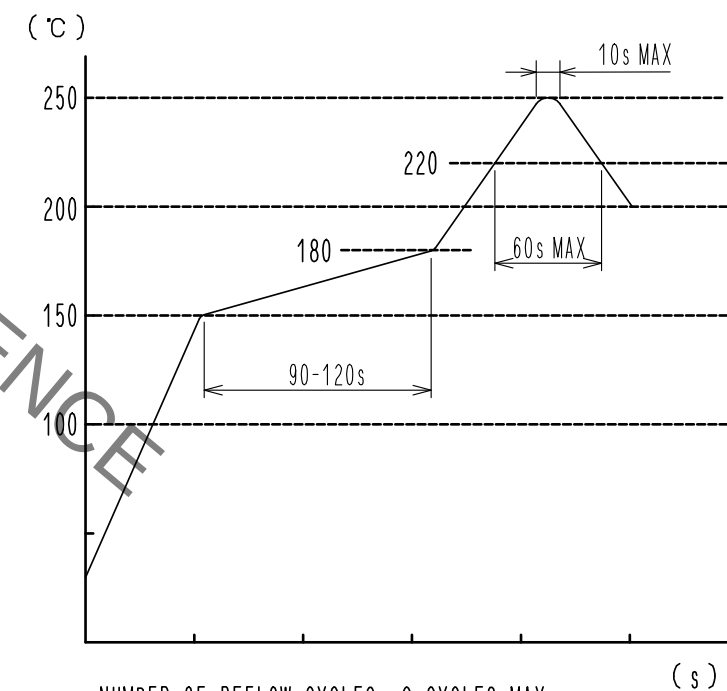

NUMBER OF REFLOW CYCLES: 2 CYCLES MAX.
THE TEMPERATURE OF THIS PROFILE IS MEASURED ON THE LEAD TERMINAL.

WE RECOMMEND PERFORMING AN EVALUATION UNDER THE MOUNTING
CONDITIONS YOU WILL BE USING BECAUSE IT COULD BE AFFECTED
BY ANY CONDITION:TYPE OF SOLDER PASTE, SIZE OF PCB, MOUNTING
MATERIAL etc..

HRS

DRAWING NO.	EDC3-331316-01
PART NO.	DF50-30DP-1H(51)
CODE NO.	CL665-0015-2-51

3/2/3

