




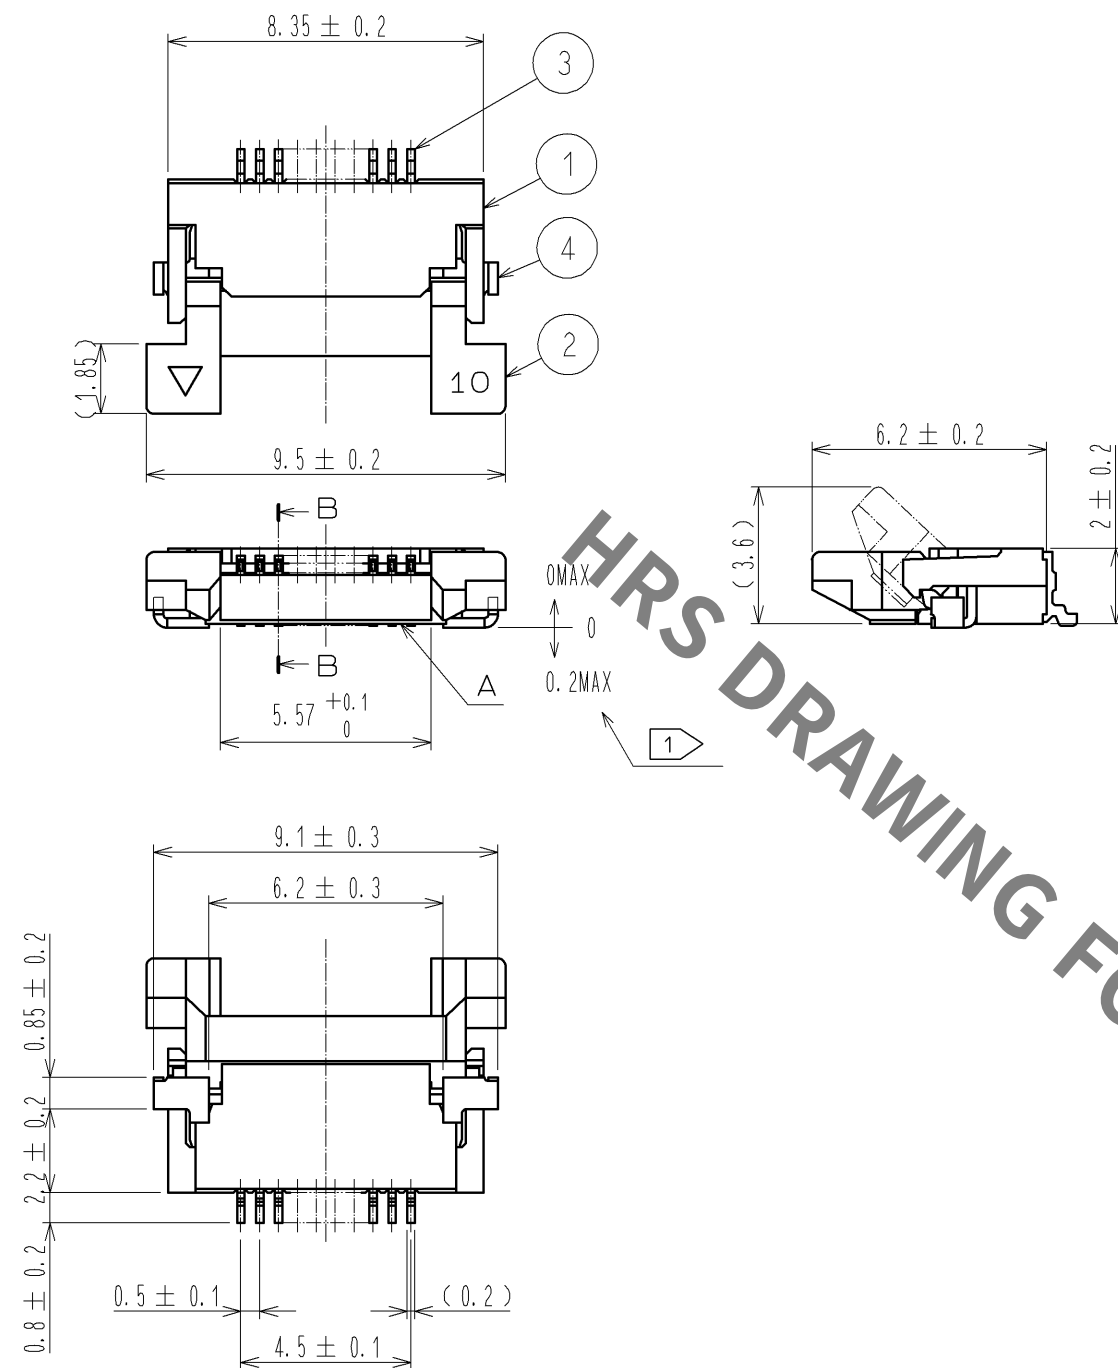


B-B (10 : 1)

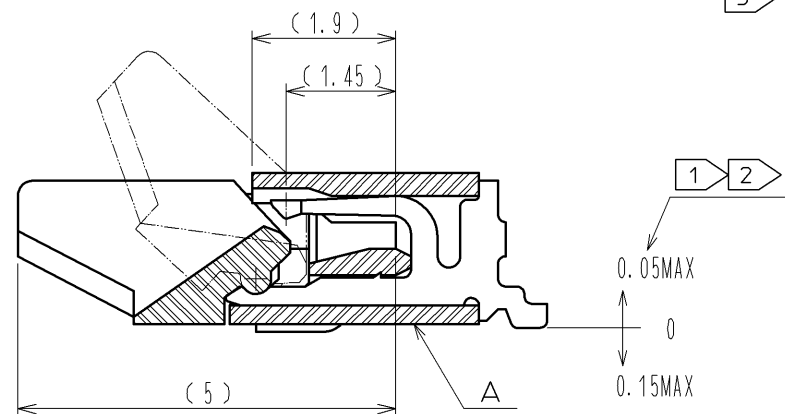

- NOTE
- 1 REFERENCE IS A.
  - 2 LEAD CO-PLANARITY SHALL BE  $0.1 \text{ MAX}$ .
  - 3 THICKNESS OF SUPPORTING TAPE SHALL BE  $0.188(7.5 \text{ mil}) \text{ MIN}$ .

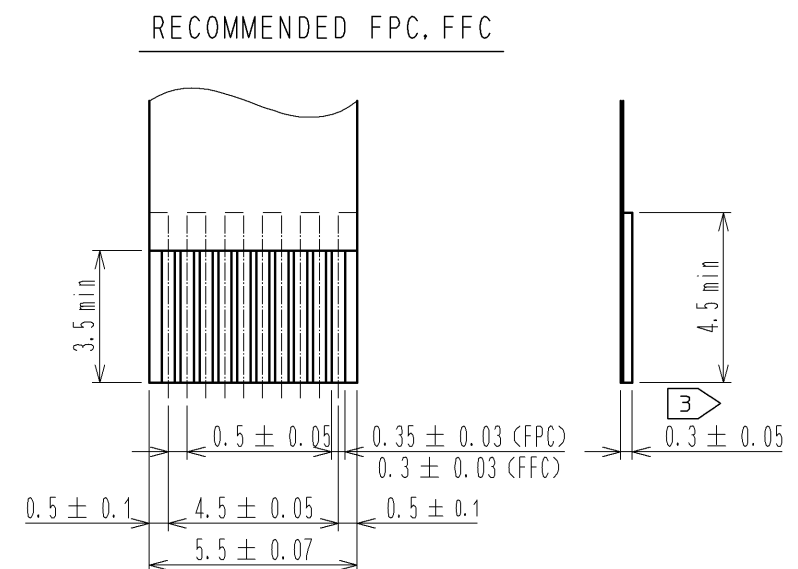


RECOMMENDED LAND PATTERN, METAL MASK

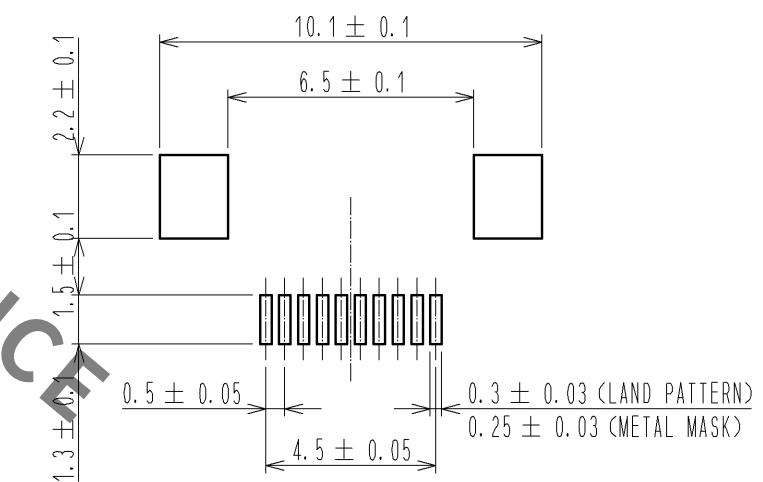

RECOMMENDED METAL MASK THICKNESS  $t=0.15$

|                                        |                 |                                                                      |            |                                          |                        |
|----------------------------------------|-----------------|----------------------------------------------------------------------|------------|------------------------------------------|------------------------|
| 4                                      | BRASS           | TIN PLATING $1 \mu\text{m}$ MIN OVER NICKEL $1 \mu\text{m}$ MIN.     | 8          | (CONNECTOR)                              |                        |
| 3                                      | PHOSPHOR BRONZE | GOLD PLATING $0.05 \mu\text{m}$ MIN OVER NICKEL $1 \mu\text{m}$ MIN. | 7          | POLYSTYRENE                              |                        |
| 2                                      | PPS             | (DEEP BROWN) UL94V-0                                                 | 6          | POLYESTER                                |                        |
| 1                                      | POLYAMIDE       | (BEIGE) UL94V-0                                                      | 5          | POLYSTYRENE                              |                        |
| NO.                                    | MATERIAL        | FINISH . REMARKS                                                     | NO.        | MATERIAL                                 | FINISH . REMARKS       |
| UNITS<br>mm                            | SCALE<br>5 : 1  |                                                                      | COUNT<br>1 | DESCRIPTION OF REVISIONS<br>DIS-F-002766 | DESIGNED<br>MK. YASUMI |
| HRS<br>HIROSE<br>ELECTRIC<br>CO., LTD. |                 | APPROVED : RI. TAKAYASU                                              | 07.02.05   | DRAWING<br>NO.                           | EDC3-150550-51         |
|                                        |                 | CHECKED : TN. KUWATA                                                 | 07.02.05   | PART<br>NO.                              | FH12A-10S-0.5SH(55)    |
|                                        |                 | DESIGNED : MK. YASUMI                                                | 07.02.02   | CODE<br>NO.                              | CL586-0550-9-55        |
|                                        |                 | DRAWN : MK. YASUMI                                                   | 07.02.02   |                                          |                        |
|                                        |                 |                                                                      |            |                                          | DATE<br>09.11.17       |

Jun.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

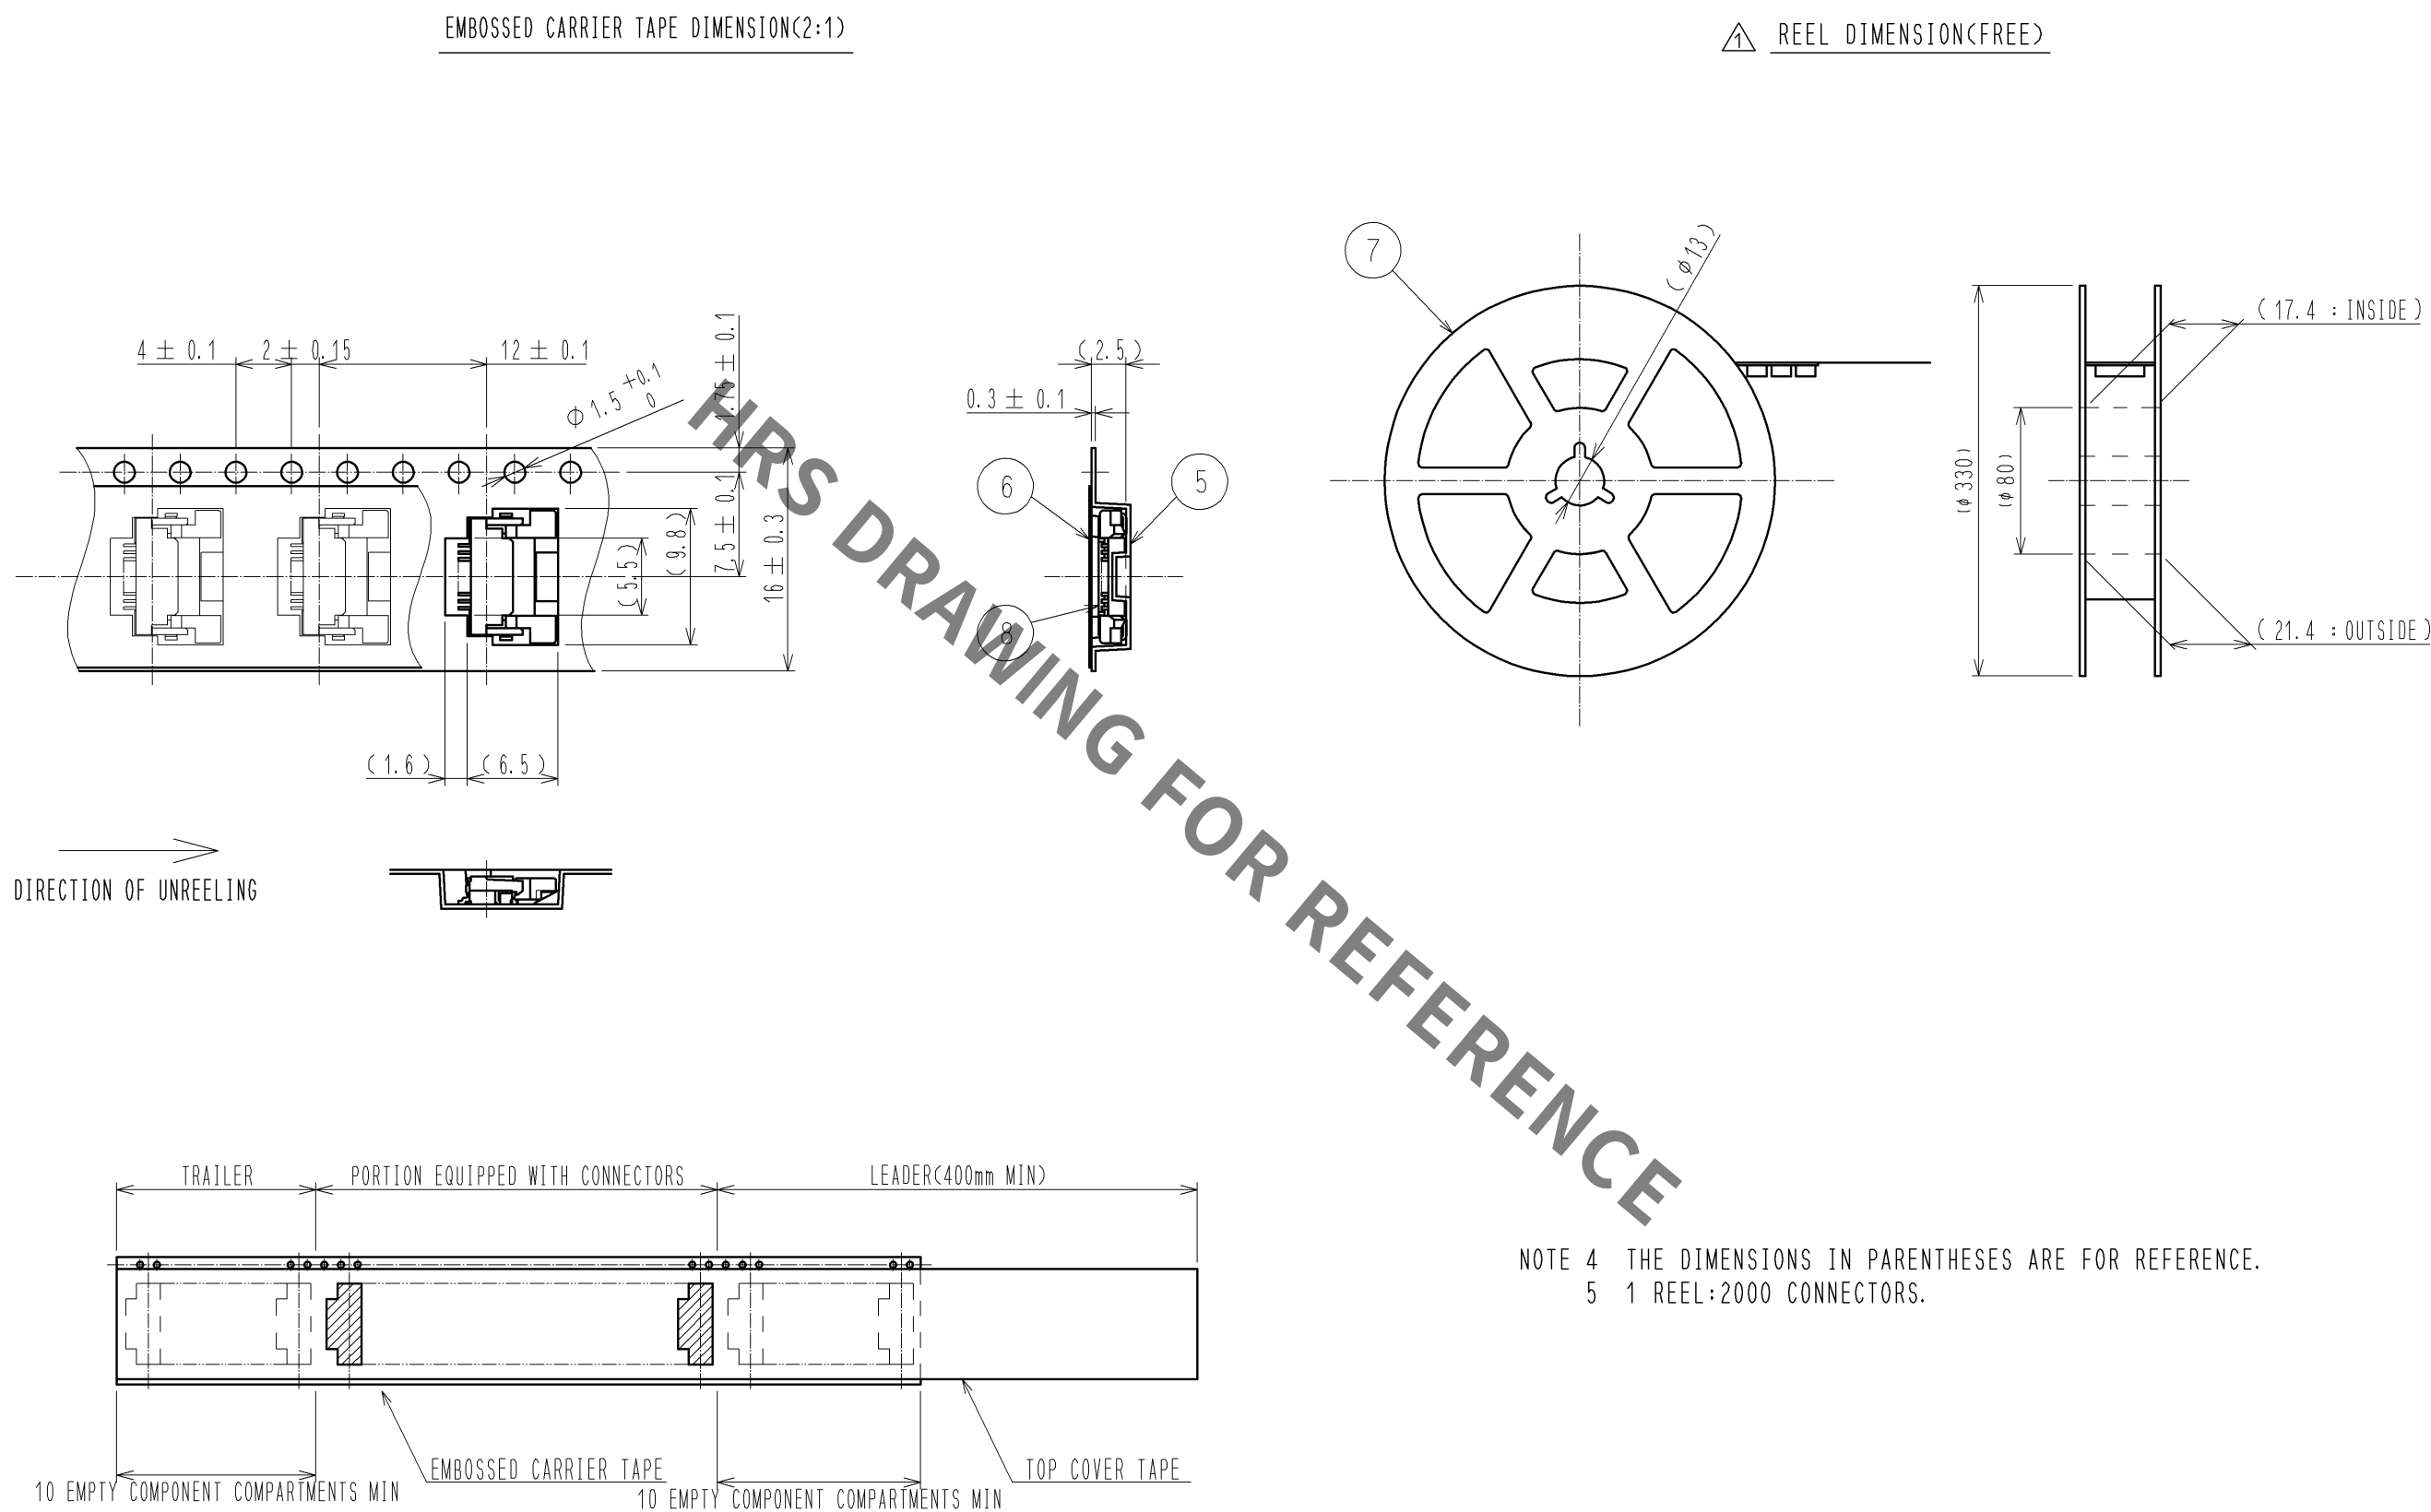

<DRAWING FOR PACKING>

|            |             |                     |
|------------|-------------|---------------------|
| <b>HRS</b> | DRAWING NO. | EDC3-150550-51      |
|            | PART NO.    | FH12A-10S-0.5SH(55) |
|            | CODE NO.    | CL586-0550-9-55     |
|            |             | <div>2/2</div>      |