

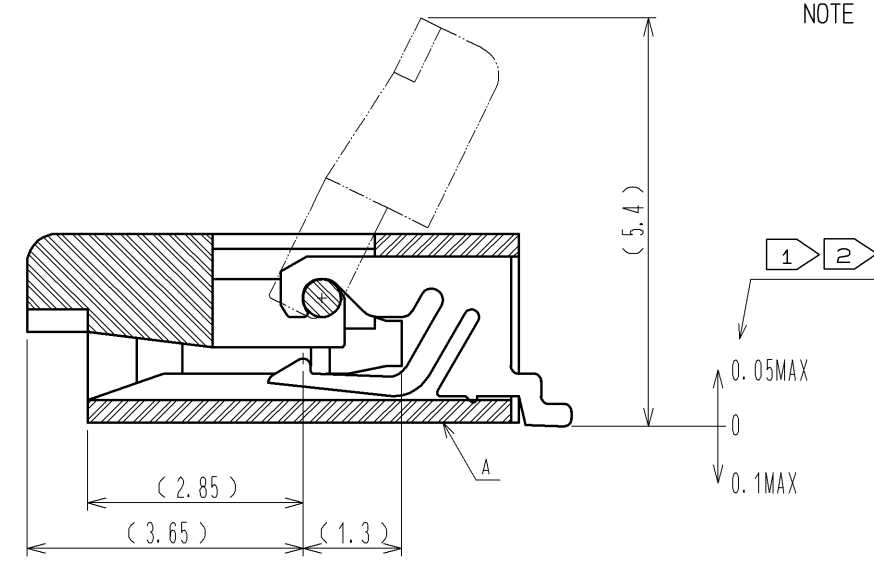
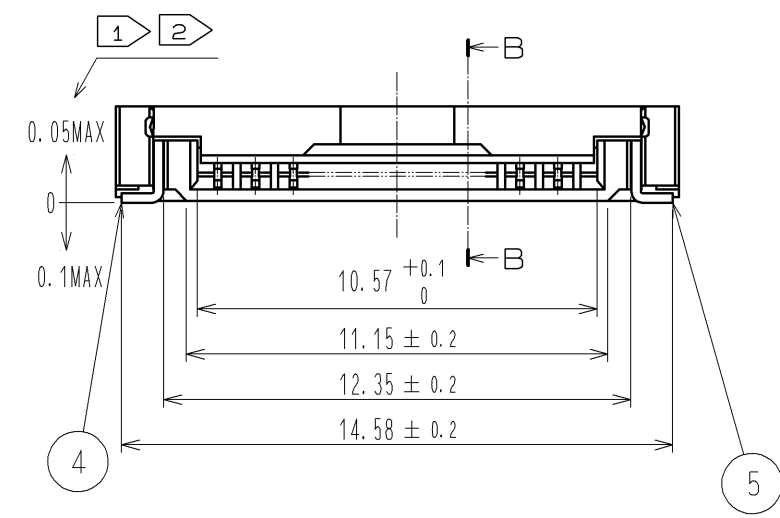



Jun.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

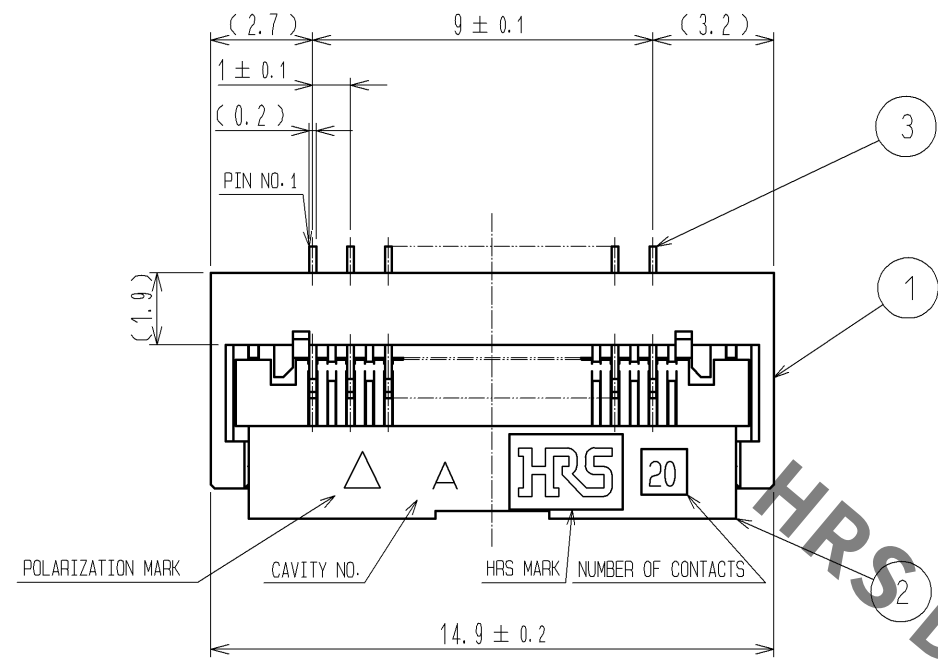

- NOTE
- 1 REFERENCE IS A.
 - 2 LEAD CO-PLANARITY SHALL BE 0.1 MAX.
 - 3 THICKNESS OF SUPPORTING TAPE SHALL BE 0.188(7.5mil) MIN.

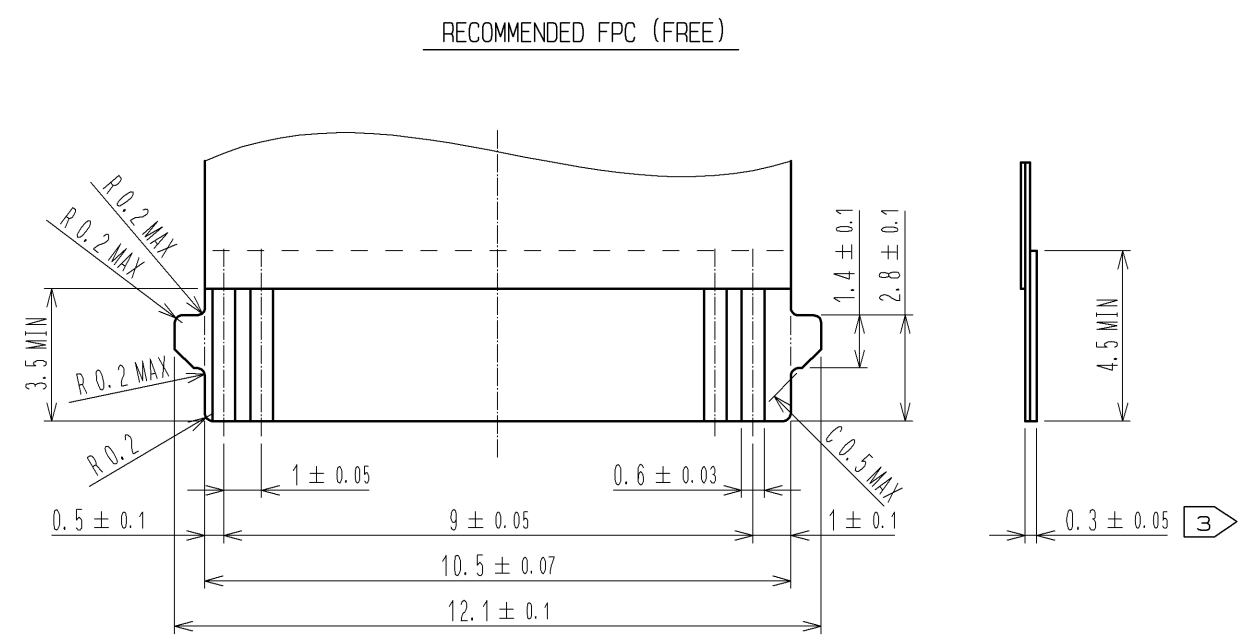


RECOMMENDED LAND PATTERN, METAL MASK(FREE)

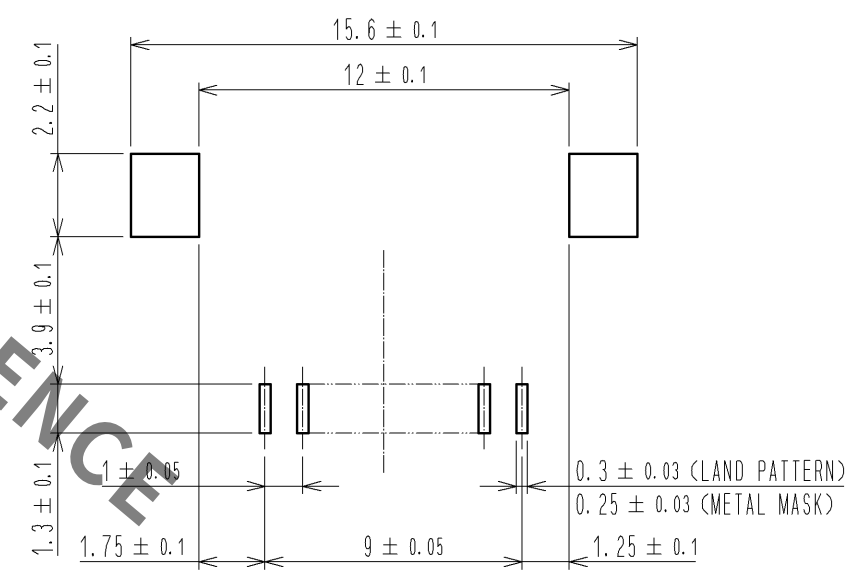

RECOMMENDED METAL MASK THICKNESS: t=0.15

5	BRASS	TIN PLATING 1#mMIN OVER NICKEL 1#mMIN			
4	BRASS	TIN PLATING 1#mMIN OVER NICKEL 1#mMIN	9	(CONNECTOR)	
3	PHOSPHOR BRONZE	GOLD PLATING 0.05#mMIN OVER NICKEL 1#mMIN	8	POLYSTYRENE	
2	LCP	(BLACK) UL94V-0	7	POLYESTER	
1	LCP	(GRAY) UL94V-0	6	POLYSTYRENE	
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 5 : 1	COUNT △	DESCRIPTION OF REVISIONS	DESIGNED
HRS		HIROSE ELECTRIC CO., LTD.	APPROVED : RI. TAKAYASU 09.10.19	DESIGNED : HS. SAKAMOTO 09.10.19	CHECKED : MK. YASUMI 09.10.17
			DRAWN : MK. YASUMI 09.10.17	DRAWING NO. EDC3-327247-01	PART NO. FH28D-20(10)SB-1SH(C05)
				CODE NO. CL586-1863-0-05	DATE 1/2

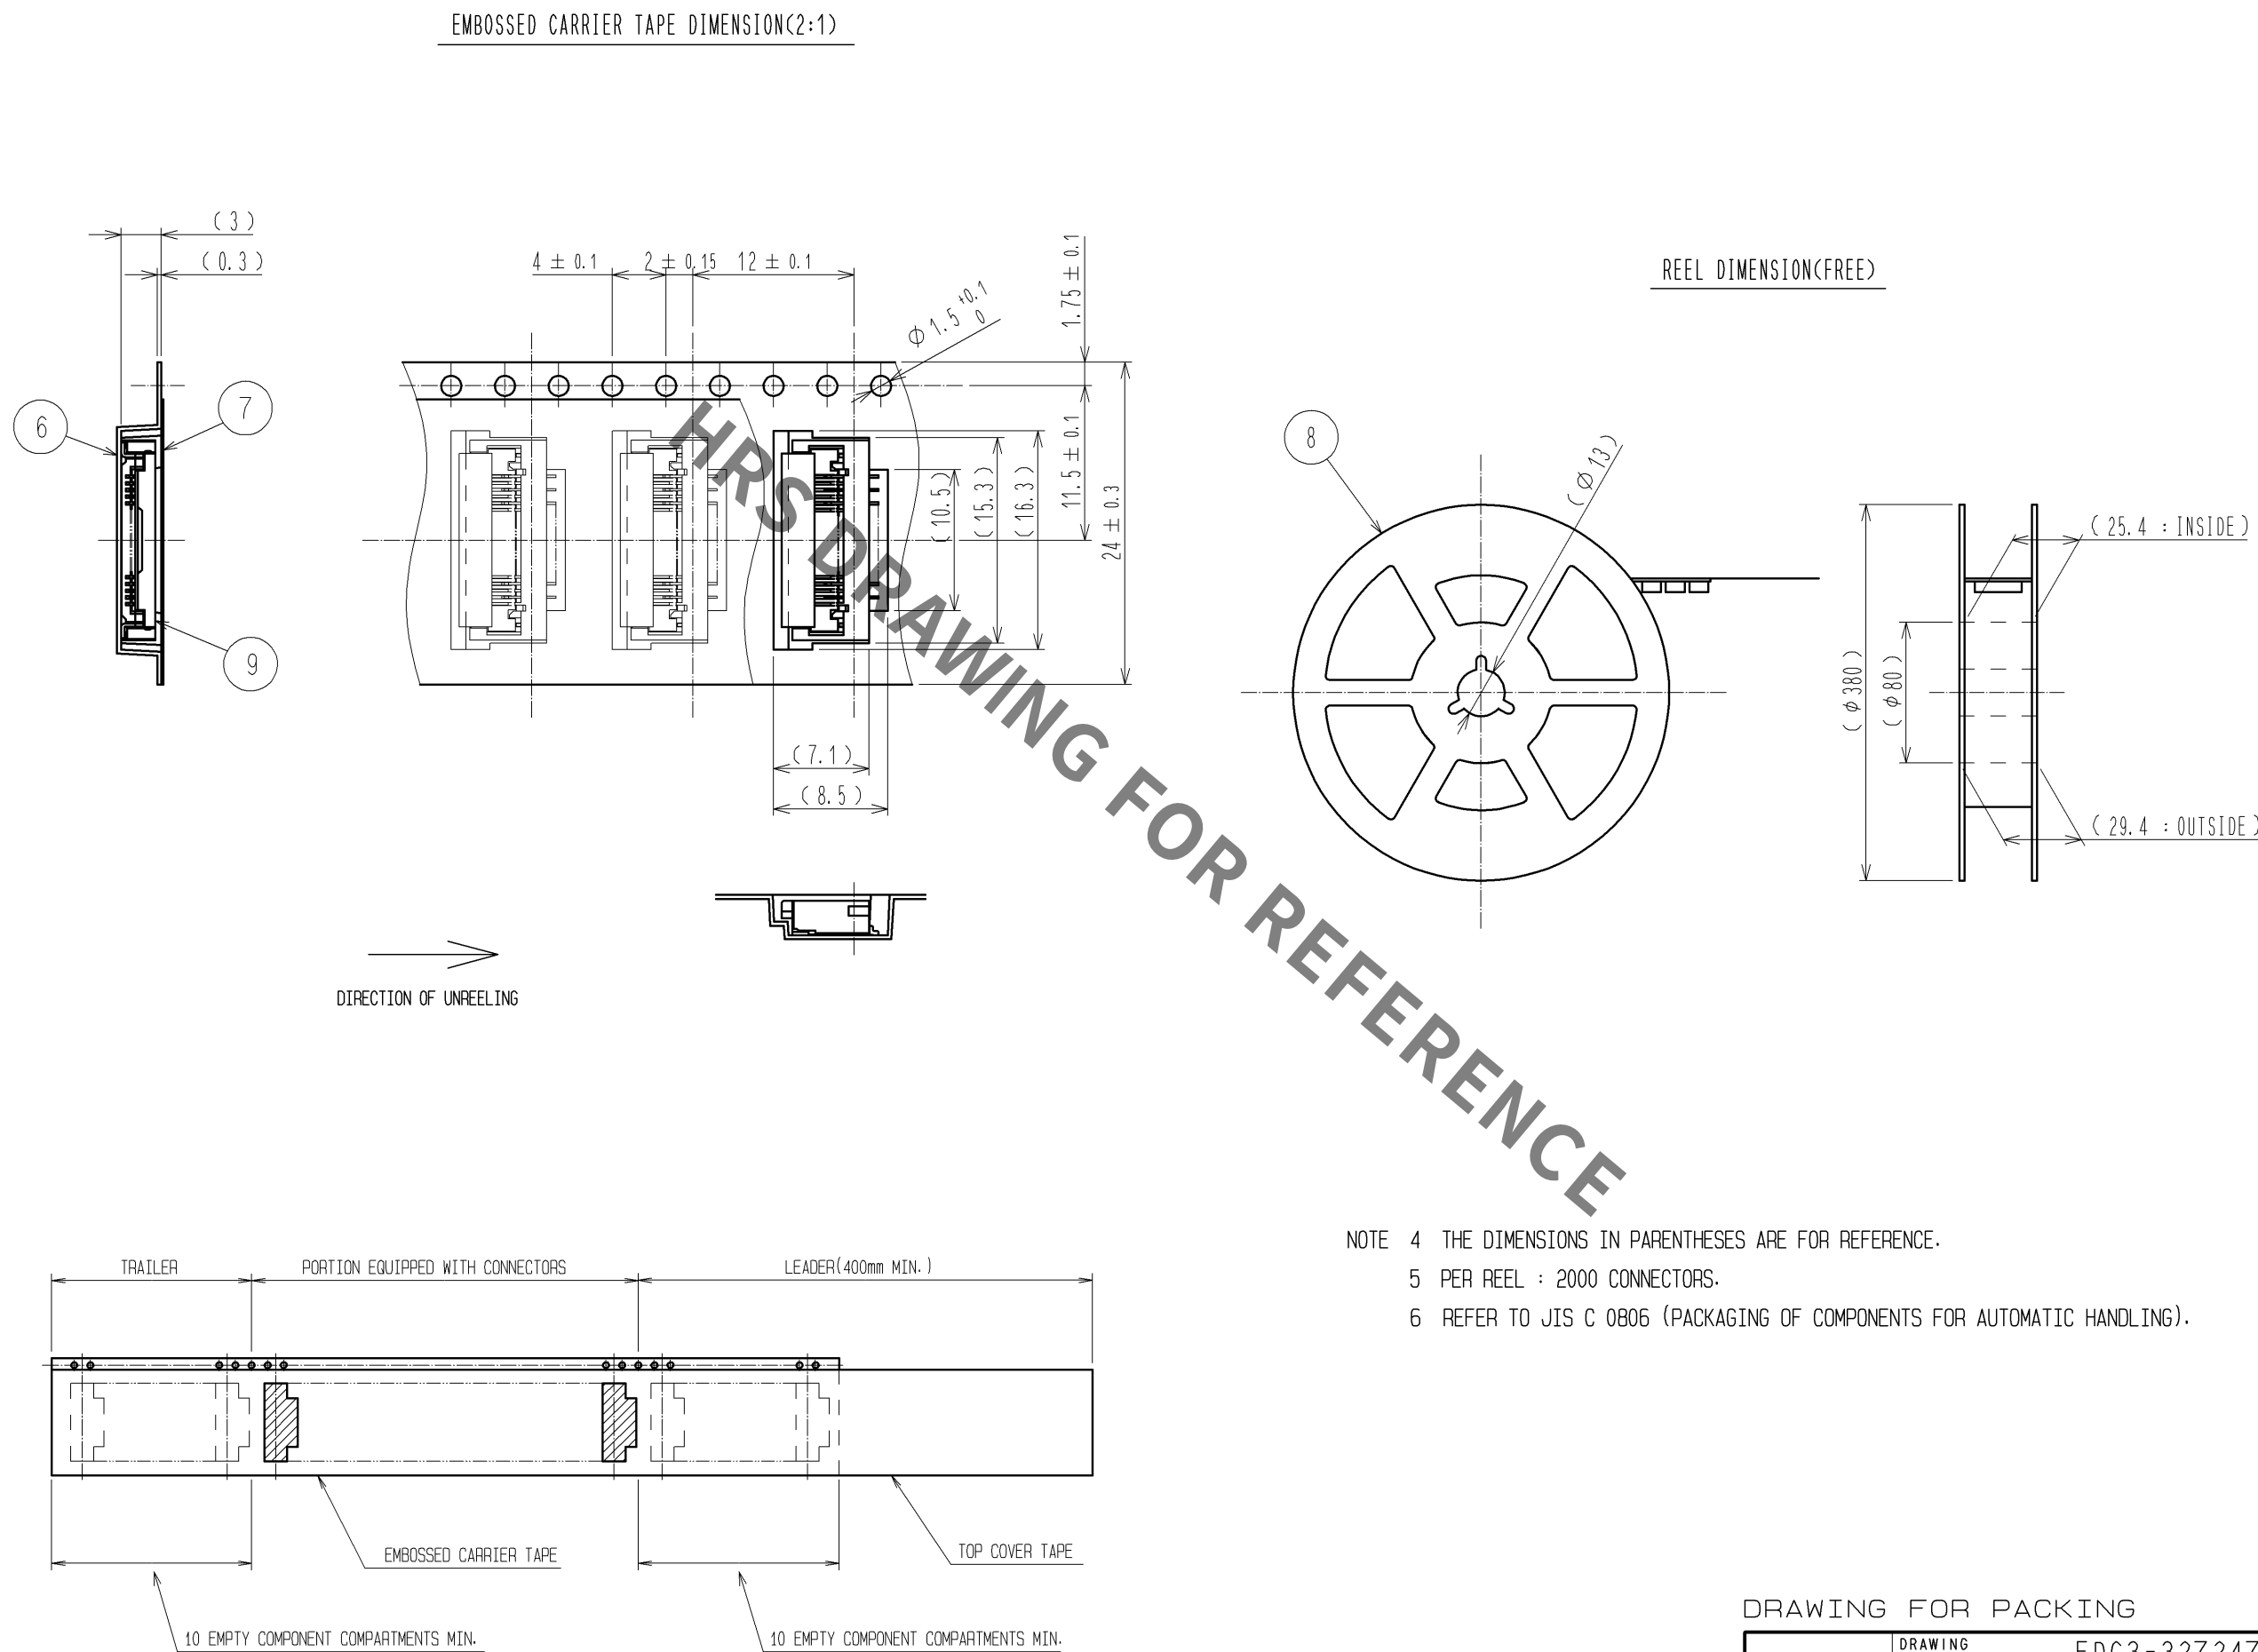

HRS	DRAWING NO.	EDC3-327247-01	
	PART NO.	FH28D-20<10>SB-1SH<05>	
	CODE NO.	CL586-1863-0-05	△2/2