
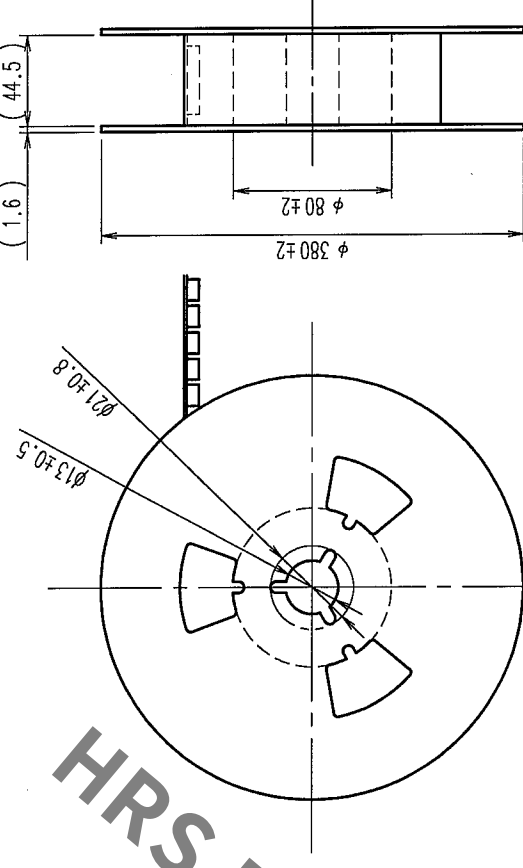


	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
	△				• •	△				• •
	△				• •	△				• •
	△				• •	△				• •

THE DIRECTION OF PULLING OUT

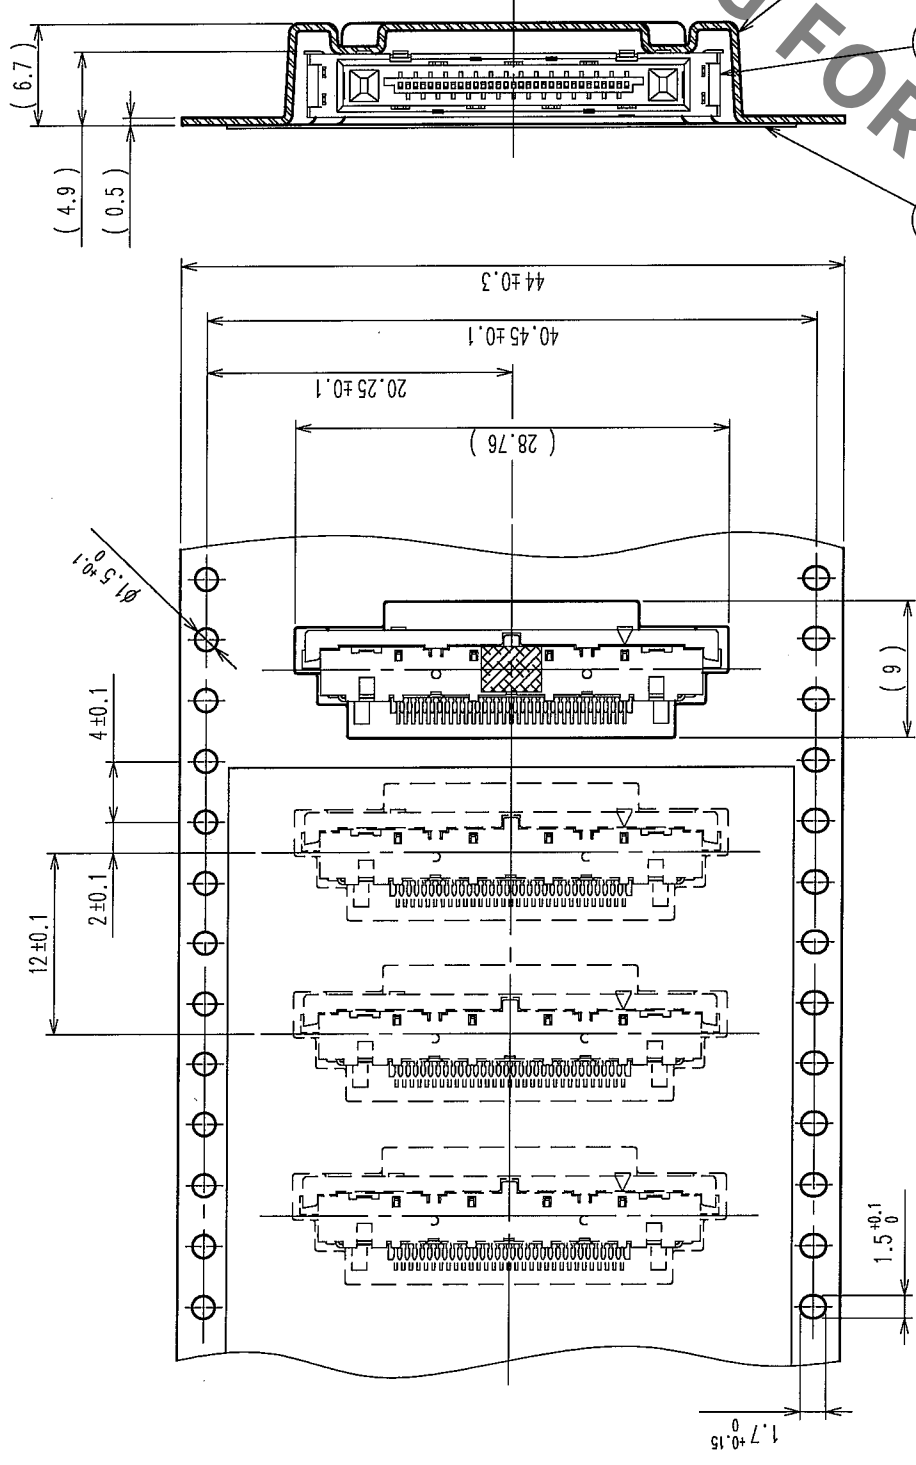

REELED DIMENSION (FREE)

NOTE 1. 1 REEL : 1000 CONNECTORS.

The diagram illustrates the layout of a cable assembly. It is divided into three main sections: a TRAILER section, an EQUIPED section containing 1000 connectors, and a LEADER section with a minimum length of 400mm. The assembly is bounded by TOP COVER TAPE and EMBOSS CARRIER TAPE. Specific areas are designated for 10 empty component compartments, each with a minimum length.

1	PS	EMBOSS CARRIER TAPE	3	CONNECTOR
			2	POLYESTER
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL
CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED
CL			K. SHIBUYA	H. YAMAGUCHI
		05.08.04	05.08.04	05.08.05
DRAWING NO.		PART NO.		
EDC3-155934		FX15S-31S-0.5SH		
SCALE				
2 : 1				
UNITS		CODE NO.		
mm		CL575-2306-5		
		HIROSE ELECTRIC CO., LTD		
		HRS		
		2		