


Apr.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

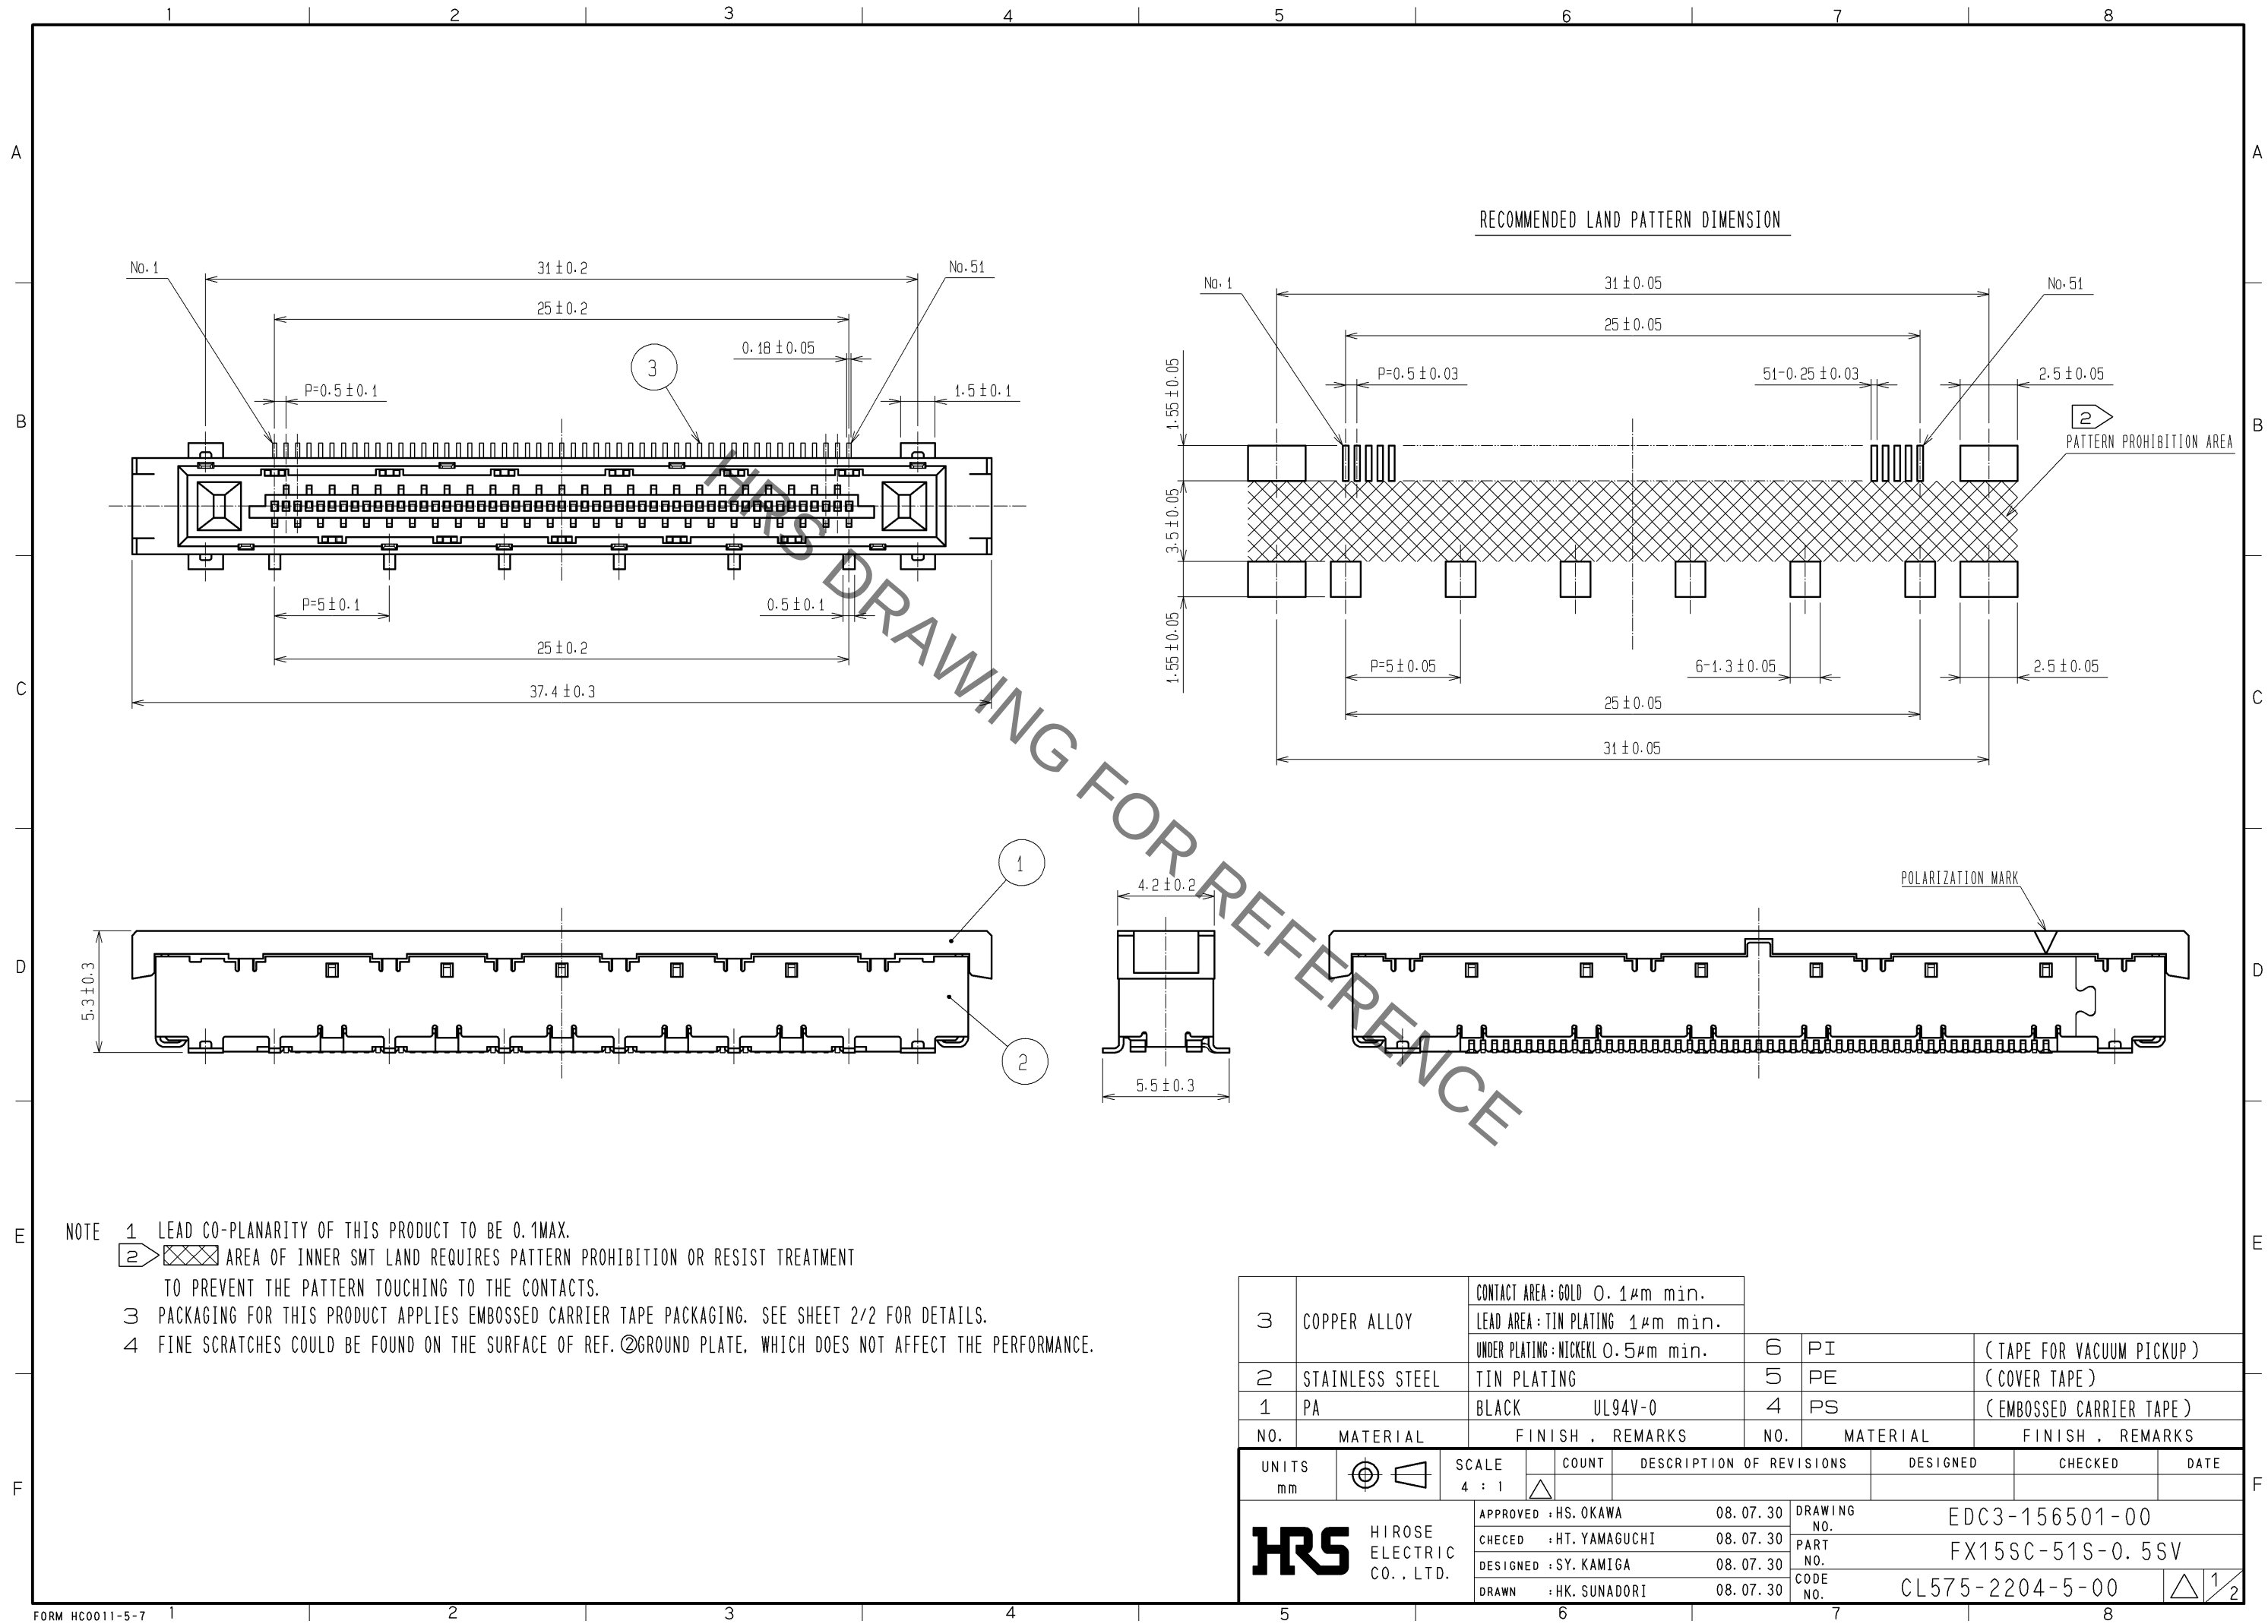



- NOTE
- 1 LEAD CO-PLANARITY OF THIS PRODUCT TO BE 0.1MAX.
 - 2 AREA OF INNER SMT LAND REQUIRES PATTERN PROHIBITION OR RESIST TREATMENT TO PREVENT THE PATTERN TOUCHING TO THE CONTACTS.
 - 3 PACKAGING FOR THIS PRODUCT APPLIES EMBOSSED CARRIER TAPE PACKAGING. SEE SHEET 2/2 FOR DETAILS.
 - 4 FINE SCRATCHES COULD BE FOUND ON THE SURFACE OF REF. ②GROUND PLATE, WHICH DOES NOT AFFECT THE PERFORMANCE.

3	COPPER ALLOY	CONTACT AREA: GOLD 0.1μm min.	6	PI	(TAPE FOR VACUUM PICKUP)
		LEAD AREA: TIN PLATING 1μm min.			
		UNDER PLATING: NICKEL 0.5μm min.			
2	STAINLESS STEEL	TIN PLATING	5	PE	(COVER TAPE)
1	PA	BLACK UL94V-0	4	PS	(EMBOSSED CARRIER TAPE)
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm					
		SCALE 4 : 1	COUNT △	DESCRIPTION OF REVISIONS	
		DESIGNED		CHECKED	DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	08.07.30	DRAWING NO.	EDC3-156501-00
		CHECKED : HT. YAMAGUCHI	08.07.30	PART NO.	FX15SC-51S-0.5SV
		DESIGNED : SY. KAMIGA	08.07.30	CODE NO.	CL575-2204-5-00
		DRAWN : HK. SUNADORI	08.07.30		△ 1/2



Apr.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

SPECIFICATION DRAWING OF PACKING (2 : 1)

THE DIRECTION OF PULLING OUT

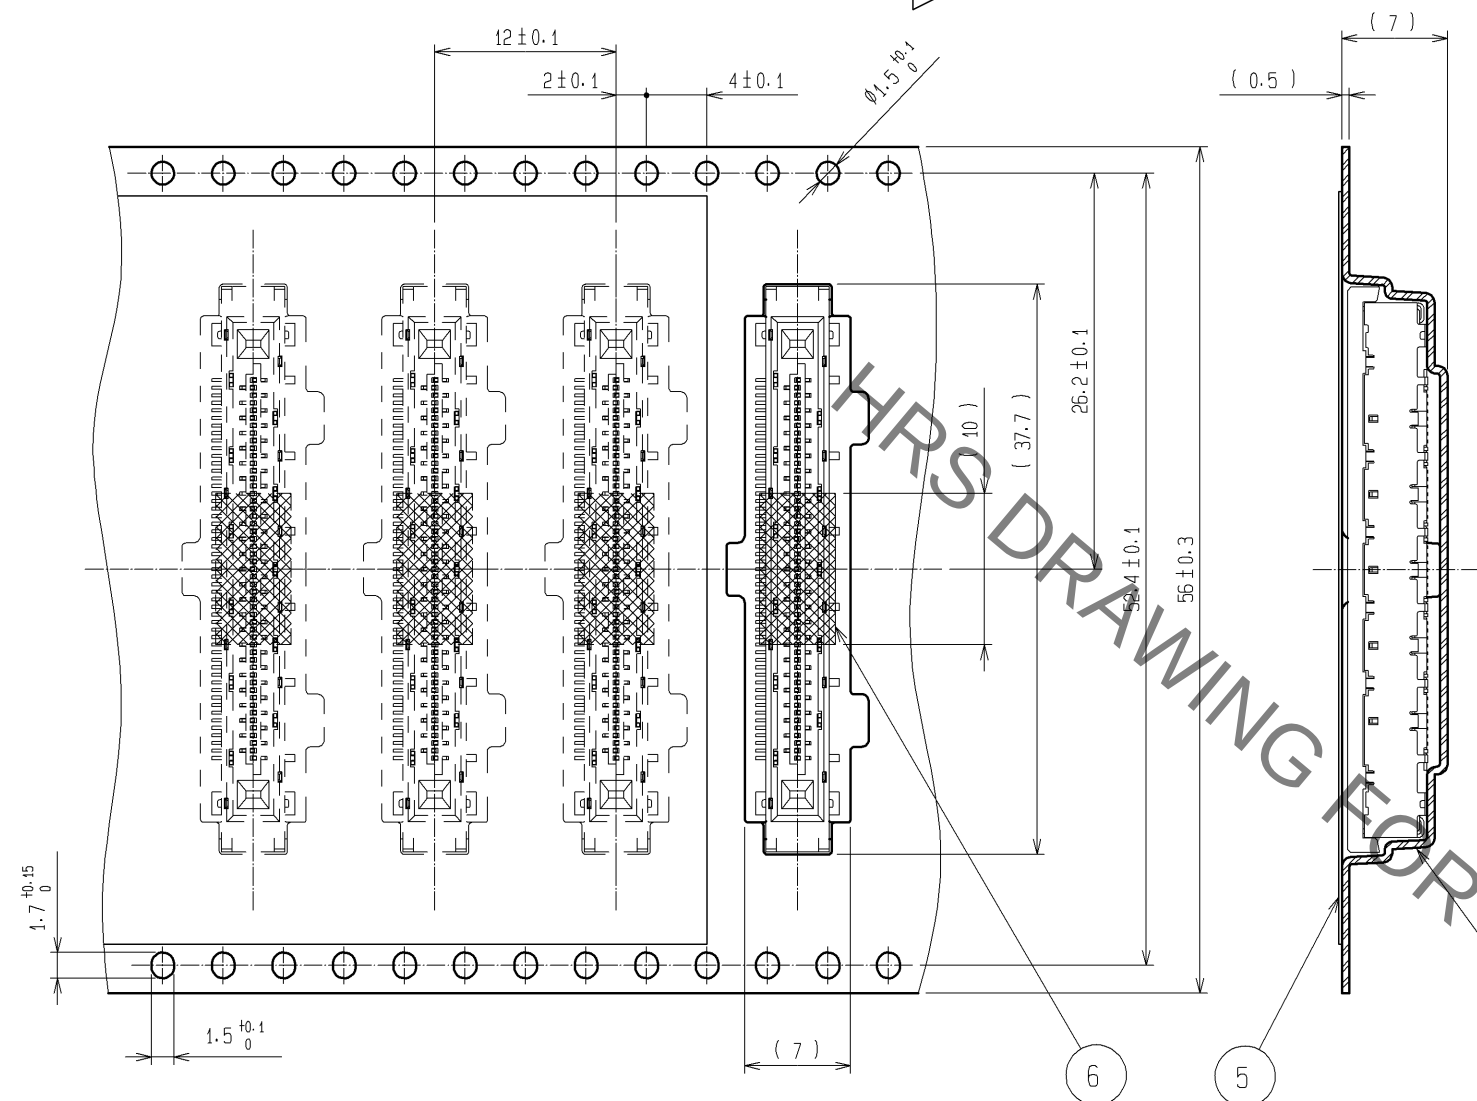

REELED DIMENSION (FREE)

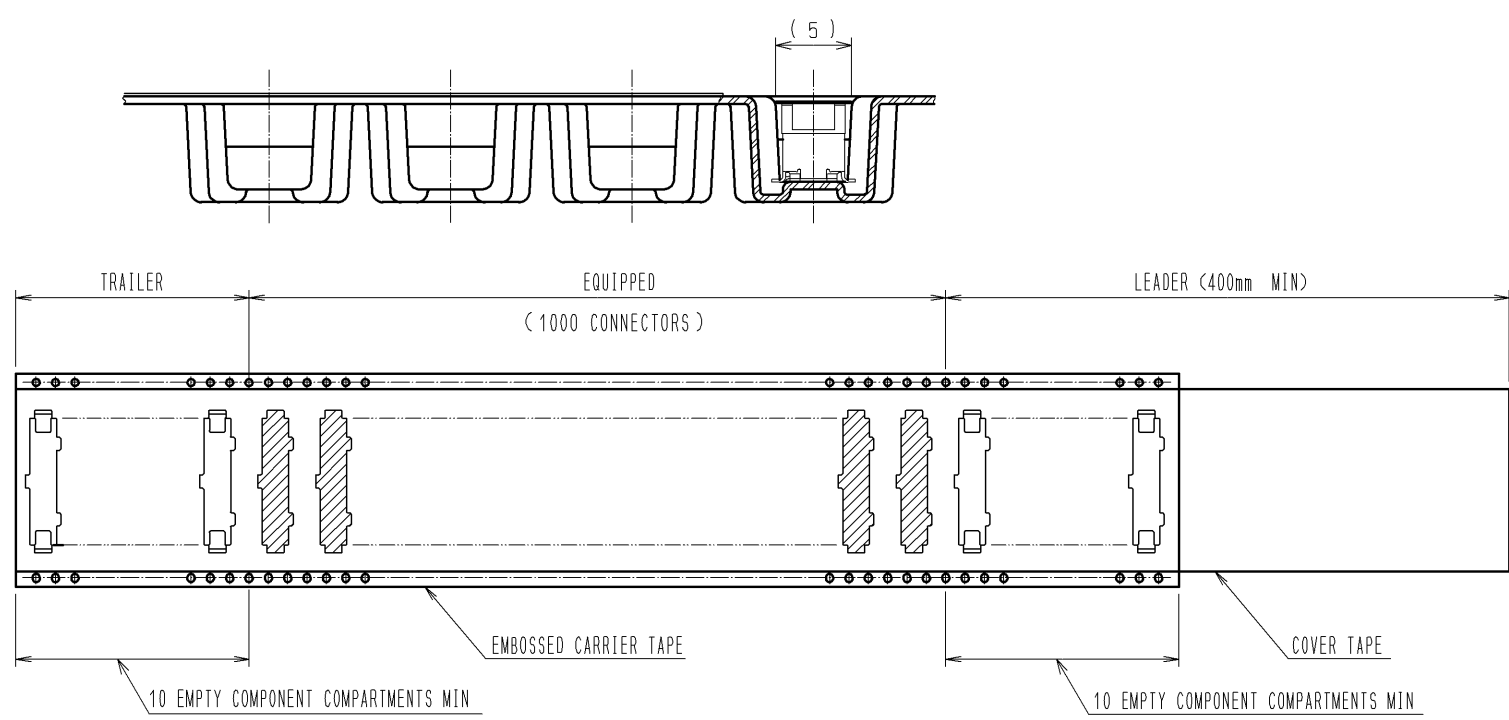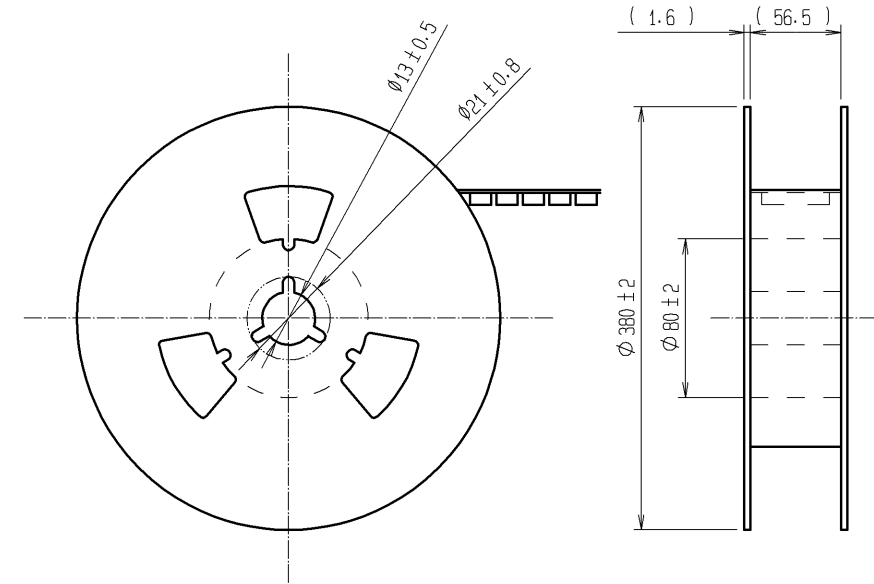

HRS	DRAWING NO.	EDC3-156501-00		2/2
	PART NO.	FX15SC-51S-0.5SV		
	CODE NO.	CL575-2204-5-00		