
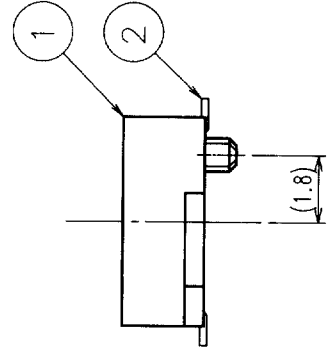
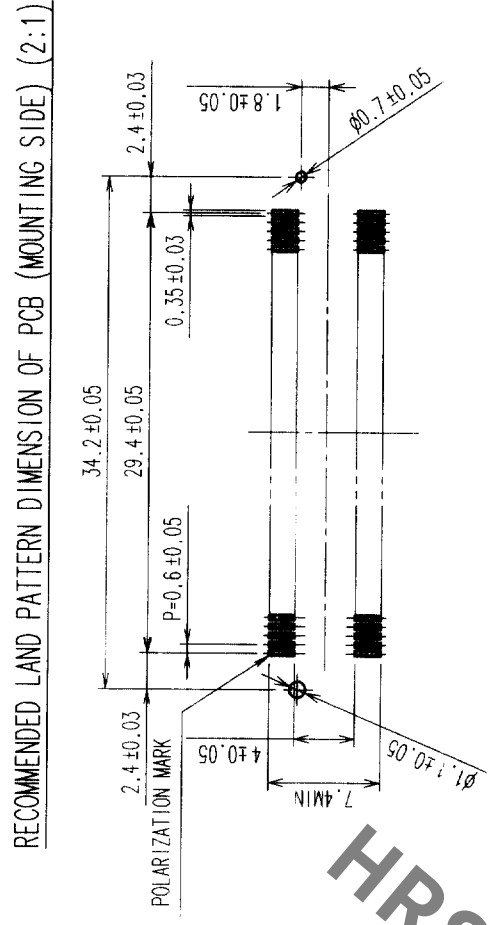
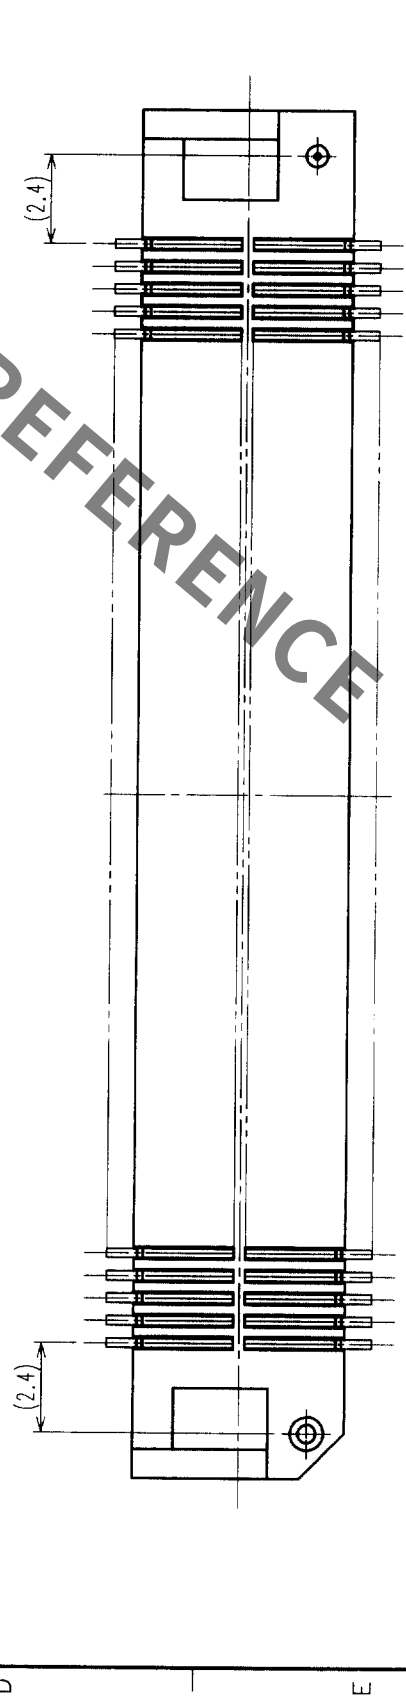
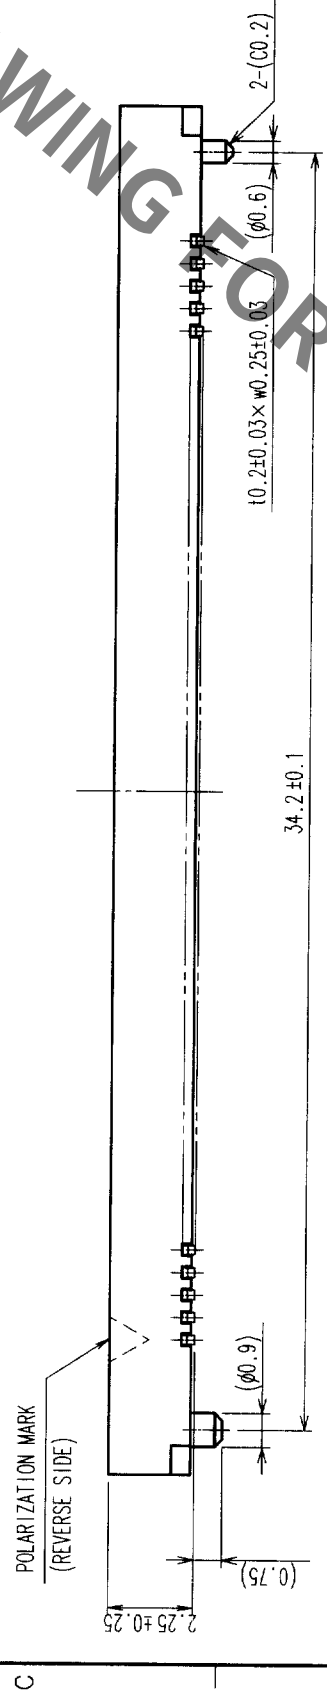
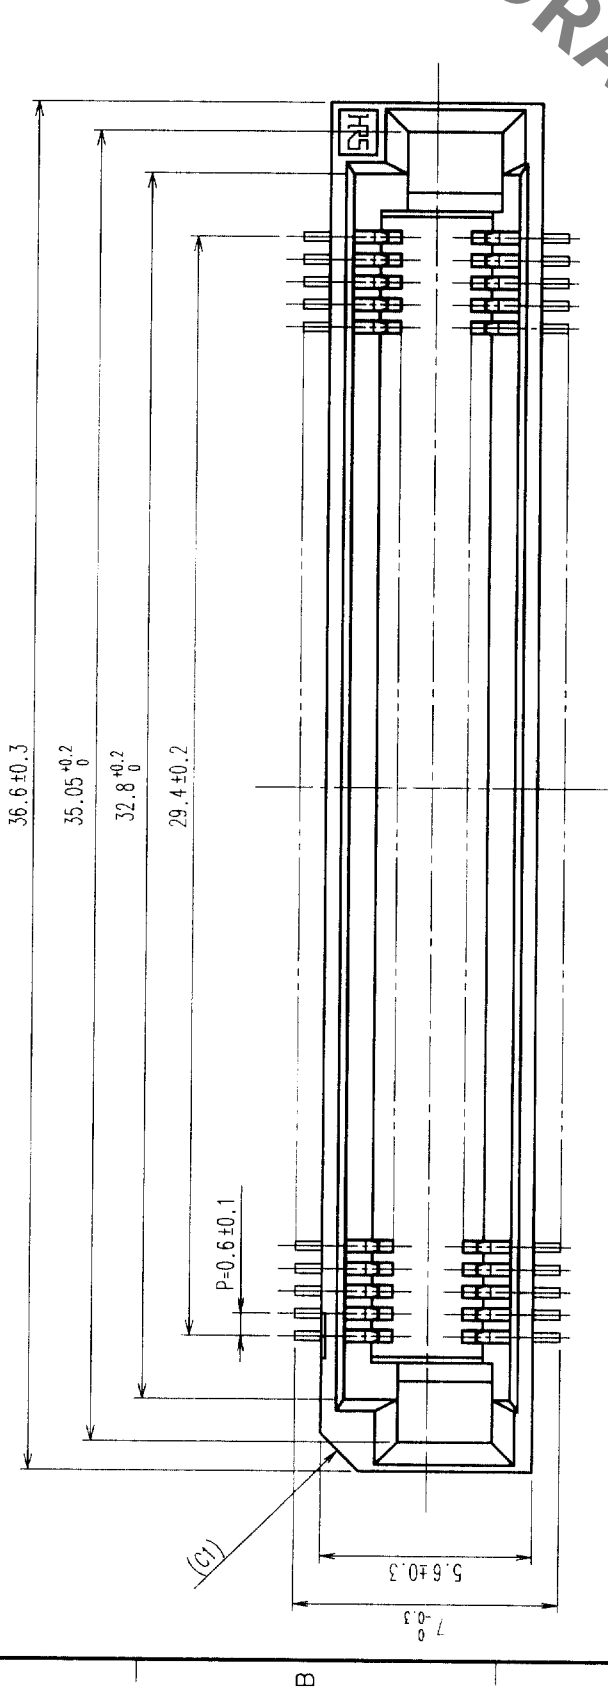


		DESCRIPTION OF REVISIONS		BY	CHKD	DATE	DESCRIPTION OF REVISIONS		BY	CHKD	DATE
	COUNT							COUNT			
△						.	△				.
△						.	△				.
△						.	△				.



NOTE

1. LEAD CO-PLANARITY SHALL BE 0.1mm.
2. EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED FOR THIS PRODUCT.
SEE SHEET 2/2 FOR DETAILS.
3. FOR MODIFICATION ,ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED
ACCORDING TO CIRCUMSTANCES.

1	PPS	LIGHT BROWN	UL94V-0	2	PHOSPHOR BRONZE	CONTACT AREA-GOLD PLATED (0.1µm) OVER NICKEL THE OTHER AREA-GOLD PLATED (FLASH) OVER NICKEL	
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS	
CODE NO. (OLD)				DRAWN	DESIGNED	CHECKED	APPROVED
CL				 02.36.14 02.06.18 02.06.19			
DRAWING NO.		EDC3-150676-02		PART NO.		FX8-100S-SV(22)	
SCALE		5 : 1		CODE NO.		CL578-0205-6-22	
UNITS		mm		HIROSE ELECTRIC CO., LTD		1/2	

TO	PCK			
----	-----	--	--	--

