


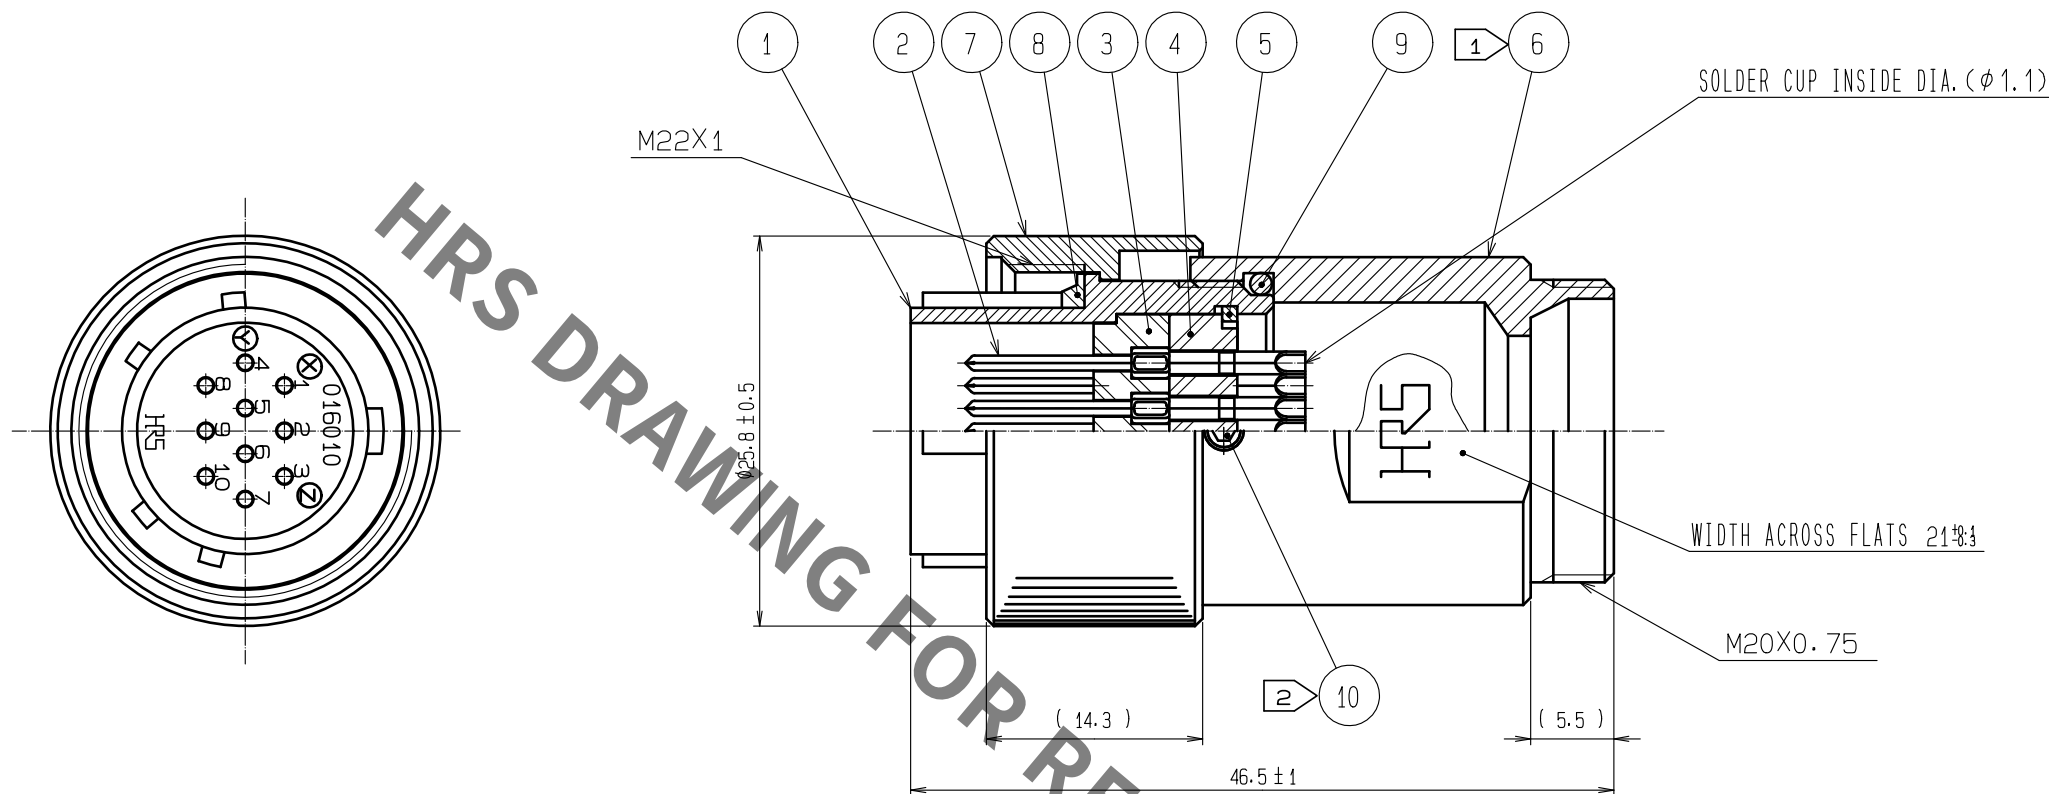

- NOTES
- 1 THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑥ TO BE 3 TO 3.5 N·m.
 - 2 THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑩ TO BE 0.2 TO 0.25 N·m.
 - 3 ROTATION EXAMPLES OF REF. NOS. ① AND ⑥ ARE SHOWN.
 - 4 SCREW OF REF. NO. ①, ⑥, ⑩, LOCTITE 263, OR EQUIVALENT, HENKEL JAPAN IS RECOMMENDED TO PREVENT FROM LOOSENING.
 - 5 THIS PRODUCT TO BE USED WITH CABLECLAMP, JR16WCC-※(31).
※ DESIGNATE DIAMETER OF APPLICABLE CABLE.

5	PHOSPHOR BRONZE	NICKEL PLATING	10	STAINLESS STEEL	
4	PHENOL-FORMALDEHYDE	(BLACK) UL94V-0	9	NBR	(BLACK)
3	PHENOL-FORMALDEHYDE	(BLACK) UL94V-0	8	NBR	(BLACK)
2	COPPER ALLOY	SILVER PLATING 3μm min.	7	BRASS	BLACK CHROME PLATING
1	ALUMINUM ALLOY	BLACK CHROME PLATING	6	BRASS	BLACK CHROME PLATING
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT	DESCRIPTION OF REVISIONS	
DESIGNED		CHECKED		DATE	
APPROVED : HY. KOBAYASHI		18. 02. 22		DRAWING NO. EDC-110562-31-00	
CHECKED : HY. KOBAYASHI		18. 02. 22		PART NO. JR16WP-10P(31)	
DESIGNED : TH. KAMEYA		18. 02. 22		CODE NO. CL114-2004-3-31	
DRAWN : MK. INOUE		18. 02. 13		1/1	