


APPLICABLE STANDARD					
RATING	OPERATING TEMPERATURE RANGE	-30°C TO +80°C	STORAGE TEMPERATURE RANGE	-45°C TO +85°C	
	VOLTAGE	AC100V	OPERATING HUMIDITY RANGE	5 % TO 95 %	
	CURRENT	SIGNAL 0.5A (UNSELECTED 4 CONTACTS:1A)	APPLICABLE CABLE	—	
SPECIFICATIONS					
ITEM		TEST METHOD	REQUIREMENTS	QT	AT
CONSTRUCTION					
GENERAL EXAMINATION		VISUALLY AND BY MEASURING INSTRUMENT.	ACCORDING TO DRAWING.	X	X
MARKING		CONFIRMED VISUALLY.		X	X
ELECTRIC CHARACTERISTICS					
CONTACT RESISTANCE		100 mA (DC OR 1000 Hz).	60 mΩ MAX.	X	—
INSULATION RESISTANCE		250 V DC.	1000 MΩ MIN.	X	—
VOLTAGE PROOF		350 V AC FOR 1 min.	NO FLASHOVER OR BREAKDOWN.	X	X
MECHANICAL CHARACTERISTICS					
LOCK STRENGTH		APPLYING A PULL FORCE 49 N MAX., TO THE CABLE AXIALLY.	1) DURING APPLYING, MATING COMPLETELY. 2) AFTER APPLYING, NO DEFECT OF MATING PART.	X	—
INSERTION AND WITHDRAWAL FORCES		MEASURED BY APPLICABLE CONNECTOR. (EXCEPT LOCK)	29.4 N MAX.	X	—
MECHANICAL OPERATION		10000 TIMES INSERTIONS AND EXTRACTIONS.	1) CONTACT RESISTANCE: 100 mΩ MAX. 2) NO DAMAGE, CRACK AND LOOSENESS, OF PARTS.	X	—
VIBRATION		FREQUENCY 10 TO 55 Hz, SINGLE AMPLITUDE 0.76 mm, AT 2 h, FOR 3 DIRECTIONS.	1) NO ELECTRICAL DISCONTINUITY OF 10 μs. 2) NO DAMAGE, CRACK AND LOOSENESS, OF PARTS.	X	—
SHOCK		490 m/s ² DIRECTIONS OF PULSE 11 ms AT 3 TIMES FOR 6 DIRECTIONS.		X	—
ENVIRONMENTAL CHARACTERISTICS					
RAPID CHANGE OF TEMPERATURE		TEMPERATURE -55 → 5 ~ 35 → 85 → 5 ~ 35°C TIME 30 → 5 → 30 → 5 min. UNDER 5 CYCLES.	1) CONTACT RESISTANCE: 100 mΩ MAX. 2) NO DAMAGE, CRACK AND LOOSENESS, OF PARTS. 3) INSULATION RESISTANCE: 1000 MΩ MIN.	X	—
DAMP HEAT (STEADY STATE)		EXPOSED AT 40 °C, 90~95 %, 96 h.	1) CONTACT RESISTANCE: 100 mΩ MAX. 2) INSULATION RESISTANCE: 10 MΩ MIN.	X	—
CORROSION SALT MIST		EXPOSED IN 5 % SALT WATER SPRAY FOR 48 h.	NO HEAVY CORROSION.	X	—
	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
△					
REMARK			APPROVED	NM. NISHIMATSU	15. 10. 27
			CHECKED	KN. ICHIKAWA	15. 10. 27
			DESIGNED	TS. ITO	15. 10. 27
			DRAWN	AK. AKIYAMA	15. 10. 27
Unless otherwise specified, refer to IEC 60512.					
Note QT:Qualification Test AT:Assurance Test X:Applicable Test			DRAWING NO.	ELC-124422-30-00	
HRS	SPECIFICATION SHEET		PART NO.	ST60-36P (30)	
	HIROSE ELECTRIC CO., LTD.		CODE NO.	CL241-0033-1-30	△ 1/2

ATTACHMENT FIGURE

FIG-1 RECOMENDED REFLOW
TEMPERATURE PROFILE

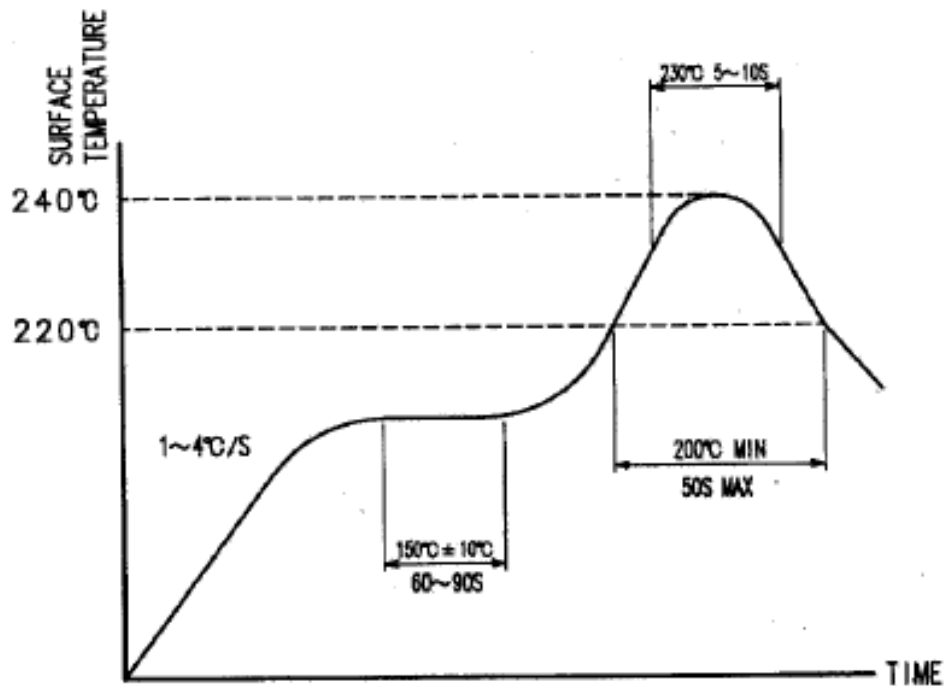

NOTE. THIS IS RECOMMENDED TEMPERATURE PROFILE.
CONDITIONS COULD BE VARIED
DIPEND ON SORTS OF CREAM.

Note QT:Qualification Test AT:Assurance Test X:Applicable Test

DRAWING NO.

ELC-124422-30-00

HRS

SPECIFICATION SHEET

PART NO.

ST60-36P (30)

HIROSE ELECTRIC CO., LTD.

CODE NO

CL241-0033-1-30



2/2