



HONEYWELL PART NUMBER
111SM1-H58
PRODUCT CODE TYJ0145

REV	DOCUMENT	CHANGED BY	CHECK
9	0038225	PRS 04APR08	BLR

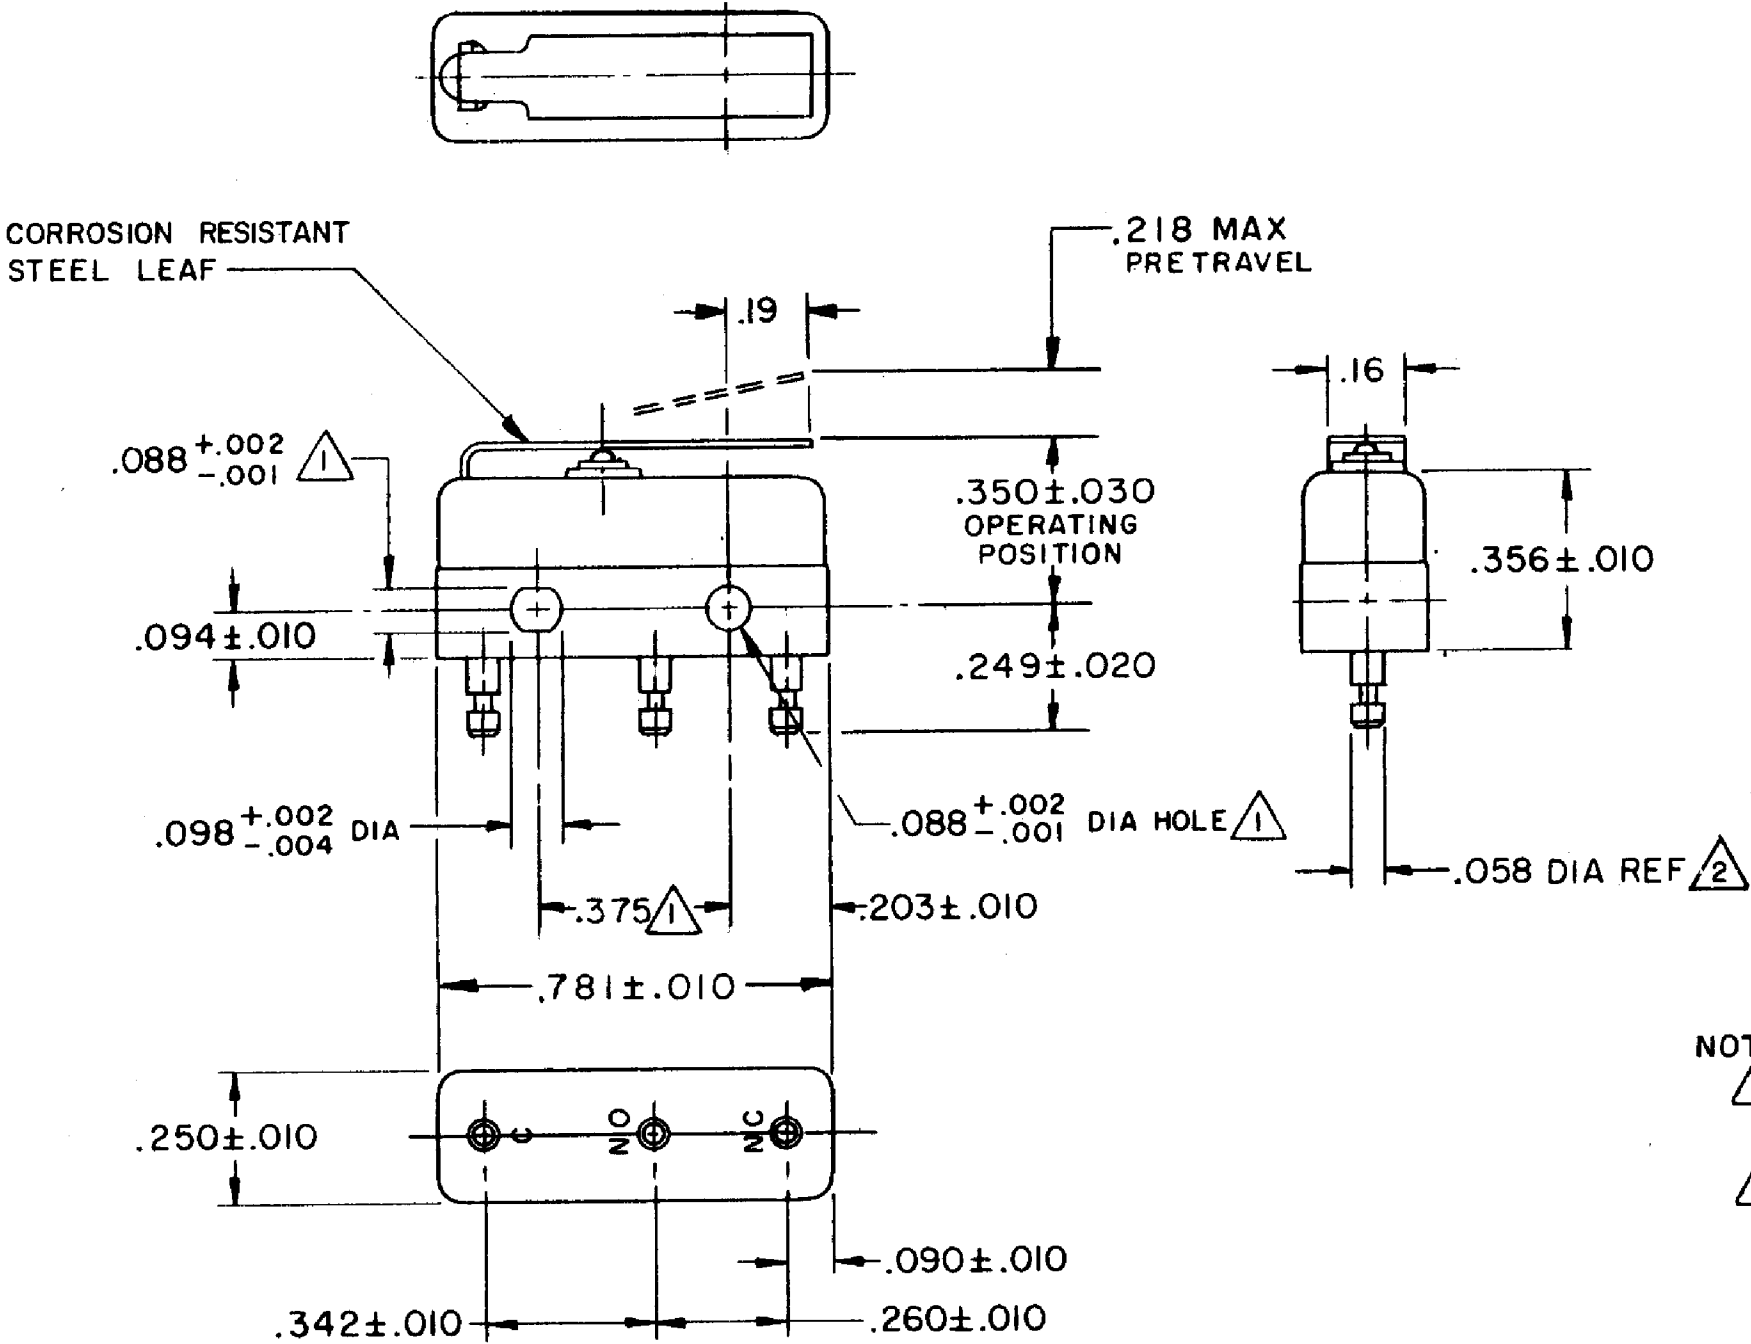

NOTE -
(1) MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
(2) PLATED TERMINALS WILL ACCEPT "AMP INC" .058 DIA PIN RECEPTACLES.

RELEASE NO. PR - 405
REPLACES -

CHARACTERISTICS	ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± - ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± - ANGLES ± -	DRAWN	VK	23 OCT 07	Honeywell			
OPERATING FORCE – – – – 7 OZ MAX	CONTACT ARRANGEMENT SPDT				CHECK	RJ	23 OCT 07				
RELEASE FORCE – – – – 2 OZ MIN	30 VOLTS DC RATING				THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC			
DIFFERENTIAL TRAVEL – – – .030 MAX		SEA LEVEL	50,000 FT								
OVERTRAVEL – – – – – .030 MIN	INDUCTIVE	3 AMP	2.5 AMP		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME	REV
	RESISTIVE	5 AMP	5 AMP					B	I	111SM1-H58	9
	MAXIMUM INRUSH 24 AMP			THIRD ANGLE PROJECTION 	RASTER			SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1
APPROVALS	KEMA, CE	5A, 250V ~ T85 1E4  									
	UL, CSA	5A, 250 VAC ~  	BRAND L4								