
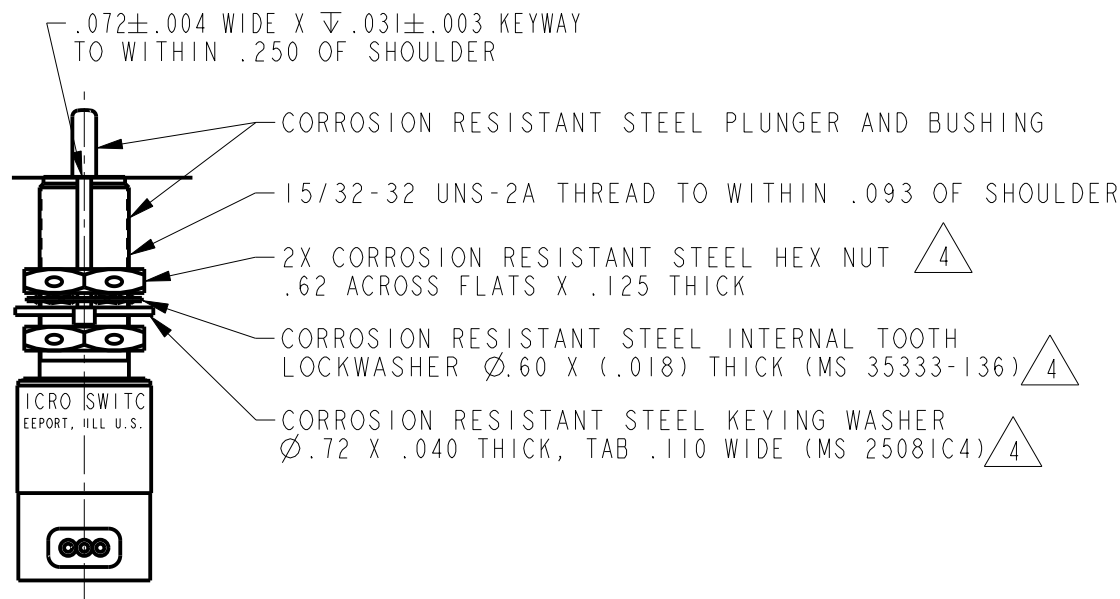


REV	DOCUMENT	CHANGED BY	CHECK
21	0006861	AS 02AUG04	AK

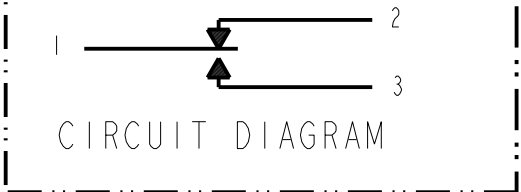

- NOTES
- 1 - CORROSION RESISTANT STEEL ENCLOSURE
 - 2 - SWITCH SEALED PER MIL-PRF-8805 SYMBOL 4
 - 3 - CIRCUIT DIAGRAM, CATALOG LISTING, DATE CODE, FED MFG CODE
AND FAA-PMA ARE SHOWN ON LABEL
 - 4 - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-PRF-8805
 - 5 - 3X Ø.047 HOLE FOR WIRE LOCKING
 - 6 - FOR MANUFACTURING DETAIL SEE
ASSEMBLY DRAWING 602EN601-6 FOR FAA-PMA

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± 0.400 ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± 0.0005 ANGLES X ± 3		DRAWN	TSM	11JAN00	Honeywell			
OPERATING FORCE ----- 2-4 LB		CONTACT ARRANGEMENT S P D T				CHECK	SAV	11JAN00				
FULL OVERTRAVEL FORCE --- 15 LB MAX				LOAD	28 VDC		TITLE SWITCH-ENCLOSED					
RELEASE FORCE ----- 1 LB MIN		SEA LEVEL	50,000 FT		SIZE TYPE DRAWING NAME REV							
PRETRAVEL ----- .015±.010		RES	7	7					B I 602EN601-6 21			
DIFFERENTIAL TRAVEL ----- .020 MAX		IND	4	2.5	SCALE FULL WEIGHT 4.3 OZ MAX SHEET 1 OF 1							
OVERTRAVEL ----- .250 MIN		MOTOR	4						Pro/ENGINEER 2D			
		LAMP			THIRD ANGLE PROJECTION 							