

MICRO SWITCH
a Honeywell Division


FED.MFG.CODE 91929

SWITCH - BASIC

CATALOG LISTING

BM-1RW84225551051-A2

WHEN SEARCHING FOR THIS CATALOG LISTING WITHIN HONEYWELL'S INTERNAL SAP SYSTEM, THE LISTING MUST BE ENTERED WITHOUT DASHES (BM1RW84225551051A2) DUE TO CHARACTER LIMITATIONS IMPOSED BY THE SYSTEM.

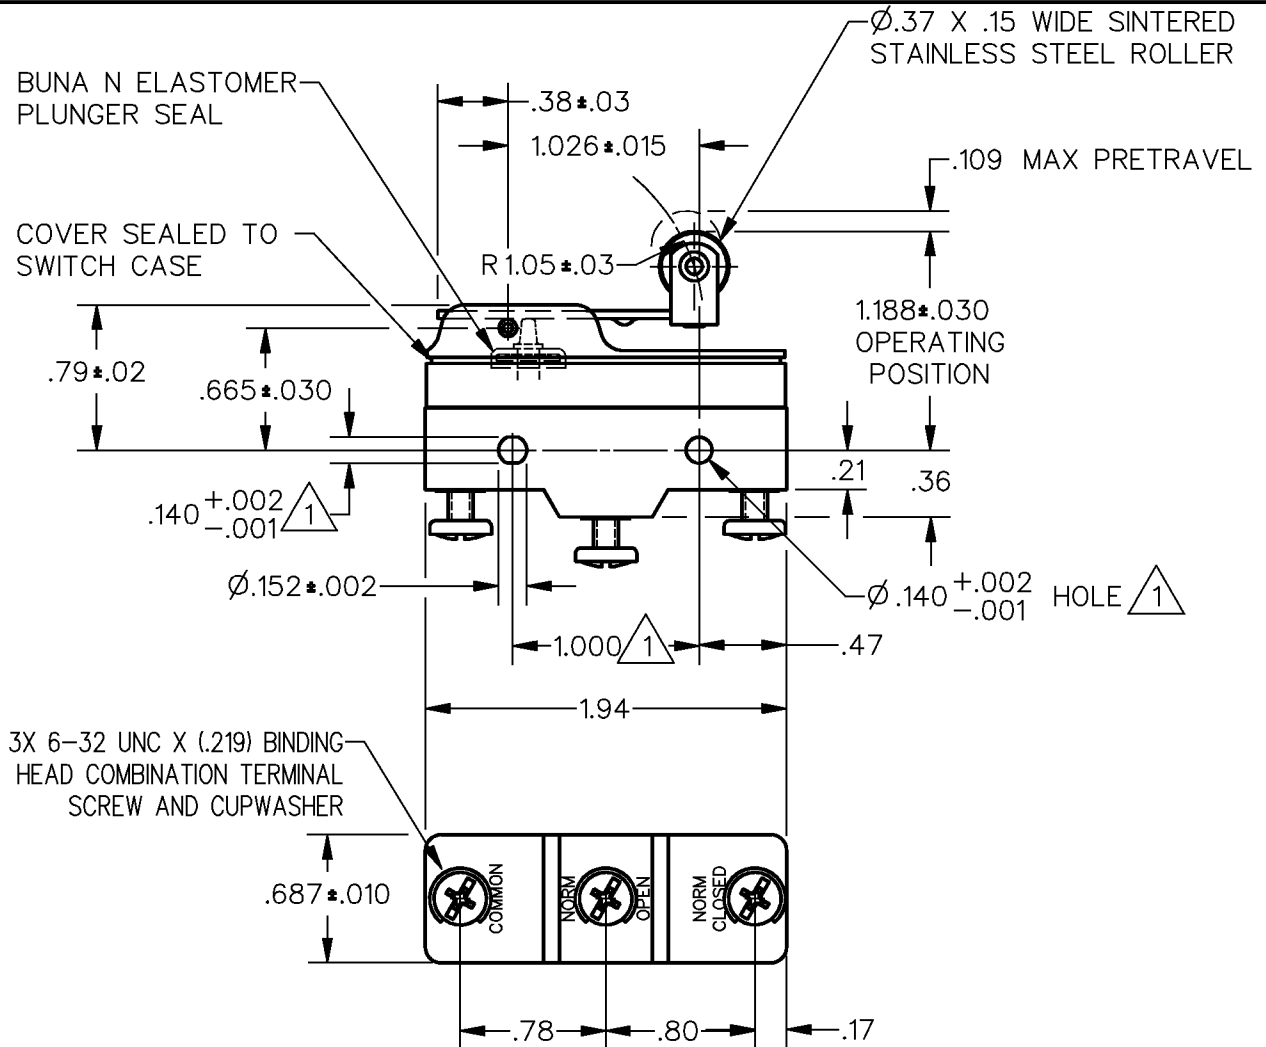


NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø.139 MAX ON 1.000 ± .002 CENTERS
- 2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE - - - - 2 OZ MAX
DIFFERENTIAL FORCE
RELEASE FORCE - - - - 1/4 OZ MIN
PRETRAVEL
DIFFERENTIAL TRAVEL - - .001 - .013
OVERTRAVEL - - - - -.094 MIN
FREE POSITION

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L161 22A 125, 250 OR 480 VAC
1/2HP 125 VAC, 1HP 250 VAC

L288
L315
L318



22A 250V ~ T85 5E4

SCALE NONE DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT .076 LB

CATALOG LISTING
BM-1RW84225551051-A2
PAGE 1 OF 1

ISSUE
6

REVISIONS

A	CO	73287-1	G R T	23 NOV 93
B	CO	75204-E	L J F	1 FEB 94
C	CO	93169	T S M	11 JUN 98
D	JA	0035411	MBH	09DEC08
E	JA	0046794	MBH	09DEC08

MBH

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08