


## ACE-A622A

220W 1U Type ATX Power Supply



## Dimensions (Unit: mm)

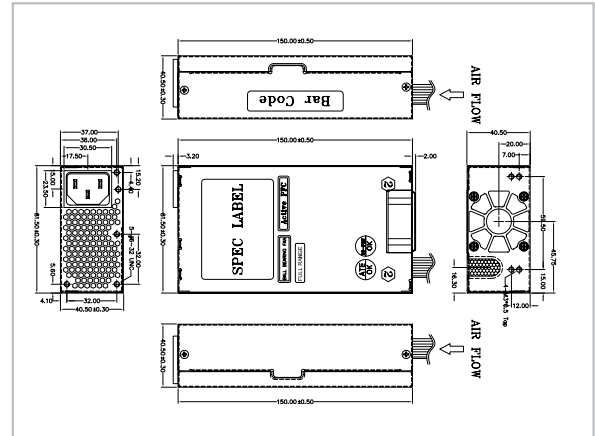

## Specifications

| Input Type       | 90~264 VAC Full Range                         |                      |                    |                    |                     |                     |
|------------------|-----------------------------------------------|----------------------|--------------------|--------------------|---------------------|---------------------|
| Output Voltage   | +3.3 V                                        | +5 V                 | +12 V              | +12 V 2            | -12 V               | +5 Vsb              |
|                  | 14 A<br>(0.5 A min.)                          | 16 A<br>(0.5 A min.) | 16 A<br>(1 A min.) | 10 A<br>(1 A min.) | 0.8 A<br>(0 A min.) | 2.5 A<br>(0 A min.) |
| Efficiency       | 80%                                           |                      |                    |                    |                     |                     |
| Temperature      | Operating: 0°C ~ 50°C, Storage: -20°C ~ 80°C  |                      |                    |                    |                     |                     |
| MTBF (hrs)       | 100,000 hr                                    |                      |                    |                    |                     |                     |
| Output Connector | 20-pin ATX, 4-pin 12 V, three HDD and one FDD |                      |                    |                    |                     |                     |
| Dimensions       | 150 x 81.5 x 40.5 (mm)                        |                      |                    |                    |                     |                     |

## Ordering Information

| Part No.         | Description                                                     |
|------------------|-----------------------------------------------------------------|
| ACE-A622A-RS-R11 | 220W AC-DC 1U flex ATX Power Supply, with PFC/ErP, meet 80 PLUS |

## ACE-A618A


180W 1U Type ATX Power Supply



## Specifications

| Input Type       | 90~264 VAC Full Range                               |                      |                      |                     |                     |
|------------------|-----------------------------------------------------|----------------------|----------------------|---------------------|---------------------|
| Output Voltage   | +3.3 V                                              | +5 V                 | +12 V                | -12 V               | +5 Vsb              |
|                  | 14 A<br>(0.3 A min.)                                | 16 A<br>(0.3 A min.) | 14 A<br>(1.5 A min.) | 0.5 A<br>(0 A min.) | 2.0 A<br>(0 A min.) |
| Efficiency       | 68%                                                 |                      |                      |                     |                     |
| Temperature      | Operating: 0°C ~ 50°C, Storage: -20°C ~ 80°C        |                      |                      |                     |                     |
| MTBF (hrs)       | 100,000 hr                                          |                      |                      |                     |                     |
| Output Connector | 1 x 20-pin ATX, 1 x 4-pin 12V CPU, 3 x HDD, 1 x FDD |                      |                      |                     |                     |
| Dimensions       | 150 x 81.5 x 40.5 (mm)                              |                      |                      |                     |                     |

## Dimensions (Unit: mm)

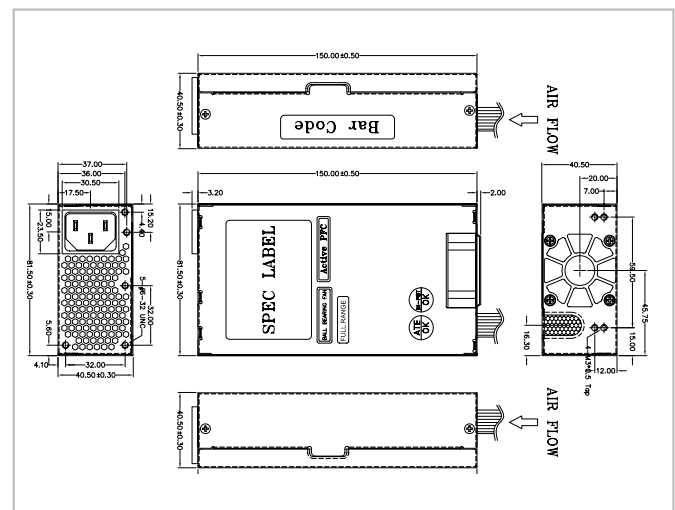

## Ordering Information

| Part No.         | Description                                      |
|------------------|--------------------------------------------------|
| ACE-A618A-RS-R11 | 180WAC-DC 1U flex ATX Power Supply, with PFC/ErP |