



135LC6900K5PM8

Conduction Cooled (High Density Resonant)

Parts are RoHS compliant

Parts are RoHS compliant

ELECTRICAL SPECIFICATIONS

Capacitance: 1.33 μ F

AC Current: 950 A

ESR: 0.3 milliohms at 100 kHz and 20°C

Self Inductance: 5 Nanohenries maximum

Tolerance: -10 %, +10 %

Temperature Range: -40°C to +85°C

Maximum Core Temperature: 85°C

Resonant Frequency: 89-180 kHz

Maximum power (KVAR): 600

VAC: 900 Volts AC


PHYSICAL DIMENSIONS

Length (L): 100 mm, 1 mm

Height (H): 100 mm, +/- 1 mm

Thickness (B): 54 mm, +/-0.5 mm

LEAD STYLE: 5PM8

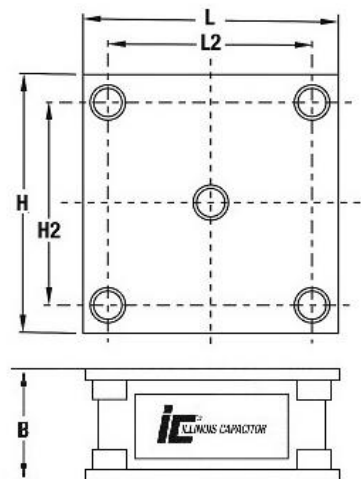

L	H	B	L2	H2
100 $\pm$ 1	100 $\pm$ 1	54 $\pm$ 0.5	36 $\pm$ 0.5	36 $\pm$ 0.5
Mounting holes: M8 tap				
Tightening torque: 20Nm MAX				



2400 East Devon Avenue Suite 292 Des Plaines, IL 60018 (847) 675-1760 FAX (847) 673-2850

Illinois Capacitor (HK) Ltd., Tel: 85227930931, Fax: 85227930731, www.illcap.com.hk

© Copyright 2020 Illinois Capacitor. An affiliate of Cornell Dubilier, All Rights Reserved