

SEARCH OUR
PRODUCTS

aluminum
electrolytic &
organic
semiconductor

film

power film

tantalum
ceramic

TECH TOOLS



NEW PRODUCTS

Aluminum Electrolytic Capacitors

+85°C Standard Radial Lead Aluminum Electrolytic Capacitors

Part Number: 227CKS050M

[General Specifications \(PDF\)](#)

[Special Order Options](#)

[CKR_CKS document \(PDF\)](#)



Electrical Specifications

Capacitance: 220.0 μ F

Tolerance: -20 %, +20 %

Dissipation Factor: 0.1 at 120 Hz

ESR: 0.754 Ohms at 20° C and 120 Hz

Impedance:

--

--

Impedance Ratios:

2.0 at -25°C/20°C

3.0 at -40°C/20°C

Load Life:

2000 Hours at 85°C with 100% of rated voltage and
with 0% of rated ripple current

Temperature Range: -40°C to +85°C

WVDC: 50 volts DC

SVDC: 63. volts DC

Leakage Current:

330.0 μ A after 1 Minute

Ripple Current:

430.0 mA at 120 Hz and 85°C

Physical Specifications


Diameter (D): 10.0 mm + 0.5 mm

Length (L): 12.5 mm + 1.5 mm

Lead Wire Diameter (d): 0.6 mm + 0.05 mm

Lead Spacing: 5.0 mm +/- 0.5 mm

Lead Length: 15 mm

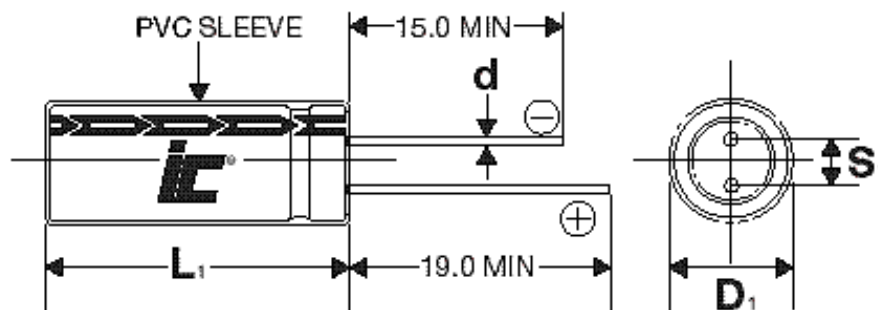

Add To Sample Cart
(You can always remove it later)