

SEARCH OUR
PRODUCTS

aluminum
electrolytic &
organic
semiconductor

film

power film

tantalum
ceramic

TECH TOOLS



NEW PRODUCTS

Aluminum Electrolytic Capacitors

+85°C Reduced Size Snap-Mount Aluminum Electrolytic Capacitors

Part Number: 228LBB063M2BD

[General Specifications \(PDF\)](#)

[Special Order Options](#)

[LBB document \(PDF\)](#)



Electrical Specifications

Capacitance: 2,200.0 μ F
Tolerance: -20 %, +20 %
Dissipation Factor: 0.15 at 120 Hz
ESR: 113.04 milliOhms at 20° C and 120 Hz
Impedance:

--
--

Impedance Ratios:

2.0 at -25°C/20°C

6.0 at -40°C/20°C

Load Life:

3000 Hours at 85°C with 100% of rated voltage and
with 100% of rated ripple current

Temperature Range: -40°C to +85°C

WVDC: 63 volts DC

SVDC: 79. volts DC

Leakage Current:


2,772.0 μ A after 5 Minutes

Ripple Current:

2.31 A at 120 Hz and 85°C

Physical Specifications

Diameter (D): 22.0 mm + 1.0 mm
Length (L): 30.0 mm + 2.0 mm
Lead Wire Diameter (d): 1.5 mm + 0.5 mm
Lead Spacing: 10.0 mm +/- 1.0 mm
Lead Length: 4 mm

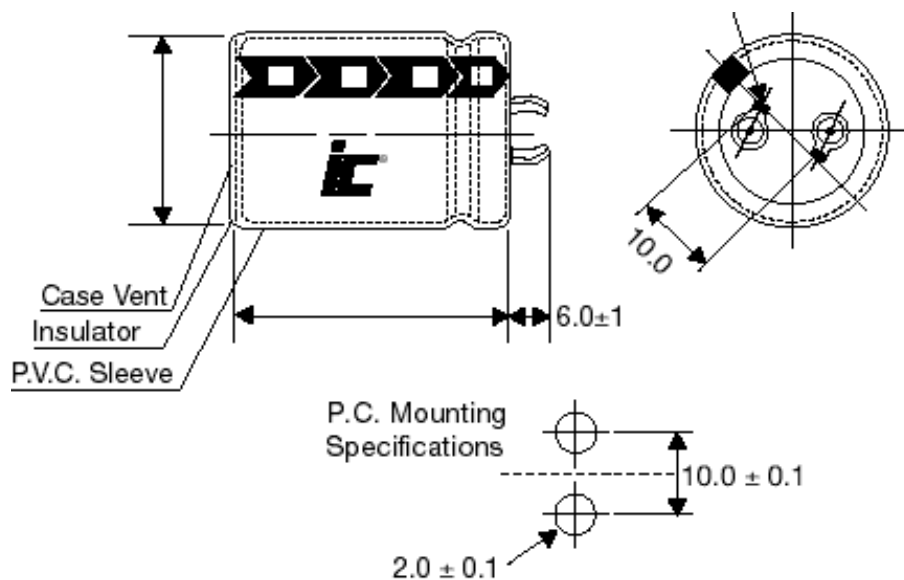

Add To Sample Cart
(You can always remove it later)