



**128K x 36, 256K x 18**  
**3.3V Synchronous SRAMs**  
**3.3V I/O, Pipelined Outputs**  
**Burst Counter, Single Cycle Deselect**

**IDT71V35761**  
**IDT71V35781**

## Features

- ♦ 128K x 36, 256K x 18 memory configurations
- ♦ Supports high system speed:
  - Commercial:
    - 200MHz 3.1ns clock access time
  - Commercial and Industrial:
    - 183MHz 3.3ns clock access time
    - 166MHz 3.5ns clock access time
- ♦  $\overline{\text{LBO}}$  input selects interleaved or linear burst mode
- ♦ Self-timed write cycle with global write control ( $\overline{\text{GW}}$ ), byte write enable ( $\overline{\text{BWE}}$ ), and byte writes ( $\overline{\text{BWx}}$ )
- ♦ 3.3V core power supply
- ♦ Power down controlled by ZZ input
- ♦ 3.3V I/O
- ♦ Packaged in a JEDEC Standard 100-pin plastic thin quad flatpack (TQFP), 119 ball grid array (BGA) and 165 fine pitch ball grid array

## Description

The IDT71V35761/781 are high-speed SRAMs organized as 128K x 36/256K x 18. The IDT71V35761/781 SRAMs contain write, data, address and control registers. Internal logic allows the SRAM to generate a self-timed write based upon a decision which can be left until the end of the write cycle.

The burst mode feature offers the highest level of performance to the system designer, as the IDT71V35761/81 can provide four cycles of data for a single address presented to the SRAM. An internal burst address counter accepts the first cycle address from the processor, initiating the access sequence. The first cycle of output data will be pipelined for one cycle before it is available on the next rising clock edge. If burst mode operation is selected ( $\overline{\text{ADV}}=\text{LOW}$ ), the subsequent three cycles of output data will be available to the user on the next three rising clock edges. The order of these three addresses are defined by the internal burst counter and the  $\overline{\text{LBO}}$  input pin.

The IDT71V35761/781 SRAMs utilize IDT's latest high-performance CMOS process and are packaged in a JEDEC standard 14mm x 20mm 100-pin thin plastic quad flatpack (TQFP) as well as a 119 ball grid array (BGA) and 165 fine pitch ball grid array.

## Pin Description Summary

|                                                                                                                 |                                   |        |              |
|-----------------------------------------------------------------------------------------------------------------|-----------------------------------|--------|--------------|
| A0-A17                                                                                                          | Address Inputs                    | Input  | Synchronous  |
| $\overline{\text{CE}}$                                                                                          | Chip Enable                       | Input  | Synchronous  |
| CS0, $\overline{\text{CS}}_1$                                                                                   | Chip Selects                      | Input  | Synchronous  |
| $\overline{\text{OE}}$                                                                                          | Output Enable                     | Input  | Asynchronous |
| $\overline{\text{GW}}$                                                                                          | Global Write Enable               | Input  | Synchronous  |
| $\overline{\text{BWE}}$                                                                                         | Byte Write Enable                 | Input  | Synchronous  |
| $\overline{\text{BW}}_1$ , $\overline{\text{BW}}_2$ , $\overline{\text{BW}}_3$ , $\overline{\text{BW}}_4^{(1)}$ | Individual Byte Write Selects     | Input  | Synchronous  |
| CLK                                                                                                             | Clock                             | Input  | N/A          |
| $\overline{\text{ADV}}$                                                                                         | Burst Address Advance             | Input  | Synchronous  |
| $\overline{\text{ADSC}}$                                                                                        | Address Status (Cache Controller) | Input  | Synchronous  |
| $\overline{\text{ADSP}}$                                                                                        | Address Status (Processor)        | Input  | Synchronous  |
| $\overline{\text{LBO}}$                                                                                         | Linear / Interleaved Burst Order  | Input  | DC           |
| ZZ                                                                                                              | Sleep Mode                        | Input  | Asynchronous |
| I/O0-I/O31, I/OP1-I/OP4                                                                                         | Data Input / Output               | I/O    | Synchronous  |
| VDD, VDDQ                                                                                                       | Core Power, I/O Power             | Supply | N/A          |
| VSS                                                                                                             | Ground                            | Supply | N/A          |

5301 tbl 01

### NOTE:

1.  $\overline{\text{BW}}_3$  and  $\overline{\text{BW}}_4$  are not applicable for the IDT71V35781.

**APRIL 2003**

## Pin Definitions<sup>(1)</sup>


| Symbol                      | Pin Function                      | I/O | Active | Description                                                                                                                                                                                                                                                                                                                                                                |
|-----------------------------|-----------------------------------|-----|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A0-A17                      | Address Inputs                    | I   | N/A    | Synchronous Address inputs. The address register is triggered by a combination of the rising edge of CLK and $\overline{\text{ADSC}}$ Low or $\overline{\text{ADSP}}$ Low and $\overline{\text{CE}}$ Low.                                                                                                                                                                  |
| $\overline{\text{ADSC}}$    | Address Status (Cache Controller) | I   | LOW    | Synchronous Address Status from Cache Controller. $\overline{\text{ADSC}}$ is an active LOW input that is used to load the address registers with new addresses.                                                                                                                                                                                                           |
| $\overline{\text{ADSP}}$    | Address Status (Processor)        | I   | LOW    | Synchronous Address Status from Processor. $\overline{\text{ADSP}}$ is an active LOW input that is used to load the address registers with new addresses. $\overline{\text{ADSP}}$ is gated by $\overline{\text{CE}}$ .                                                                                                                                                    |
| $\overline{\text{ADV}}$     | Burst Address Advance             | I   | LOW    | Synchronous Address Advance. $\overline{\text{ADV}}$ is an active LOW input that is used to advance the internal burst counter, controlling burst access after the initial address is loaded. When the input is HIGH the burst counter is not incremented; that is, there is no address advance.                                                                           |
| $\overline{\text{BWE}}$     | Byte Write Enable                 | I   | LOW    | Synchronous byte write enable gates the byte write inputs $\overline{\text{BW1-BW4}}$ . If $\overline{\text{BWE}}$ is LOW at the rising edge of CLK then $\overline{\text{BWx}}$ inputs are passed to the next stage in the circuit. If $\overline{\text{BWE}}$ is HIGH then the byte write inputs are blocked and only $\overline{\text{GW}}$ can initiate a write cycle. |
| $\overline{\text{BW1-BW4}}$ | Individual Byte Write Enables     | I   | LOW    | Synchronous byte write enables. $\overline{\text{BW1}}$ controls I/O0-7, I/OP1, $\overline{\text{BW2}}$ controls I/O8-15, I/OP2, etc. Any active byte write causes all outputs to be disabled.                                                                                                                                                                             |
| $\overline{\text{CE}}$      | Chip Enable                       | I   | LOW    | Synchronous chip enable. $\overline{\text{CE}}$ is used with $\text{CS0}$ and $\overline{\text{CS1}}$ to enable the IDT71V35761/781. $\overline{\text{CE}}$ also gates $\overline{\text{ADSP}}$ .                                                                                                                                                                          |
| CLK                         | Clock                             | I   | N/A    | This is the clock input. All timing references for the device are made with respect to this input.                                                                                                                                                                                                                                                                         |
| $\text{CS0}$                | Chip Select 0                     | I   | HIGH   | Synchronous active HIGH chip select. $\text{CS0}$ is used with $\overline{\text{CE}}$ and $\overline{\text{CS1}}$ to enable the chip.                                                                                                                                                                                                                                      |
| $\overline{\text{CS1}}$     | Chip Select 1                     | I   | LOW    | Synchronous active LOW chip select. $\overline{\text{CS1}}$ is used with $\overline{\text{CE}}$ and $\text{CS0}$ to enable the chip.                                                                                                                                                                                                                                       |
| $\overline{\text{GW}}$      | Global Write Enable               | I   | LOW    | Synchronous global write enable. This input will write all four 9-bit data bytes when LOW on the rising edge of CLK. $\overline{\text{GW}}$ supersedes individual byte write enables.                                                                                                                                                                                      |
| I/O0-I/O31<br>I/OP1-I/OP4   | Data Input/Output                 | I/O | N/A    | Synchronous data input/output (I/O) pins. Both the data input path and data output path are registered and triggered by the rising edge of CLK.                                                                                                                                                                                                                            |
| $\overline{\text{LBO}}$     | Linear Burst Order                | I   | LOW    | Asynchronous burst order selection input. When $\overline{\text{LBO}}$ is HIGH, the interleaved burst sequence is selected. When $\overline{\text{LBO}}$ is LOW the Linear burst sequence is selected. $\overline{\text{LBO}}$ is a static input and must not change state while the device is operating.                                                                  |
| $\overline{\text{OE}}$      | Output Enable                     | I   | LOW    | Asynchronous output enable. When $\overline{\text{OE}}$ is LOW the data output drivers are enabled on the I/O pins if the chip is also selected. When $\overline{\text{OE}}$ is HIGH the I/O pins are in a high-impedance state.                                                                                                                                           |
| $\text{VDD}$                | Power Supply                      | N/A | N/A    | 3.3V core power supply.                                                                                                                                                                                                                                                                                                                                                    |
| $\text{VDDQ}$               | Power Supply                      | N/A | N/A    | 3.3V I/O Supply.                                                                                                                                                                                                                                                                                                                                                           |
| $\text{VSS}$                | Ground                            | N/A | N/A    | Ground.                                                                                                                                                                                                                                                                                                                                                                    |
| NC                          | No Connect                        | N/A | N/A    | NC pins are not electrically connected to the device.                                                                                                                                                                                                                                                                                                                      |
| ZZ                          | Sleep Mode                        | I   | HIGH   | Asynchronous sleep mode input. ZZ HIGH will gate the CLK internally and power down the IDT71V35761/781 to its lowest power consumption level. Data retention is guaranteed in Sleep Mode.                                                                                                                                                                                  |

5301tbl 02

### NOTE:

1. All synchronous inputs must meet specified setup and hold times with respect to CLK.

## Functional Block Diagram

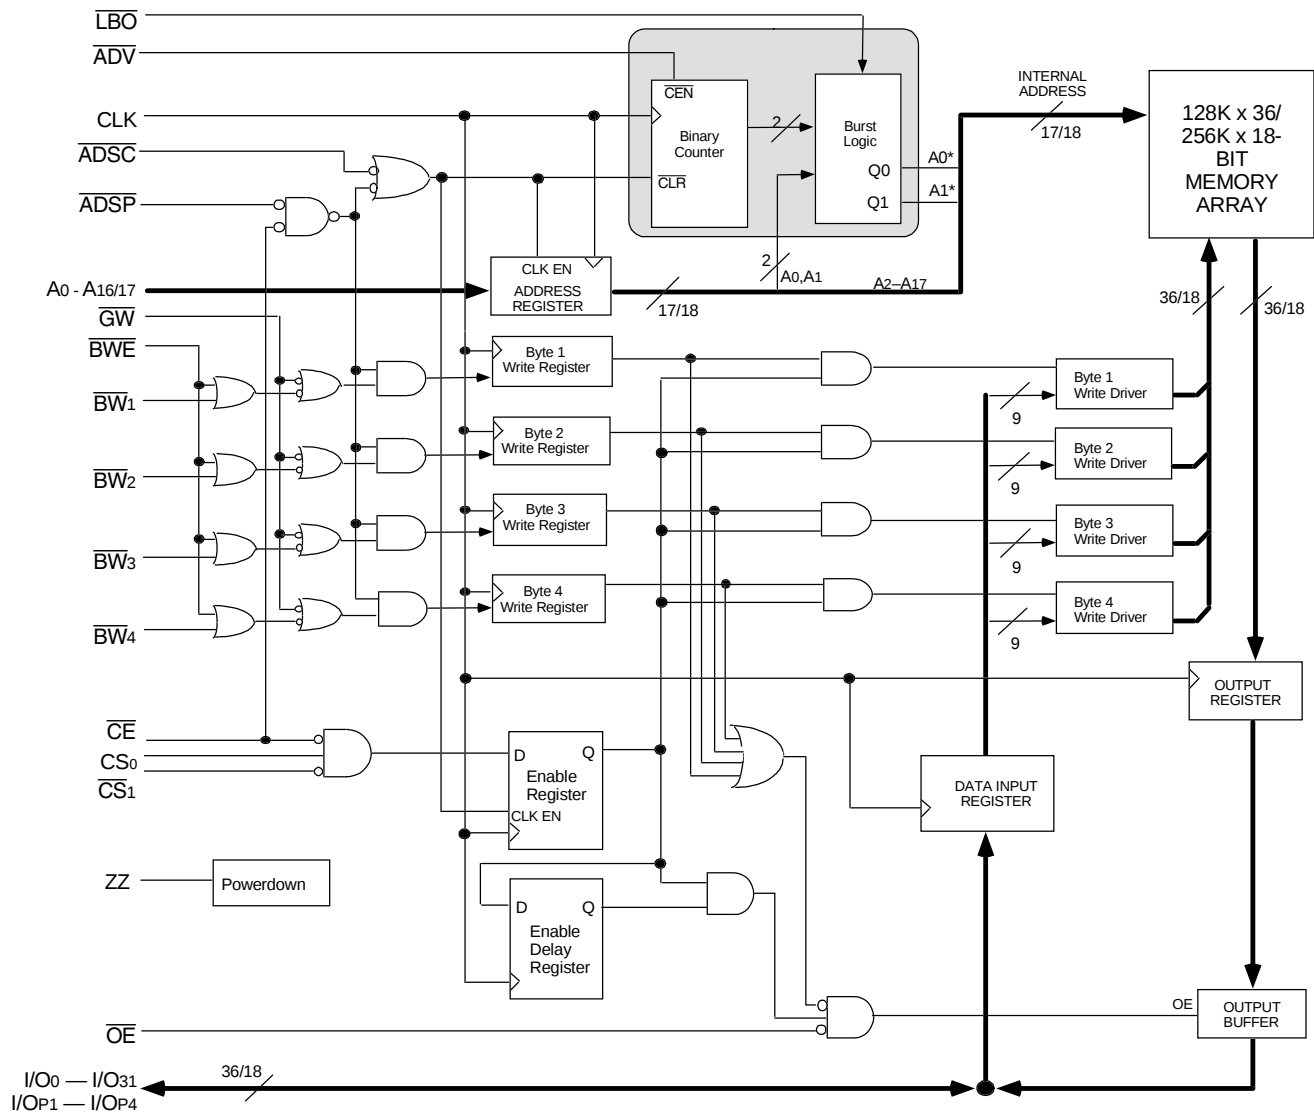

5301 drw 01

## Absolute Maximum Ratings<sup>(1)</sup>

| Symbol                             | Rating                               | Commercial & Industrial       | Unit |
|------------------------------------|--------------------------------------|-------------------------------|------|
| V <sub>TERM</sub> <sup>(2)</sup>   | Terminal Voltage with Respect to GND | -0.5 to +4.6                  | V    |
| V <sub>TERM</sub> <sup>(3,6)</sup> | Terminal Voltage with Respect to GND | -0.5 to V <sub>DD</sub>       | V    |
| V <sub>TERM</sub> <sup>(4,6)</sup> | Terminal Voltage with Respect to GND | -0.5 to V <sub>DD</sub> +0.5  | V    |
| V <sub>TERM</sub> <sup>(5,6)</sup> | Terminal Voltage with Respect to GND | -0.5 to V <sub>DDQ</sub> +0.5 | V    |
| T <sub>A</sub> <sup>(7)</sup>      | Commercial Operating Temperature     | -0 to +70                     | °C   |
|                                    | Industrial Operating Temperature     | -40 to +85                    | °C   |
| T <sub>BIAS</sub>                  | Temperature Under Bias               | -55 to +125                   | °C   |
| T <sub>STG</sub>                   | Storage Temperature                  | -55 to +125                   | °C   |
| P <sub>T</sub>                     | Power Dissipation                    | 2.0                           | W    |
| I <sub>OUT</sub>                   | DC Output Current                    | 50                            | mA   |

5301 tbl 03

### NOTES:

- Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.
- V<sub>DD</sub> terminals only.
- V<sub>DDQ</sub> terminals only.
- Input terminals only.
- I/O terminals only.
- This is a steady-state DC parameter that applies after the power supplies have ramped up. Power supply sequencing is not necessary; however, the voltage on any input or I/O pin cannot exceed V<sub>DDQ</sub> during power supply ramp up.
- T<sub>A</sub> is the "instant on" case temperature.

## Recommended Operating Temperature and Supply Voltage

| Grade      | Temperature <sup>(1)</sup> | V <sub>SS</sub> | V <sub>DD</sub> | V <sub>DDQ</sub> |
|------------|----------------------------|-----------------|-----------------|------------------|
| Commercial | 0°C to +70°C               | 0V              | 3.3V±5%         | 3.3V±5%          |
| Industrial | -40°C to +85°C             | 0V              | 3.3V±5%         | 3.3V±5%          |

5301 tbl 04

### NOTES:

- T<sub>A</sub> is the "instant on" case temperature.

## Recommended DC Operating Conditions

| Symbol           | Parameter                   | Min.                | Typ. | Max.                                 | Unit |
|------------------|-----------------------------|---------------------|------|--------------------------------------|------|
| V <sub>DD</sub>  | Core Supply Voltage         | 3.135               | 3.3  | 3.465                                | V    |
| V <sub>DDQ</sub> | I/O Supply Voltage          | 3.135               | 3.3  | 3.465                                | V    |
| V <sub>SS</sub>  | Supply Voltage              | 0                   | 0    | 0                                    | V    |
| V <sub>IH</sub>  | Input High Voltage - Inputs | 2.0                 | —    | V <sub>DD</sub> +0.3                 | V    |
| V <sub>IH</sub>  | Input High Voltage - I/O    | 2.0                 | —    | V <sub>DDQ</sub> +0.3 <sup>(1)</sup> | V    |
| V <sub>IL</sub>  | Input Low Voltage           | -0.3 <sup>(2)</sup> | —    | 0.8                                  | V    |

5301 tbl 06

### NOTES:

- V<sub>IH</sub> (max) = V<sub>DDQ</sub> + 1.0V for pulse width less than t<sub>cy</sub>/2, once per cycle.
- V<sub>IL</sub> (min) = -1.0V for pulse width less than t<sub>cy</sub>/2, once per cycle.

## 100 Pin TQFP Capacitance

(T<sub>A</sub> = +25°C, f = 1.0MHz)

| Symbol           | Parameter <sup>(1)</sup> | Conditions             | Max. | Unit |
|------------------|--------------------------|------------------------|------|------|
| C <sub>IN</sub>  | Input Capacitance        | V <sub>IN</sub> = 3dV  | 5    | pF   |
| C <sub>I/O</sub> | I/O Capacitance          | V <sub>OUT</sub> = 3dV | 7    | pF   |

5301 tbl 07

## 119 BGA Capacitance

(T<sub>A</sub> = +25°C, f = 1.0MHz)

| Symbol           | Parameter <sup>(1)</sup> | Conditions             | Max. | Unit |
|------------------|--------------------------|------------------------|------|------|
| C <sub>IN</sub>  | Input Capacitance        | V <sub>IN</sub> = 3dV  | 7    | pF   |
| C <sub>I/O</sub> | I/O Capacitance          | V <sub>OUT</sub> = 3dV | 7    | pF   |

5301 tbl 07a

## 165 fBGA Capacitance

(T<sub>A</sub> = +25°C, f = 1.0MHz)


| Symbol           | Parameter <sup>(1)</sup> | Conditions             | Max. | Unit |
|------------------|--------------------------|------------------------|------|------|
| C <sub>IN</sub>  | Input Capacitance        | V <sub>IN</sub> = 3dV  | 7    | pF   |
| C <sub>I/O</sub> | I/O Capacitance          | V <sub>OUT</sub> = 3dV | 7    | pF   |

5301 tbl 07b

### NOTE:

- This parameter is guaranteed by device characterization, but not production tested.

## Pin Configuration – 128K x 36

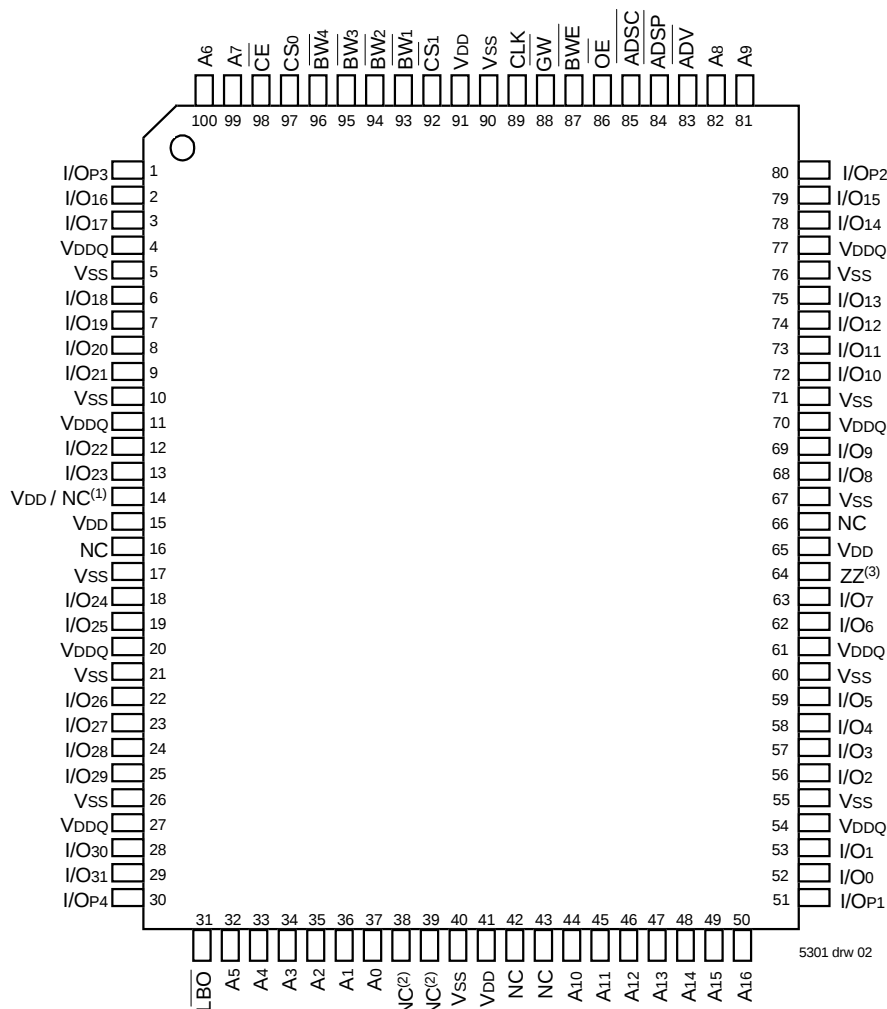


## 100 TQFP Top View

### NOTES:

- Pin 14 can either be directly connected to VDD, or connected to an input voltage  $\geq V_{IH}$ , or left unconnected.
- Pins 38 and 39 can be either NC or connected to VSS.
- Pin 64 can be left unconnected and the device will always remain in active mode.

## Pin Configuration – 256K x 18

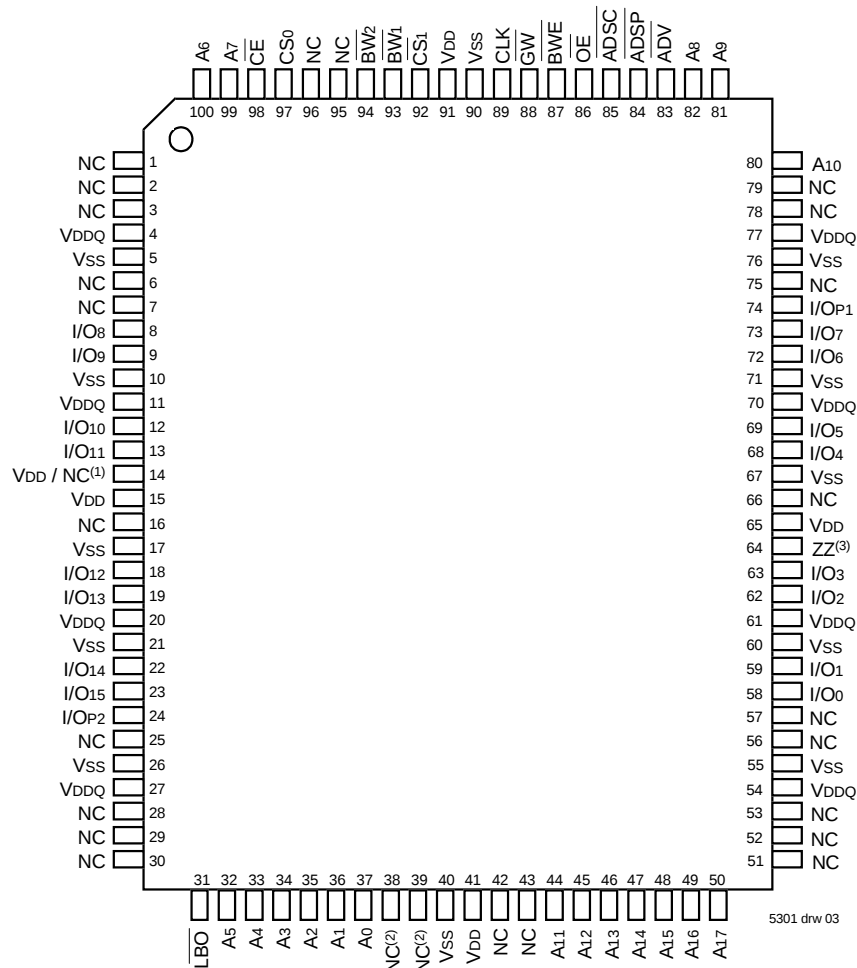

### 100 TQFP Top View

#### NOTES:

1. Pin 14 can either be directly connected to VDD, or connected to an input voltage  $\geq V_{IH}$ , or left unconnected.
2. Pins 38 and 39 can be either NC or connected to VSS.
3. Pin 64 can be left unconnected and the device will always remain in active mode.

## Pin Configuration – 128K x 36, 119 BGA

|   | 1     | 2                  | 3                  | 4                    | 5                       | 6                  | 7                 |
|---|-------|--------------------|--------------------|----------------------|-------------------------|--------------------|-------------------|
| A | VDDQ  | A6                 | A4                 | ADSP                 | A8                      | A16                | VDDQ              |
| B | NC    | CS <sub>0</sub>    | A3                 | ADSC                 | A9                      | CS <sub>1</sub>    | NC                |
| C | NC    | A7                 | A2                 | VDD                  | A12                     | A15                | NC                |
| D | I/O16 | I/OP3              | VSS                | NC                   | VSS                     | I/OP2              | I/O15             |
| E | I/O17 | I/O18              | VSS                | CE                   | VSS                     | I/O13              | I/O14             |
| F | VDDQ  | I/O19              | VSS                | OE                   | VSS                     | I/O12              | VDDQ              |
| G | I/O20 | I/O21              | BW <sub>3</sub>    | ADV                  | BW <sub>2</sub>         | I/O11              | I/O10             |
| H | I/O22 | I/O23              | VSS                | GW                   | VSS                     | I/O9               | I/O8              |
| J | VDDQ  | VDD                | NC                 | VDD                  | NC                      | VDD                | VDDQ              |
| K | I/O24 | I/O26              | VSS                | CLK                  | VSS                     | I/O6               | I/O7              |
| L | I/O25 | I/O27              | BW <sub>4</sub>    | NC <sup>(2)</sup>    | BW <sub>1</sub>         | I/O4               | I/O5              |
| M | VDDQ  | I/O28              | VSS                | BWE                  | VSS                     | I/O3               | VDDQ              |
| N | I/O29 | I/O30              | VSS                | A1                   | VSS                     | I/O2               | I/O1              |
| P | I/O31 | I/OP4              | VSS                | A0                   | VSS                     | I/O0               | I/OP1             |
| R | NC    | A5                 | LBO                | VDD                  | VDD / NC <sup>(1)</sup> | A13                | NC                |
| T | NC    | NC                 | A10                | A11                  | A14                     | NC                 | ZZ <sup>(3)</sup> |
| U | VDDQ  | DNU <sup>(4)</sup> | DNU <sup>(4)</sup> | DNU <sup>(2,4)</sup> | DNU <sup>(4)</sup>      | DNU <sup>(4)</sup> | VDDQ              |

5301 drw 04

### Top View

## Pin Configuration – 256K x 18, 119 BGA

|   | 1     | 2                  | 3                  | 4                    | 5                       | 6                  | 7                 |
|---|-------|--------------------|--------------------|----------------------|-------------------------|--------------------|-------------------|
| A | VDDQ  | A6                 | A4                 | ADSP                 | A8                      | A16                | VDDQ              |
| B | NC    | CS <sub>0</sub>    | A3                 | ADSC                 | A9                      | CS <sub>1</sub>    | NC                |
| C | NC    | A7                 | A2                 | VDD                  | A13                     | A17                | NC                |
| D | I/O8  | NC                 | VSS                | NC                   | VSS                     | I/O7               | NC                |
| E | NC    | I/O9               | VSS                | CE                   | VSS                     | NC                 | I/O6              |
| F | VDDQ  | NC                 | VSS                | OE                   | VSS                     | I/O5               | VDDQ              |
| G | NC    | I/O10              | BW <sub>2</sub>    | ADV                  | VSS                     | NC                 | I/O4              |
| H | I/O11 | NC                 | VSS                | GW                   | VSS                     | I/O3               | NC                |
| J | VDDQ  | VDD                | NC                 | VDD                  | NC                      | VDD                | VDDQ              |
| K | NC    | I/O12              | VSS                | CLK                  | VSS                     | NC                 | I/O2              |
| L | I/O13 | NC                 | VSS                | NC <sup>(2)</sup>    | BW <sub>1</sub>         | I/O1               | NC                |
| M | VDDQ  | I/O14              | VSS                | BWE                  | VSS                     | NC                 | VDDQ              |
| N | I/O15 | NC                 | VSS                | A1                   | VSS                     | I/O0               | NC                |
| P | NC    | I/OP2              | VSS                | A0                   | VSS                     | NC                 | I/OP1             |
| R | NC    | A5                 | LBO                | VDD                  | VDD / NC <sup>(1)</sup> | A12                | NC                |
| T | NC    | A10                | A15                | NC                   | A14                     | A11                | ZZ <sup>(3)</sup> |
| U | VDDQ  | DNU <sup>(4)</sup> | DNU <sup>(4)</sup> | DNU <sup>(2,4)</sup> | DNU <sup>(4)</sup>      | DNU <sup>(4)</sup> | VDDQ              |

5301 drw 05

### Top View

#### NOTES:

1. R5 can either be directly connected to VDD, or connected to an input voltage  $\geq V_{IH}$ , or left unconnected.
2. L4 and U4 can be either NC or connected to VSS.
3. T7 can be left unconnected and the device will always remain in active mode.
4. DNU = Do not use; Pins U2, U3, U4, U5 and U6 are reserved for respective JTAG pins: TMS, TDI, TCK, TDO and  $\overline{TRST}$  on future revisions. Within this current version, these pins are not connected.

## Pin Configuration – 128K x 36, 165 fBGA

|   | 1                  | 2                 | 3                 | 4                 | 5                  | 6                 | 7                  | 8                 | 9                 | 10    | 11                |
|---|--------------------|-------------------|-------------------|-------------------|--------------------|-------------------|--------------------|-------------------|-------------------|-------|-------------------|
| A | NC <sup>(4)</sup>  | A7                | $\overline{CE}_1$ | $\overline{BW}_3$ | $\overline{BW}_2$  | $\overline{CS}_1$ | $\overline{BWE}$   | $\overline{ADSC}$ | $\overline{ADV}$  | A8    | NC                |
| B | NC                 | A6                | CS0               | $\overline{BW}_4$ | $\overline{BW}_1$  | CLK               | $\overline{GW}$    | $\overline{OE}$   | $\overline{ADSP}$ | A9    | NC <sup>(4)</sup> |
| C | I/OP3              | NC                | VDDQ              | VSS               | VSS                | VSS               | VSS                | VSS               | VDDQ              | NC    | I/OP2             |
| D | I/O17              | I/O16             | VDDQ              | VDD               | VSS                | VSS               | VSS                | VDD               | VDDQ              | I/O15 | I/O14             |
| E | I/O19              | I/O18             | VDDQ              | VDD               | VSS                | VSS               | VSS                | VDD               | VDDQ              | I/O13 | I/O12             |
| F | I/O21              | I/O20             | VDDQ              | VDD               | VSS                | VSS               | VSS                | VDD               | VDDQ              | I/O11 | I/O10             |
| G | I/O23              | I/O22             | VDDQ              | VDD               | VSS                | VSS               | VSS                | VDD               | VDDQ              | I/O9  | I/O8              |
| H | VDD <sup>(1)</sup> | NC <sup>(2)</sup> | NC                | VDD               | VSS                | VSS               | VSS                | VDD               | NC                | NC    | ZZ <sup>(3)</sup> |
| J | I/O25              | I/O24             | VDDQ              | VDD               | VSS                | VSS               | VSS                | VDD               | VDDQ              | I/O7  | I/O6              |
| K | I/O27              | I/O26             | VDDQ              | VDD               | VSS                | VSS               | VSS                | VDD               | VDDQ              | I/O5  | I/O4              |
| L | I/O29              | I/O28             | VDDQ              | VDD               | VSS                | VSS               | VSS                | VDD               | VDDQ              | I/O3  | I/O2              |
| M | I/O31              | I/O30             | VDDQ              | VDD               | VSS                | VSS               | VSS                | VDD               | VDDQ              | I/O1  | I/O0              |
| N | I/OP4              | NC                | VDDQ              | VSS               | DNU <sup>(5)</sup> | NC <sup>(4)</sup> | NC <sup>(2)</sup>  | VSS               | VDDQ              | NC    | I/OP1             |
| P | NC                 | NC <sup>(4)</sup> | A5                | A2                | DNU <sup>(5)</sup> | A1                | DNU <sup>(5)</sup> | A10               | A13               | A14   | NC <sup>(4)</sup> |
| R | $\overline{LBO}$   | NC <sup>(4)</sup> | A4                | A3                | DNU <sup>(5)</sup> | A0                | DNU <sup>(5)</sup> | A11               | A12               | A15   | A16               |

5301 tbl 17

## Pin Configuration – 256K x 18, 165 fBGA

|   | 1                  | 2                 | 3                 | 4                 | 5                  | 6                 | 7                  | 8                 | 9                 | 10   | 11                |
|---|--------------------|-------------------|-------------------|-------------------|--------------------|-------------------|--------------------|-------------------|-------------------|------|-------------------|
| A | NC <sup>(4)</sup>  | A7                | $\overline{CE}_1$ | $\overline{BW}_2$ | NC                 | $\overline{CS}_1$ | $\overline{BWE}$   | $\overline{ADSC}$ | $\overline{ADV}$  | A8   | A <sub>10</sub>   |
| B | NC                 | A6                | CS0               | NC                | $\overline{BW}_1$  | CLK               | $\overline{GW}$    | $\overline{OE}$   | $\overline{ADSP}$ | A9   | NC <sup>(4)</sup> |
| C | NC                 | NC                | VDDQ              | VSS               | VSS                | VSS               | VSS                | VSS               | VDDQ              | NC   | I/OP1             |
| D | NC                 | I/O8              | VDDQ              | VDD               | VSS                | VSS               | VSS                | VDD               | VDDQ              | NC   | I/O7              |
| E | NC                 | I/O9              | VDDQ              | VDD               | VSS                | VSS               | VSS                | VDD               | VDDQ              | NC   | I/O6              |
| F | NC                 | I/O10             | VDDQ              | VDD               | VSS                | VSS               | VSS                | VDD               | VDDQ              | NC   | I/O5              |
| G | NC                 | I/O11             | VDDQ              | VDD               | VSS                | VSS               | VSS                | VDD               | VDDQ              | NC   | I/O4              |
| H | VDD <sup>(1)</sup> | NC <sup>(2)</sup> | NC                | VDD               | VSS                | VSS               | VSS                | VDD               | NC                | NC   | ZZ <sup>(3)</sup> |
| J | I/O12              | NC                | VDDQ              | VDD               | VSS                | VSS               | VSS                | VDD               | VDDQ              | I/O3 | NC                |
| K | I/O13              | NC                | VDDQ              | VDD               | VSS                | VSS               | VSS                | VDD               | VDDQ              | I/O2 | NC                |
| L | I/O14              | NC                | VDDQ              | VDD               | VSS                | VSS               | VSS                | VDD               | VDDQ              | I/O1 | NC                |
| M | I/O15              | NC                | VDDQ              | VDD               | VSS                | VSS               | VSS                | VDD               | VDDQ              | I/O0 | NC                |
| N | I/OP2              | NC                | VDDQ              | VSS               | DNU <sup>(5)</sup> | NC <sup>(4)</sup> | NC <sup>(2)</sup>  | VSS               | VDDQ              | NC   | NC                |
| P | NC                 | NC <sup>(4)</sup> | A5                | A2                | DNU <sup>(5)</sup> | A1                | DNU <sup>(5)</sup> | A11               | A14               | A15  | NC <sup>(4)</sup> |
| R | $\overline{LBO}$   | NC <sup>(4)</sup> | A4                | A3                | DNU <sup>(5)</sup> | A0                | DNU <sup>(5)</sup> | A12               | A13               | A16  | A17               |

5301 tbl 17a

### NOTES:

- H1 can either be directly connected to VDD, or connected to an input voltage  $\geq V_{IH}$ , or left unconnected.
- H2 and N7 can be either NC or connected to VSS.
- H11 can be left unconnected and the device will always remain in active mode.
- Pins P11, N6, B11, A1, R2 and P2 are reserved for 9M, 18M, 36M, 72M, 144M and 288M respectively.
- DNU = Do not use; Pins P5, P7, R5, R7 and N5 are reserved for respective JTAG Pins: TDI, TDO, TMS, TCK and  $\overline{TRST}$  on future revisions. Within the current version these pins are not connected.

## DC Electrical Characteristics Over the Operating Temperature and Supply Voltage Range ( $V_{DD} = 3.3V \pm 5\%$ )

| Symbol      | Parameter                                                    | Test Conditions                                        | Min. | Max. | Unit    |
|-------------|--------------------------------------------------------------|--------------------------------------------------------|------|------|---------|
| $ I_{LI} $  | Input Leakage Current                                        | $V_{DD} = \text{Max.}, V_{IN} = 0V \text{ to } V_{DD}$ | —    | 5    | $\mu A$ |
| $ I_{LZZ} $ | ZZ and $\overline{LBO}$ Input Leakage Current <sup>(1)</sup> | $V_{DD} = \text{Max.}, V_{IN} = 0V \text{ to } V_{DD}$ | —    | 30   | $\mu A$ |
| $ I_{LO} $  | Output Leakage Current                                       | $V_{OUT} = 0V \text{ to } V_{DDQ}$ , Device Deselected | —    | 5    | $\mu A$ |
| $V_{OL}$    | Output Low Voltage                                           | $I_{OL} = +8mA$ , $V_{DD} = \text{Min.}$               | —    | 0.4  | V       |
| $V_{OH}$    | Output High Voltage                                          | $I_{OH} = -8mA$ , $V_{DD} = \text{Min.}$               | 2.4  | —    | V       |

5301 tbl 08

### NOTE:

1. The  $\overline{LBO}$  pin will be internally pulled to  $V_{DD}$  if it is not actively driven in the application and the ZZ pin will be internally pulled to  $V_{SS}$  if not actively driven.

## DC Electrical Characteristics Over the Operating Temperature and Supply Voltage Range<sup>(1)</sup>

| Symbol    | Parameter                          | Test Conditions                                                                                                                                   | 200MHz | 183MHz |     | 166 MHz |     | Unit |
|-----------|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|--------|--------|-----|---------|-----|------|
|           |                                    |                                                                                                                                                   | Com'l  | Com'l  | Ind | Com'l   | Ind |      |
| $I_{DD}$  | Operating Power Supply Current     | Device Selected, Outputs Open, $V_{DD} = \text{Max.}$ , $V_{DDQ} = \text{Max.}$ , $V_{IN} \geq V_{IH}$ or $\leq V_{IL}$ , $f = f_{MAX}^{(2)}$     | 360    | 340    | 350 | 320     | 330 | mA   |
| $I_{SB1}$ | CMOS Standby Power Supply Current  | Device Deselected, Outputs Open, $V_{DD} = \text{Max.}$ , $V_{DDQ} = \text{Max.}$ , $V_{IN} \geq V_{HD}$ or $\leq V_{LD}$ , $f = 0^{(2,3)}$       | 30     | 30     | 35  | 30      | 35  | mA   |
| $I_{SB2}$ | Clock Running Power Supply Current | Device Deselected, Outputs Open, $V_{DD} = \text{Max.}$ , $V_{DDQ} = \text{Max.}$ , $V_{IN} \geq V_{HD}$ or $\leq V_{LD}$ , $f = f_{MAX}^{(2,3)}$ | 130    | 120    | 130 | 110     | 120 | mA   |
| $I_{ZZ}$  | Full Sleep Mode Supply Current     | $ZZ \geq V_{HD}$ , $V_{DD} = \text{Max.}$                                                                                                         | 30     | 30     | 35  | 30      | 35  | mA   |

5301 tbl 09

### NOTES:

1. All values are maximum guaranteed values.
2. At  $f = f_{MAX}$ , inputs are cycling at the maximum frequency of read cycles of  $1/t_{CYC}$  while  $\overline{ADSC} = \text{LOW}$ ;  $f=0$  means no input lines are changing.
3. For I/Os  $V_{HD} = V_{DDQ} - 0.2V$ ,  $V_{LD} = 0.2V$ . For other inputs  $V_{HD} = V_{DD} - 0.2V$ ,  $V_{LD} = 0.2V$ .

## AC Test Conditions ( $V_{DDQ} = 3.3V$ )

|                                |              |
|--------------------------------|--------------|
| Input Pulse Levels             | 0 to 3V      |
| Input Rise/Fall Times          | 2ns          |
| Input Timing Reference Levels  | 1.5V         |
| Output Timing Reference Levels | 1.5V         |
| AC Test Load                   | See Figure 1 |

5301 tbl 10

## AC Test Load

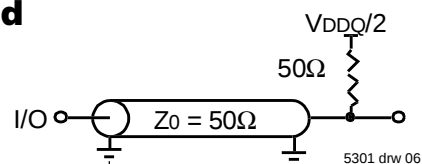


Figure 1. AC Test Load

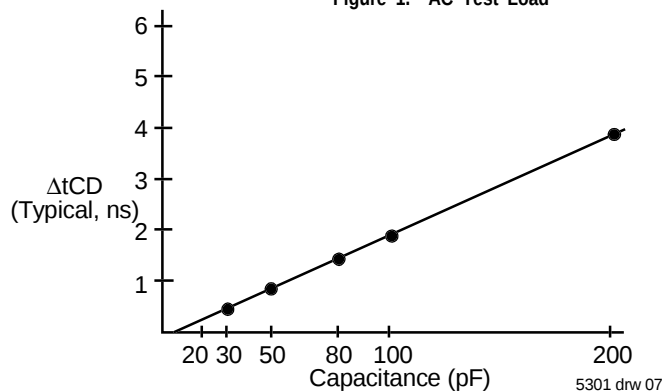


Figure 2. Lumped Capacitive Load, Typical Derating

## Synchronous Truth Table<sup>(1,3)</sup>

| Operation                    | Address Used | $\overline{CE}$ | $CS_0$ | $\overline{CS}_1$ | $\overline{ADSP}$ | $\overline{ADSC}$ | $\overline{ADV}$ | $\overline{GW}$ | $\overline{BWE}$ | $\overline{BW}_x$ | $\overline{OE}$ (2) | CLK | I/O  |
|------------------------------|--------------|-----------------|--------|-------------------|-------------------|-------------------|------------------|-----------------|------------------|-------------------|---------------------|-----|------|
| Deselected Cycle, Power Down | None         | H               | X      | X                 | X                 | L                 | X                | X               | X                | X                 | X                   | -   | HI-Z |
| Deselected Cycle, Power Down | None         | L               | X      | H                 | L                 | X                 | X                | X               | X                | X                 | X                   | -   | HI-Z |
| Deselected Cycle, Power Down | None         | L               | L      | X                 | L                 | X                 | X                | X               | X                | X                 | X                   | -   | HI-Z |
| Deselected Cycle, Power Down | None         | L               | X      | H                 | X                 | L                 | X                | X               | X                | X                 | X                   | -   | HI-Z |
| Deselected Cycle, Power Down | None         | L               | L      | X                 | X                 | L                 | X                | X               | X                | X                 | X                   | -   | HI-Z |
| Read Cycle, Begin Burst      | External     | L               | H      | L                 | L                 | X                 | X                | X               | X                | X                 | L                   | -   | DOUT |
| Read Cycle, Begin Burst      | External     | L               | H      | L                 | L                 | X                 | X                | X               | X                | X                 | H                   | -   | HI-Z |
| Read Cycle, Begin Burst      | External     | L               | H      | L                 | H                 | L                 | X                | H               | H                | X                 | L                   | -   | DOUT |
| Read Cycle, Begin Burst      | External     | L               | H      | L                 | H                 | L                 | X                | H               | L                | H                 | L                   | -   | DOUT |
| Read Cycle, Begin Burst      | External     | L               | H      | L                 | H                 | L                 | X                | H               | L                | H                 | H                   | -   | HI-Z |
| Write Cycle, Begin Burst     | External     | L               | H      | L                 | H                 | L                 | X                | H               | L                | L                 | X                   | -   | DIN  |
| Write Cycle, Begin Burst     | External     | L               | H      | L                 | H                 | L                 | X                | L               | X                | X                 | X                   | -   | DIN  |
| Read Cycle, Continue Burst   | Next         | X               | X      | X                 | H                 | H                 | L                | H               | H                | X                 | L                   | -   | DOUT |
| Read Cycle, Continue Burst   | Next         | X               | X      | X                 | H                 | H                 | L                | H               | H                | X                 | H                   | -   | HI-Z |
| Read Cycle, Continue Burst   | Next         | X               | X      | X                 | H                 | H                 | L                | H               | X                | H                 | L                   | -   | DOUT |
| Read Cycle, Continue Burst   | Next         | X               | X      | X                 | H                 | H                 | L                | H               | X                | H                 | H                   | -   | HI-Z |
| Read Cycle, Continue Burst   | Next         | H               | X      | X                 | X                 | H                 | L                | H               | H                | X                 | L                   | -   | DOUT |
| Read Cycle, Continue Burst   | Next         | H               | X      | X                 | X                 | H                 | L                | H               | H                | X                 | H                   | -   | HI-Z |
| Read Cycle, Continue Burst   | Next         | H               | X      | X                 | X                 | H                 | L                | H               | X                | H                 | L                   | -   | DOUT |
| Read Cycle, Continue Burst   | Next         | H               | X      | X                 | X                 | H                 | L                | H               | X                | H                 | H                   | -   | HI-Z |
| Write Cycle, Continue Burst  | Next         | X               | X      | X                 | H                 | H                 | L                | H               | L                | L                 | X                   | -   | DIN  |
| Write Cycle, Continue Burst  | Next         | X               | X      | X                 | H                 | H                 | L                | L               | X                | X                 | X                   | -   | DIN  |
| Write Cycle, Continue Burst  | Next         | H               | X      | X                 | X                 | H                 | L                | H               | L                | L                 | X                   | -   | DIN  |
| Write Cycle, Continue Burst  | Next         | H               | X      | X                 | X                 | H                 | L                | L               | X                | X                 | X                   | -   | DIN  |
| Read Cycle, Suspend Burst    | Current      | X               | X      | X                 | H                 | H                 | H                | H               | H                | X                 | L                   | -   | DOUT |
| Read Cycle, Suspend Burst    | Current      | X               | X      | X                 | H                 | H                 | H                | H               | H                | X                 | H                   | -   | HI-Z |
| Read Cycle, Suspend Burst    | Current      | X               | X      | X                 | H                 | H                 | H                | H               | X                | H                 | L                   | -   | DOUT |
| Read Cycle, Suspend Burst    | Current      | X               | X      | X                 | H                 | H                 | H                | H               | X                | H                 | H                   | -   | HI-Z |
| Read Cycle, Suspend Burst    | Current      | H               | X      | X                 | X                 | H                 | H                | H               | H                | X                 | L                   | -   | DOUT |
| Read Cycle, Suspend Burst    | Current      | H               | X      | X                 | X                 | H                 | H                | H               | H                | X                 | H                   | -   | HI-Z |
| Read Cycle, Suspend Burst    | Current      | H               | X      | X                 | X                 | H                 | H                | H               | X                | H                 | L                   | -   | DOUT |
| Read Cycle, Suspend Burst    | Current      | H               | X      | X                 | X                 | H                 | H                | H               | X                | H                 | H                   | -   | HI-Z |
| Write Cycle, Suspend Burst   | Current      | X               | X      | X                 | H                 | H                 | H                | H               | L                | L                 | X                   | -   | DIN  |
| Write Cycle, Suspend Burst   | Current      | X               | X      | X                 | H                 | H                 | H                | L               | X                | X                 | X                   | -   | DIN  |
| Write Cycle, Suspend Burst   | Current      | H               | X      | X                 | X                 | H                 | H                | H               | L                | L                 | X                   | -   | DIN  |
| Write Cycle, Suspend Burst   | Current      | H               | X      | X                 | X                 | H                 | H                | L               | X                | X                 | X                   | -   | DIN  |

5301bl 11

### NOTES:

1. L =  $V_{IL}$ , H =  $V_{IH}$ , X = Don't Care.
2.  $\overline{OE}$  is an asynchronous input.
3. ZZ = low for this table.

## Synchronous Write Function Truth Table<sup>(1, 2)</sup>

| Operation                   | $\overline{GW}$ | $\overline{BWE}$ | $\overline{BW}_1$ | $\overline{BW}_2$ | $\overline{BW}_3$ | $\overline{BW}_4$ |
|-----------------------------|-----------------|------------------|-------------------|-------------------|-------------------|-------------------|
| Read                        | H               | H                | X                 | X                 | X                 | X                 |
| Read                        | H               | L                | H                 | H                 | H                 | H                 |
| Write all Bytes             | L               | X                | X                 | X                 | X                 | X                 |
| Write all Bytes             | H               | L                | L                 | L                 | L                 | L                 |
| Write Byte 1 <sup>(3)</sup> | H               | L                | L                 | H                 | H                 | H                 |
| Write Byte 2 <sup>(3)</sup> | H               | L                | H                 | L                 | H                 | H                 |
| Write Byte 3 <sup>(3)</sup> | H               | L                | H                 | H                 | L                 | H                 |
| Write Byte 4 <sup>(3)</sup> | H               | L                | H                 | H                 | H                 | L                 |

5301 tbl 12

### NOTES:

1. L =  $V_{IL}$ , H =  $V_{IH}$ , X = Don't Care.
2.  $\overline{BW}_3$  and  $\overline{BW}_4$  are not applicable for the IDT71V35781.
3. Multiple bytes may be selected during the same cycle.

## Asynchronous Truth Table<sup>(1)</sup>

| Operation <sup>(2)</sup> | $\overline{OE}$ | ZZ | I/O Status       | Power   |
|--------------------------|-----------------|----|------------------|---------|
| Read                     | L               | L  | Data Out         | Active  |
| Read                     | H               | L  | High-Z           | Active  |
| Write                    | X               | L  | High-Z – Data In | Active  |
| Deselected               | X               | L  | High-Z           | Standby |
| Sleep Mode               | X               | H  | High-Z           | Sleep   |

5301 tbl 13

### NOTES:

1. L =  $V_{IL}$ , H =  $V_{IH}$ , X = Don't Care.
2. Synchronous function pins must be biased appropriately to satisfy operation requirements.

## Interleaved Burst Sequence Table ( $\overline{LBO}=V_{DD}$ )

|                               | Sequence 1 |    | Sequence 2 |    | Sequence 3 |    | Sequence 4 |    |
|-------------------------------|------------|----|------------|----|------------|----|------------|----|
|                               | A1         | A0 | A1         | A0 | A1         | A0 | A1         | A0 |
| First Address                 | 0          | 0  | 0          | 1  | 1          | 0  | 1          | 1  |
| Second Address                | 0          | 1  | 0          | 0  | 1          | 1  | 1          | 0  |
| Third Address                 | 1          | 0  | 1          | 1  | 0          | 0  | 0          | 1  |
| Fourth Address <sup>(1)</sup> | 1          | 1  | 1          | 0  | 0          | 1  | 0          | 0  |

5301 tbl 14

### NOTE:

1. Upon completion of the Burst sequence the counter wraps around to its initial state.

## Linear Burst Sequence Table ( $\overline{LBO}=V_{SS}$ )

|                               | Sequence 1 |    | Sequence 2 |    | Sequence 3 |    | Sequence 4 |    |
|-------------------------------|------------|----|------------|----|------------|----|------------|----|
|                               | A1         | A0 | A1         | A0 | A1         | A0 | A1         | A0 |
| First Address                 | 0          | 0  | 0          | 1  | 1          | 0  | 1          | 1  |
| Second Address                | 0          | 1  | 1          | 0  | 1          | 1  | 0          | 0  |
| Third Address                 | 1          | 0  | 1          | 1  | 0          | 0  | 0          | 1  |
| Fourth Address <sup>(1)</sup> | 1          | 1  | 0          | 0  | 0          | 1  | 1          | 0  |

5301 tbl 15

### NOTE:

1. Upon completion of the Burst sequence the counter wraps around to its initial state.

## AC Electrical Characteristics

(VDD = 3.3V ±5%, Commercial and Industrial Temperature Ranges)

| Symbol                                         | Parameter                           | 200MHz <sup>(5)</sup> |      | 183MHz |      | 166MHz |      | Unit |
|------------------------------------------------|-------------------------------------|-----------------------|------|--------|------|--------|------|------|
|                                                |                                     | Min.                  | Max. | Min.   | Max. | Min.   | Max. |      |
| t <sub>CYC</sub>                               | Clock Cycle Time                    | 5                     | —    | 5.5    | —    | 6      | —    | ns   |
| t <sub>CH</sub> <sup>(1)</sup>                 | Clock High Pulse Width              | 2                     | —    | 2.2    | —    | 2.4    | —    | ns   |
| t <sub>CL</sub> <sup>(1)</sup>                 | Clock Low Pulse Width               | 2                     | —    | 2.2    | —    | 2.4    | —    | ns   |
| <b>Output Parameters</b>                       |                                     |                       |      |        |      |        |      |      |
| t <sub>CD</sub>                                | Clock High to Valid Data            | —                     | 3.1  | —      | 3.3  | —      | 3.5  | ns   |
| t <sub>ODC</sub>                               | Clock High to Data Change           | 1.0                   | —    | 1.0    | —    | 1.0    | —    | ns   |
| t <sub>OLZ</sub> <sup>(2)</sup>                | Clock High to Output Active         | 0                     | —    | 0      | —    | 0      | —    | ns   |
| t <sub>CHZ</sub> <sup>(2)</sup>                | Clock High to Data High-Z           | 1.5                   | 3.1  | 1.5    | 3.3  | 1.5    | 3.5  | ns   |
| t <sub>OE</sub>                                | Output Enable Access Time           | —                     | 3.1  | —      | 3.3  | —      | 3.5  | ns   |
| t <sub>OLZ</sub> <sup>(2)</sup>                | Output Enable Low to Output Active  | 0                     | —    | 0      | —    | 0      | —    | ns   |
| t <sub>OHZ</sub> <sup>(2)</sup>                | Output Enable High to Output High-Z | —                     | 3.1  | —      | 3.3  | —      | 3.5  | ns   |
| <b>Set Up Times</b>                            |                                     |                       |      |        |      |        |      |      |
| t <sub>SA</sub>                                | Address Setup Time                  | 1.2                   | —    | 1.5    | —    | 1.5    | —    | ns   |
| t <sub>SS</sub>                                | Address Status Setup Time           | 1.2                   | —    | 1.5    | —    | 1.5    | —    | ns   |
| t <sub>SD</sub>                                | Data In Setup Time                  | 1.2                   | —    | 1.5    | —    | 1.5    | —    | ns   |
| t <sub>SW</sub>                                | Write Setup Time                    | 1.2                   | —    | 1.5    | —    | 1.5    | —    | ns   |
| t <sub>SAV</sub>                               | Address Advance Setup Time          | 1.2                   | —    | 1.5    | —    | 1.5    | —    | ns   |
| t <sub>SC</sub>                                | Chip Enable/Select Setup Time       | 1.2                   | —    | 1.5    | —    | 1.5    | —    | ns   |
| <b>Hold Times</b>                              |                                     |                       |      |        |      |        |      |      |
| t <sub>HA</sub>                                | Address Hold Time                   | 0.4                   | —    | 0.5    | —    | 0.5    | —    | ns   |
| t <sub>HS</sub>                                | Address Status Hold Time            | 0.4                   | —    | 0.5    | —    | 0.5    | —    | ns   |
| t <sub>HD</sub>                                | Data In Hold Time                   | 0.4                   | —    | 0.5    | —    | 0.5    | —    | ns   |
| t <sub>HW</sub>                                | Write Hold Time                     | 0.4                   | —    | 0.5    | —    | 0.5    | —    | ns   |
| t <sub>HAV</sub>                               | Address Advance Hold Time           | 0.4                   | —    | 0.5    | —    | 0.5    | —    | ns   |
| t <sub>HC</sub>                                | Chip Enable/Select Hold Time        | 0.4                   | —    | 0.5    | —    | 0.5    | —    | ns   |
| <b>Sleep Mode and Configuration Parameters</b> |                                     |                       |      |        |      |        |      |      |
| t <sub>ZZPW</sub>                              | ZZ Pulse Width                      | 100                   | —    | 100    | —    | 100    | —    | ns   |
| t <sub>ZZR</sub> <sup>(3)</sup>                | ZZ Recovery Time                    | 100                   | —    | 100    | —    | 100    | —    | ns   |
| t <sub>CFG</sub> <sup>(4)</sup>                | Configuration Set-up Time           | 20                    | —    | 22     | —    | 24     | —    | ns   |

5301tbl 16

### NOTES:

1. Measured as HIGH above V<sub>IH</sub> and LOW below V<sub>IL</sub>.
2. Transition is measured ±200mV from steady-state.
3. Device must be deselected when powered-up from sleep mode.
4. t<sub>CFG</sub> is the minimum time required to configure the device based on the  $\overline{\text{LBO}}$  input.  $\overline{\text{LBO}}$  is a static input and must not change during normal operation.
5. Commercial temperature range only.


### Timing Waveform of Pipelined Read Cycle<sup>(1,2)</sup>



**NOTES:**

1. O1(Ax) represents the first output from the external address Ax. O1(Ay) represents the first output from the external address Ay; O2(Ay) represents the next output data in the burst sequence of the base address Ay, etc. where A0 and A1 are advancing for the four word burst in the sequence defined by the state of the  $\overline{\text{LBO}}$  input.
2. Zz input is LOW and  $\overline{\text{LBO}}$  is Don't Care for this cycle.
3. CS0 timing transitions are identical but inverted to the  $\overline{\text{CE}}$  and  $\overline{\text{CS1}}$  signals. For example, when  $\overline{\text{CE}}$  and  $\overline{\text{CS1}}$  are LOW on this waveform, CS0 is HIGH.

## Timing Waveform of Combined Pipelined Read and Write Cycles<sup>(1,2,3)</sup>

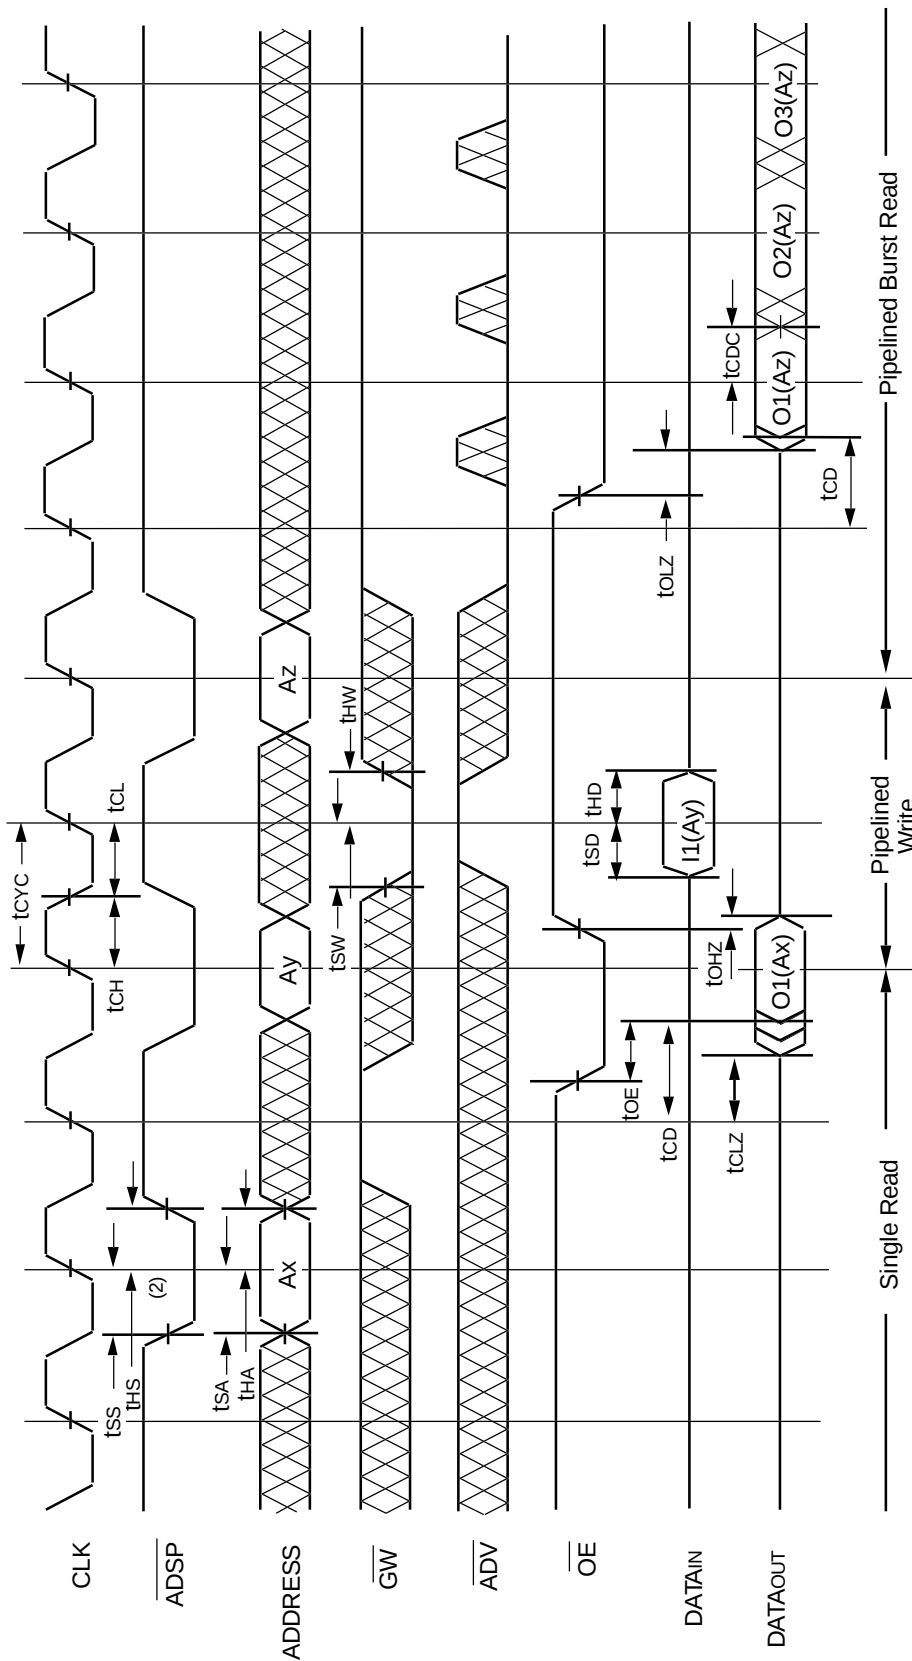


5301 drw 09

### NOTES:

1. Device is selected through entire cycle;  $\overline{CE}$  and  $\overline{CS1}$  are LOW,  $CS0$  is HIGH.
2. Z<sub>Z</sub> input is LOW and  $\overline{LBO}$  is Don't Care for this cycle.
3.  $O1(Ax)$  represents the first output from the external address  $Ax$ .  $I1(Ay)$  represents the first input from the external address  $Ay$ .  $O1(Az)$  represents the first output from the external address  $Az$ .  $O2(Az)$  represents the next output data in the burst sequence of the base address  $Az$ , etc. where  $A0$  and  $A1$  are advancing for the four word burst in the sequence defined by the state of the  $\overline{LBO}$  input.

## Timing Waveform of Write Cycle No. 1 - $\overline{GW}$ Controlled<sup>(1,2,3)</sup>

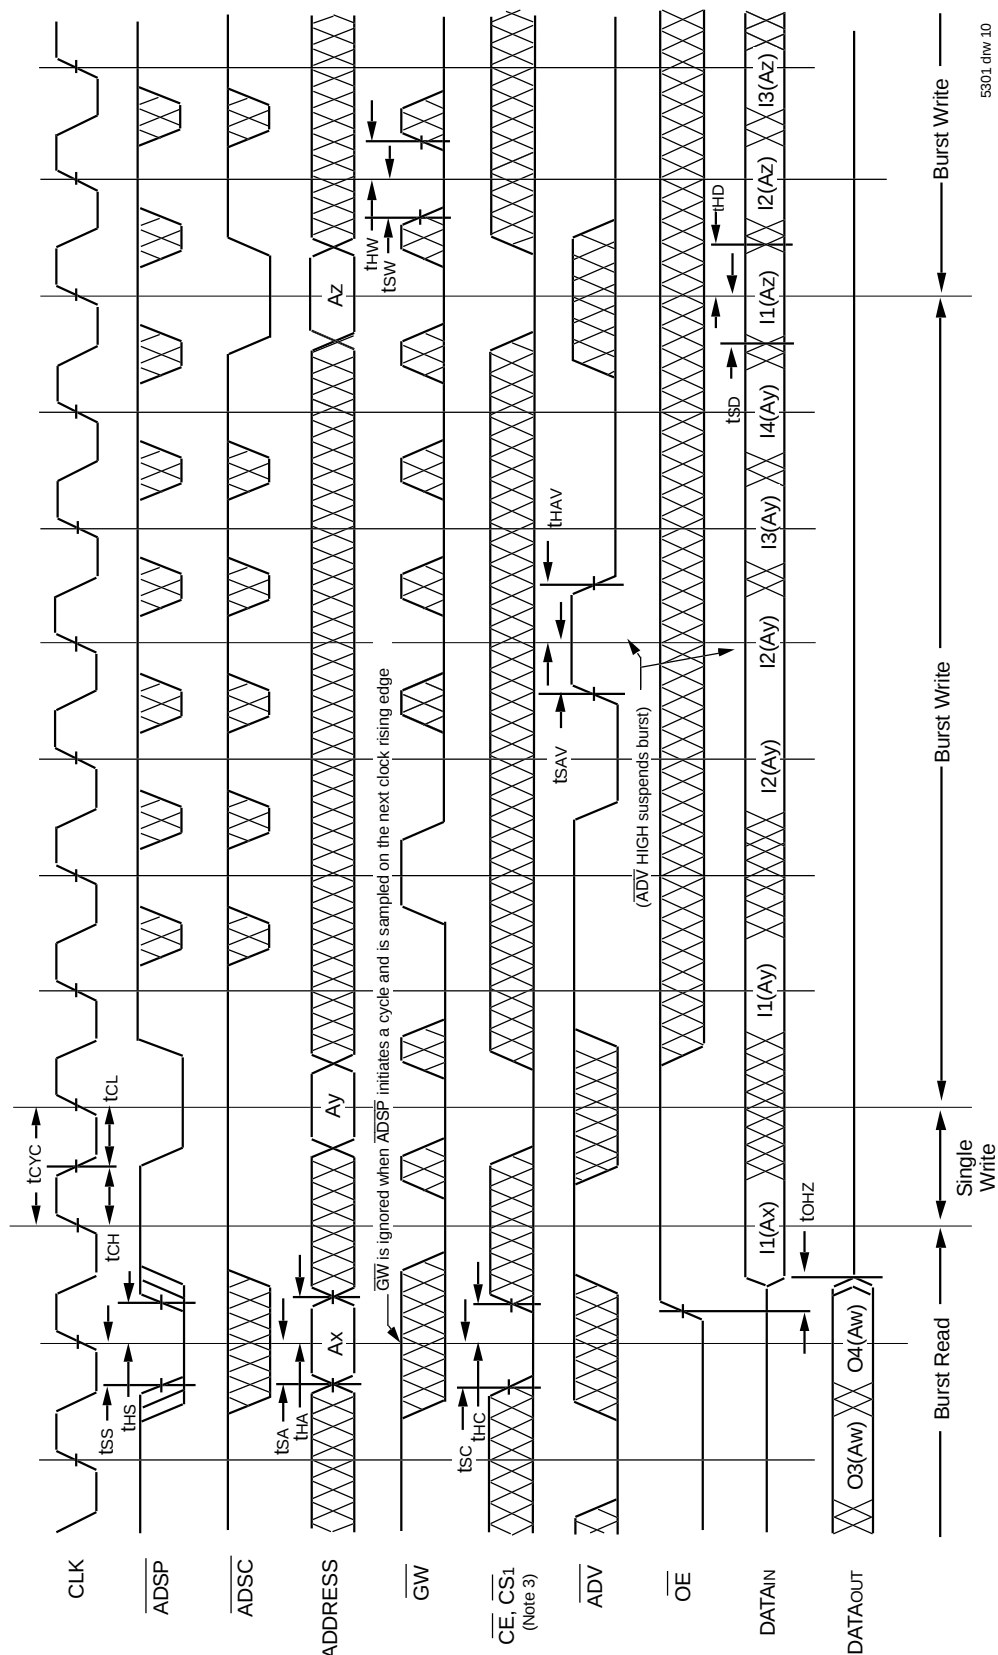


### NOTES:

1. Z $\overline{Z}$  input is LOW,  $\overline{BWE}$  is HIGH and  $\overline{LB0}$  is Don't Care for this cycle.
2. O4(Aw) represents the final output data in the burst sequence of the base address Aw. I1(Ax) represents the first input from the external address Ax. I1(Ay) represents the first input from the external address Ay; I2(Ay) represents the next input data in the burst sequence of the base address Ay, etc. where A0 and A1 are advancing for the four word burst in the sequence defined by the state of the  $\overline{LB0}$  input. In the case of input I2(Ay) this data is valid for two cycles because  $\overline{ADV}$  is high and has suspended the burst.
3. CS0 timing transitions are identical but inverted to the  $\overline{CE}$  and  $\overline{CS1}$  signals. For example, when  $\overline{CE}$  and  $\overline{CS1}$  are LOW on this waveform, CS0 is HIGH.

5301 drw 10

## Timing Waveform of Write Cycle No. 2 - Byte Controlled<sup>(1,2,3)</sup>

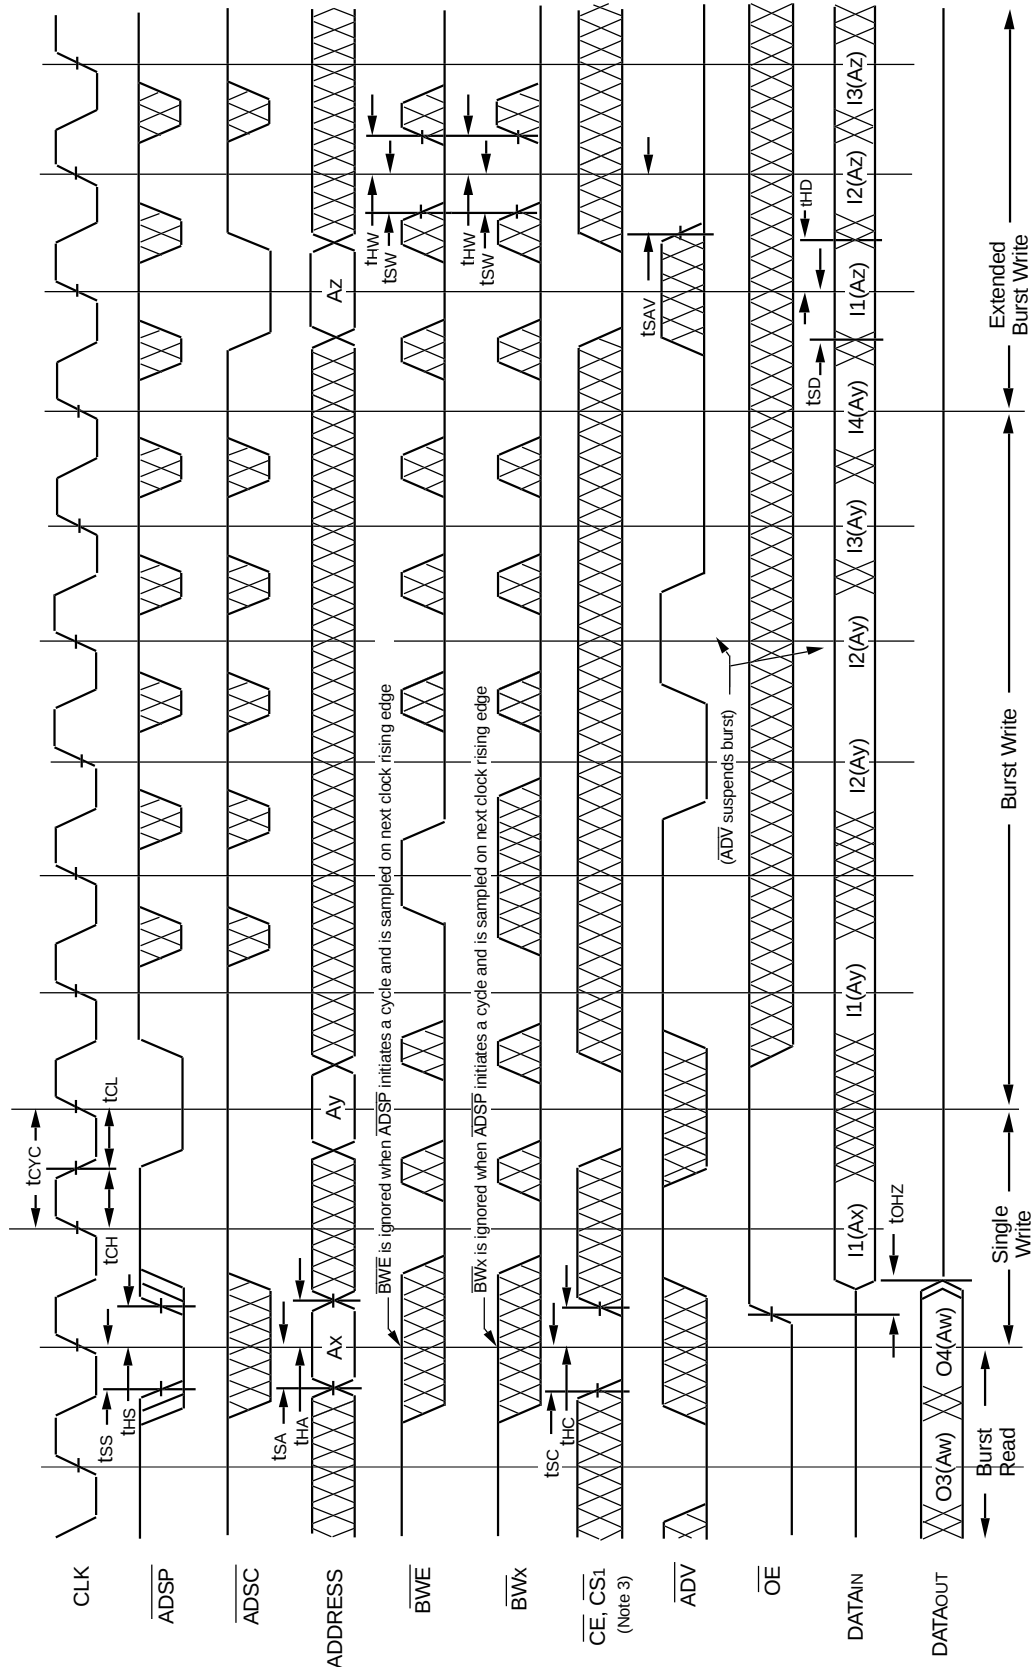


5301 dnw 11

### NOTES:

1. Z input is LOW,  $\overline{GW}$  is HIGH and  $\overline{LB0}$  is Don't Care for this cycle.
2. O4(Aw) represents the final output data in the burst sequence of the base address Aw. I1(Ax) represents the first input from the external address Ax. I2(Ay) represents the next input data in the burst sequence of the base address Ay, etc. where A0 and A1 are advancing for the four word burst in the sequence defined by the state of the  $\overline{LB0}$  input. In the case of input I2(Ay) this data is valid for two cycles because ADV is high and has suspended the burst.
3. CS0 timing transitions are identical but inverted to the CE and CS1 signals. For example, when CE and CS1 are LOW on this waveform, CS0 is HIGH.

## Timing Waveform of Sleep (ZZ) and Power-Down Modes<sup>(1,2,3)</sup>

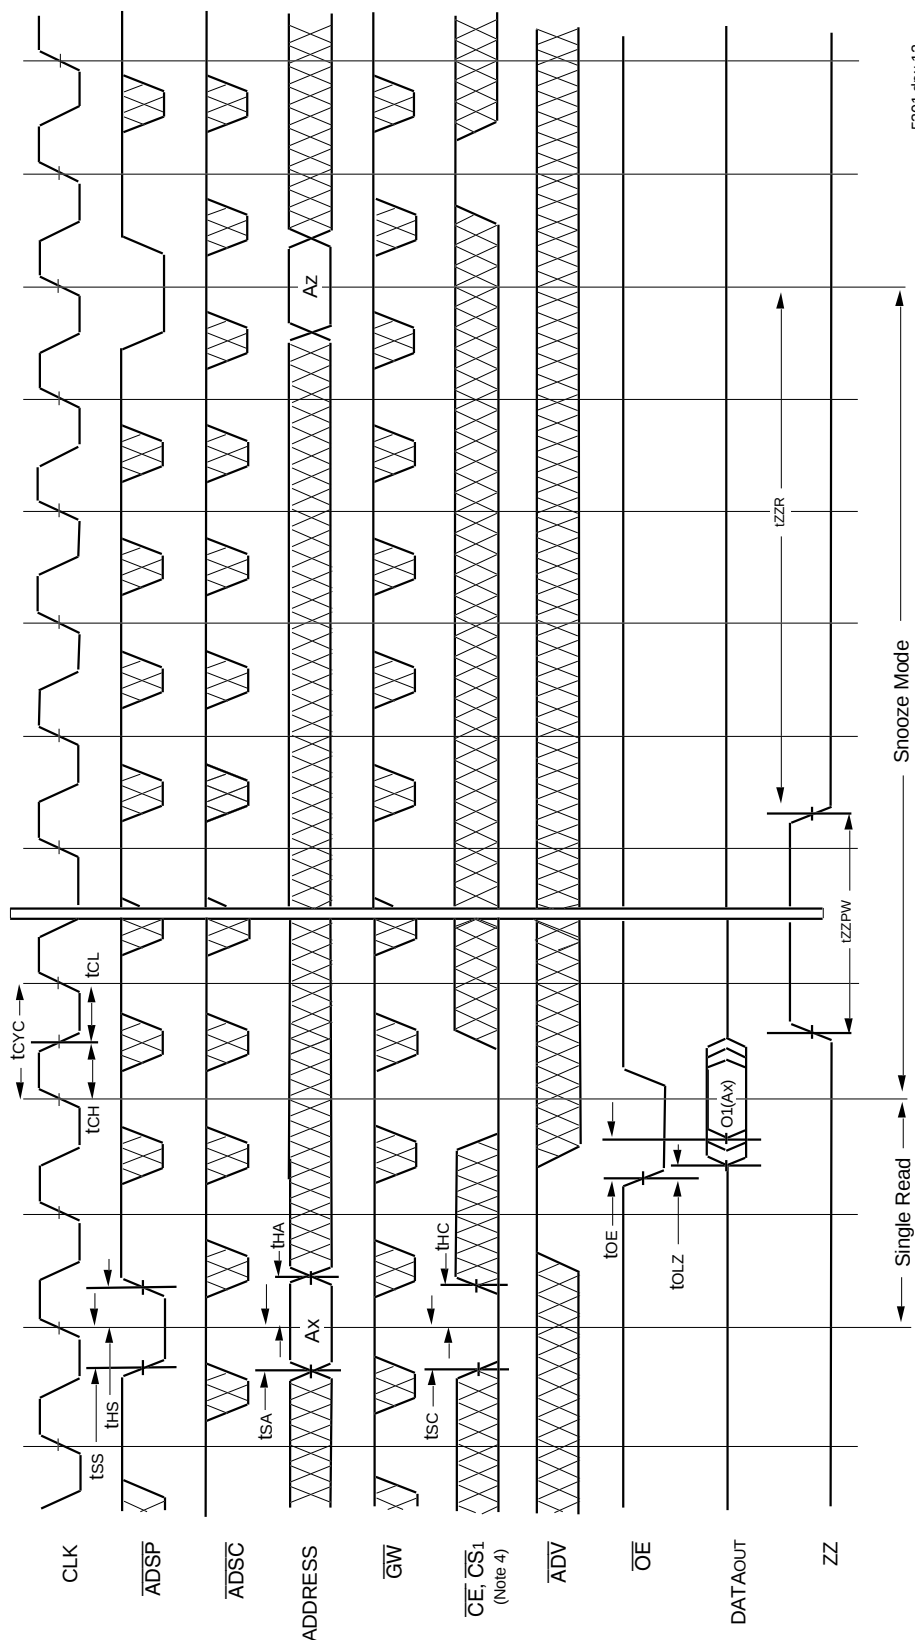


5301.drw 12

### NOTES:

1. Device must power up in deselected Mode.
2. LBO is Don't Care for this cycle.
3. It is not necessary to retain the state of the input registers throughout the Power-down cycle.
4. CS<sub>0</sub> timing transitions are identical but inverted to the CE and CS<sub>1</sub> signals. For example, when CE and CS<sub>1</sub> are LOW on this waveform, CS<sub>0</sub> is HIGH.

## Non-Burst Read Cycle Timing Waveform

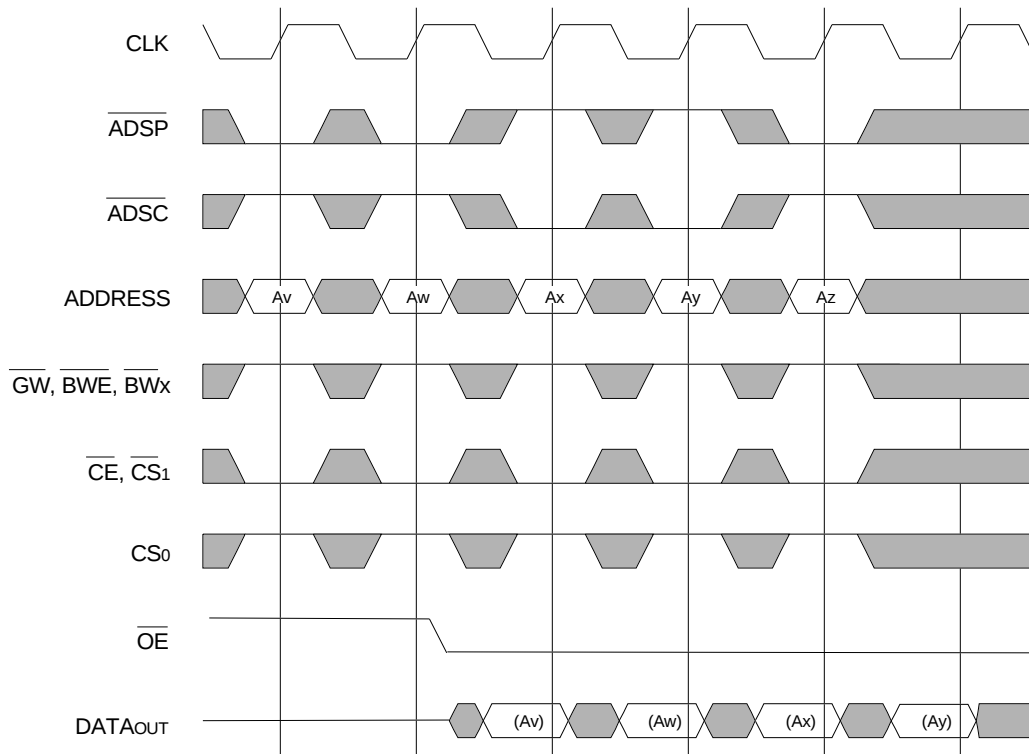


### NOTES:

1. ZZ input is LOW,  $\overline{ADV}$  is HIGH and  $\overline{LBO}$  is Don't Care for this cycle.
2. (Ax) represents the data for address Ax, etc.
3. For read cycles, ADSP and ADSC function identically and are therefore interchangeable.

5301 drw 14

## Non-Burst Write Cycle Timing Waveform

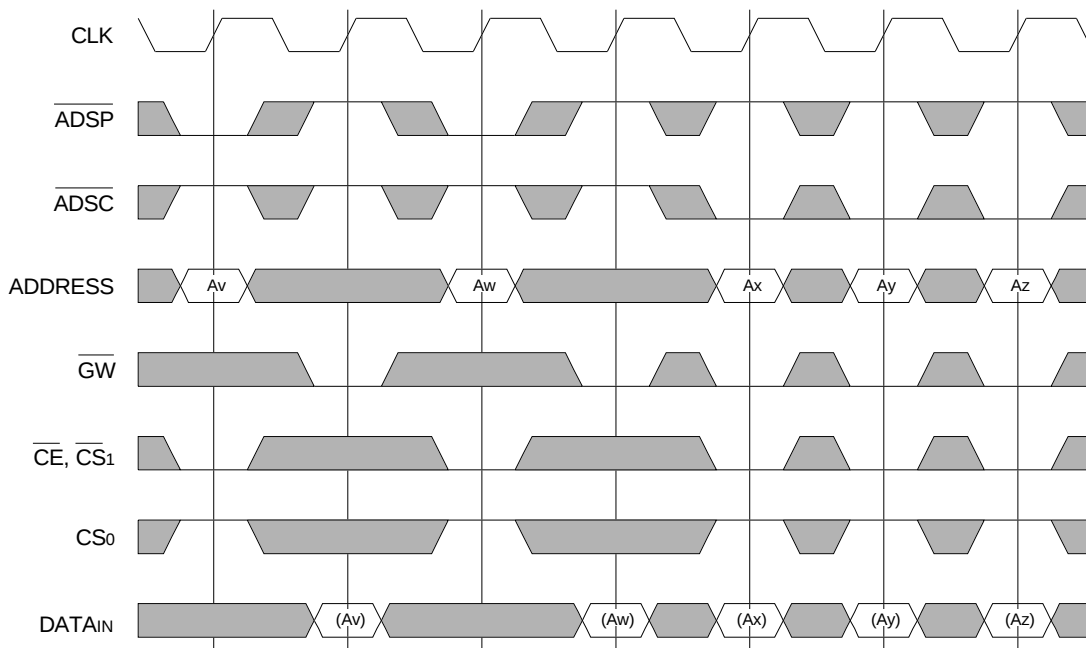


### NOTES:



1. ZZ input is LOW,  $\overline{ADV}$  and  $\overline{OE}$  are HIGH, and  $\overline{LBO}$  is Don't Care for this cycle.
2. (Ax) represents the data for address Ax, etc.
3. Although only  $\overline{GW}$  writes are shown, the functionality of  $\overline{BWE}$  and  $\overline{BWx}$  together is the same as  $\overline{GW}$ .
4. For write cycles,  $\overline{ADSP}$  and  $\overline{ADSC}$  have different limitations.

5301 drw 15



# 100-Pin Thin Plastic Quad Flatpack (TQFP) Package Diagram Outline

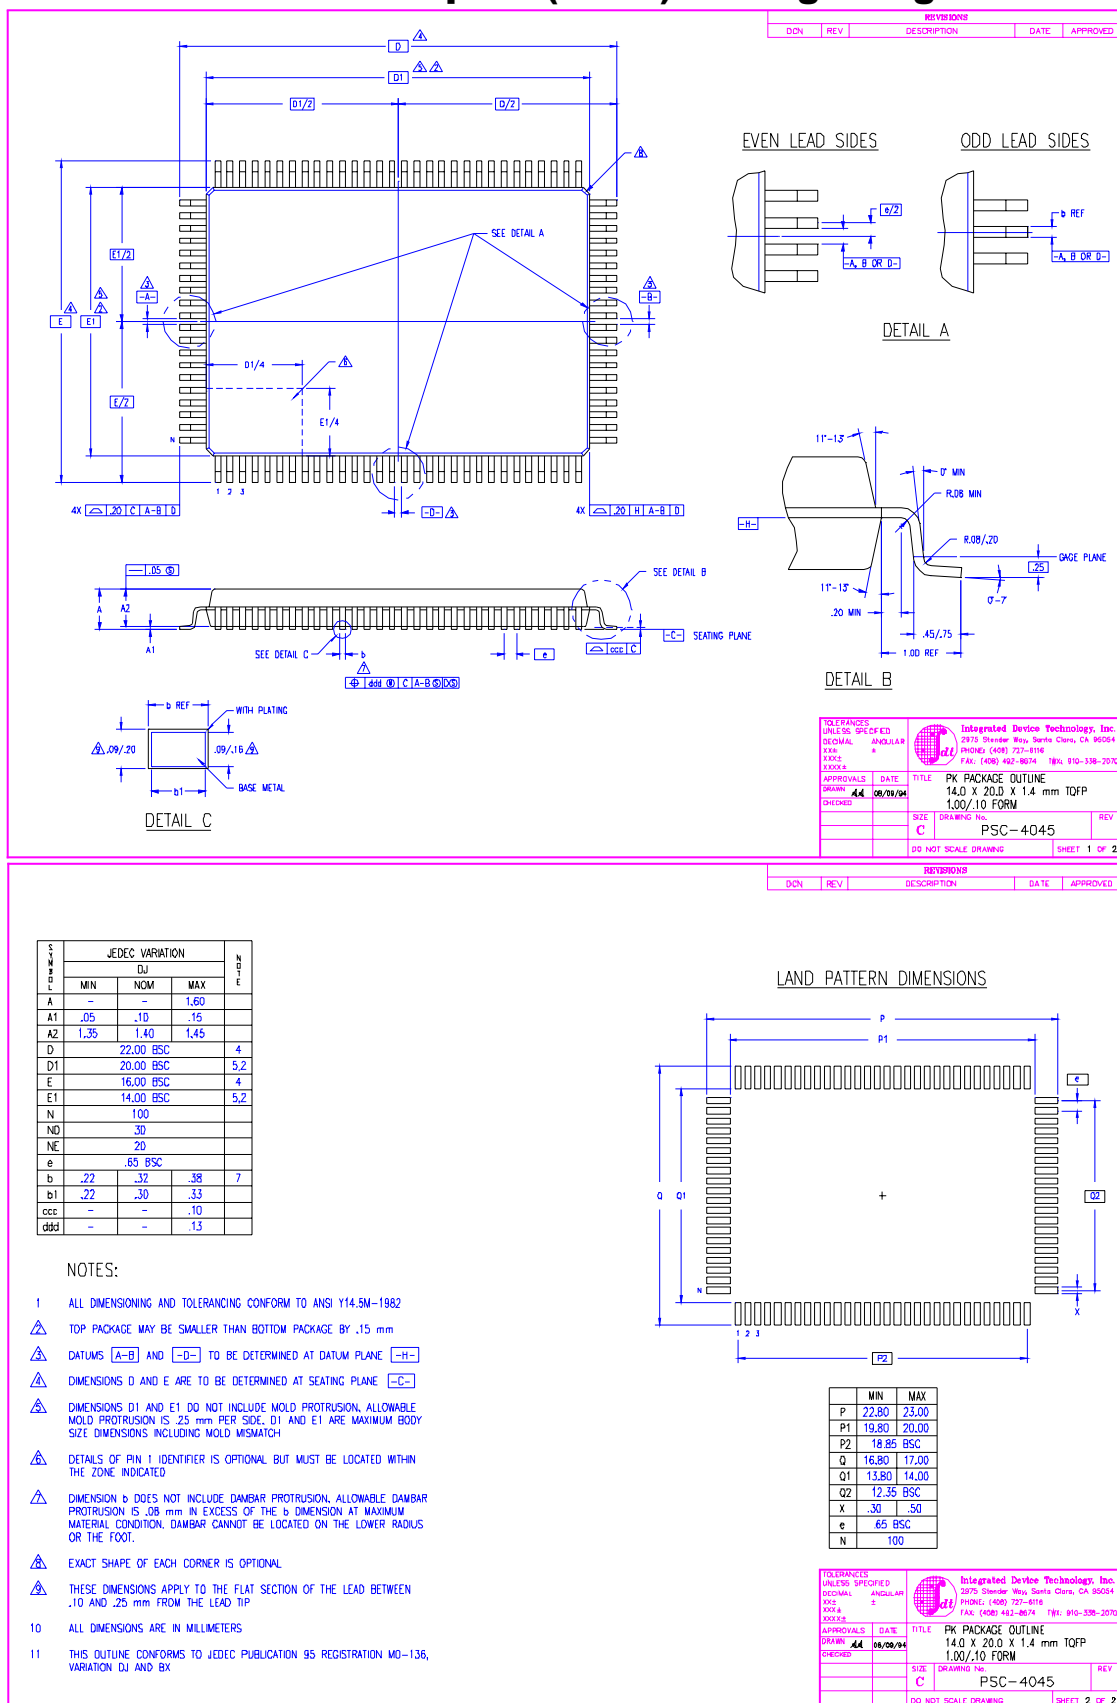


## 119 Ball Grid Array (BGA) Package Diagram Outline

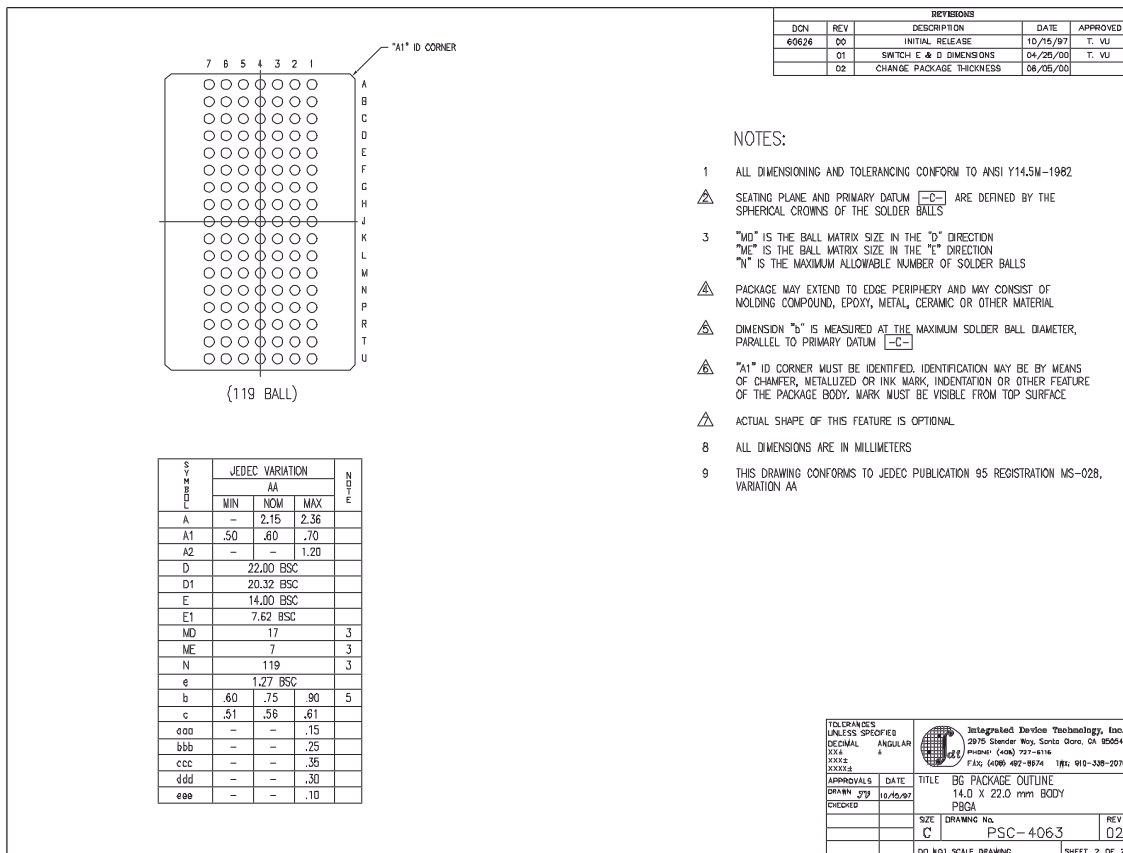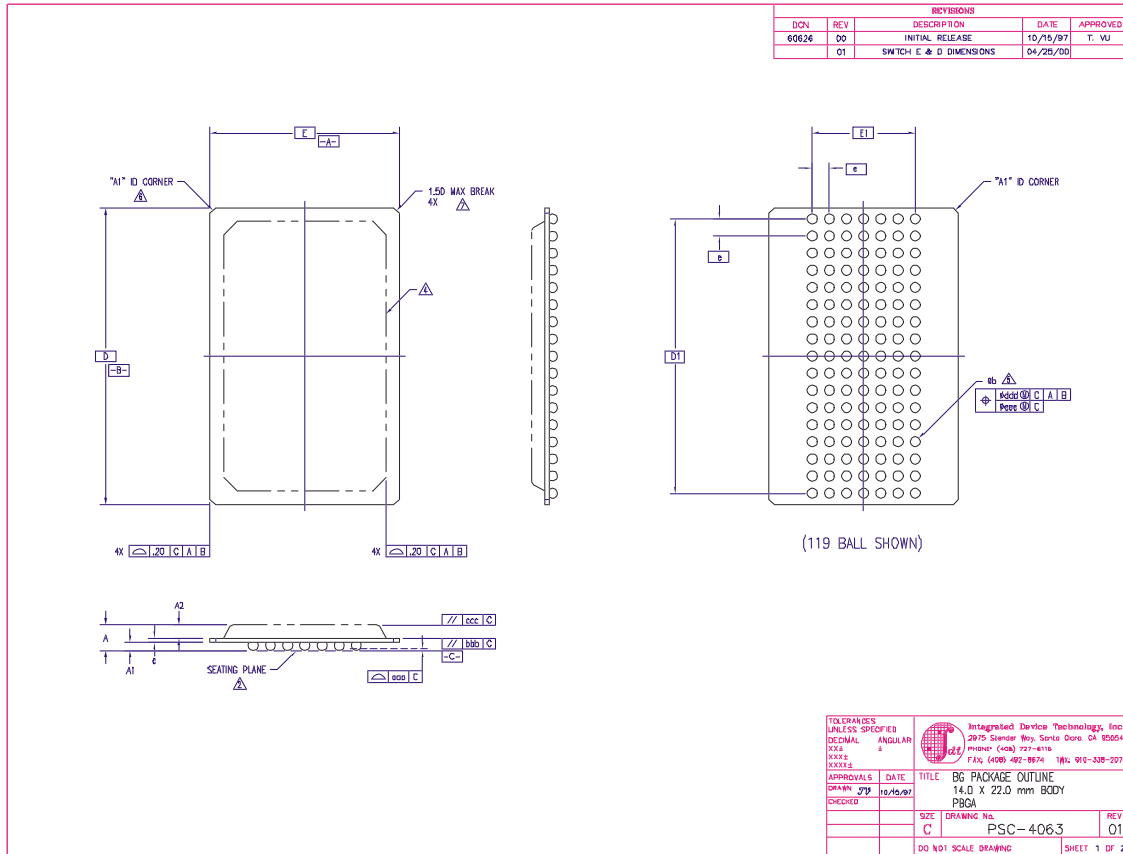

# 165 Fine Pitch Ball Grid Array (fBGA) Package Diagram Outline

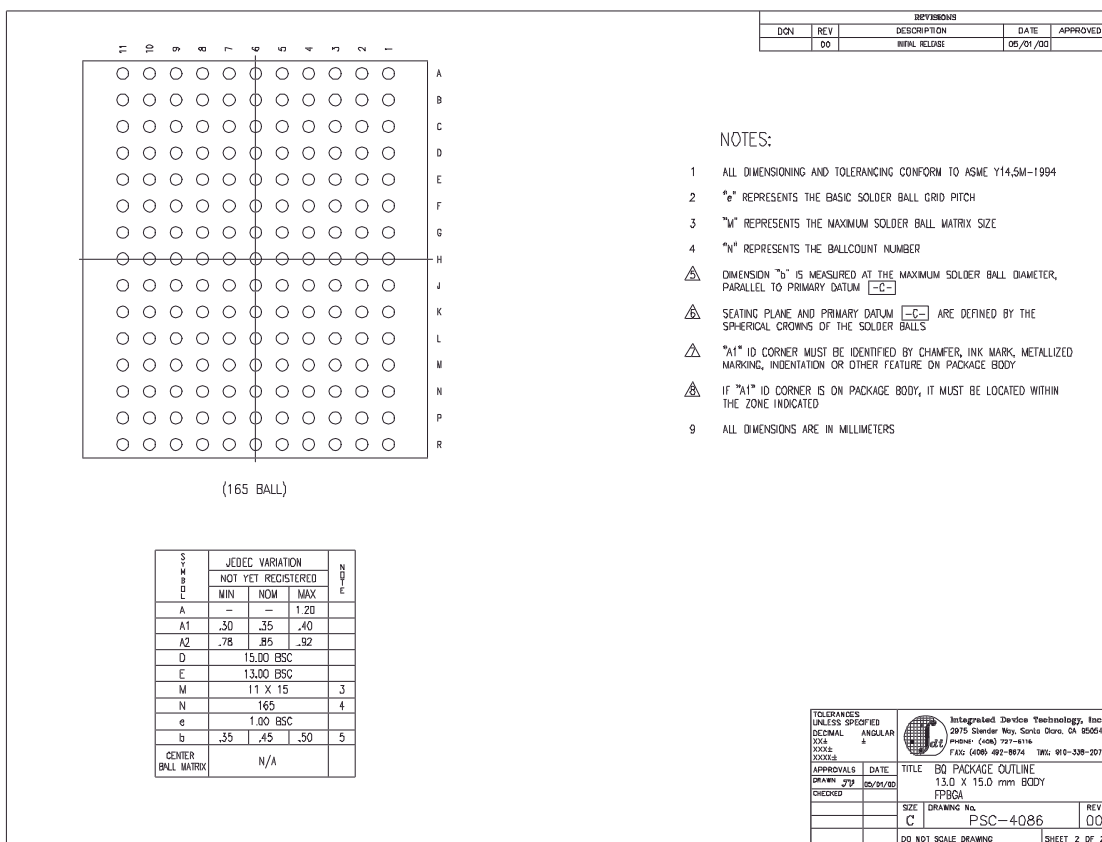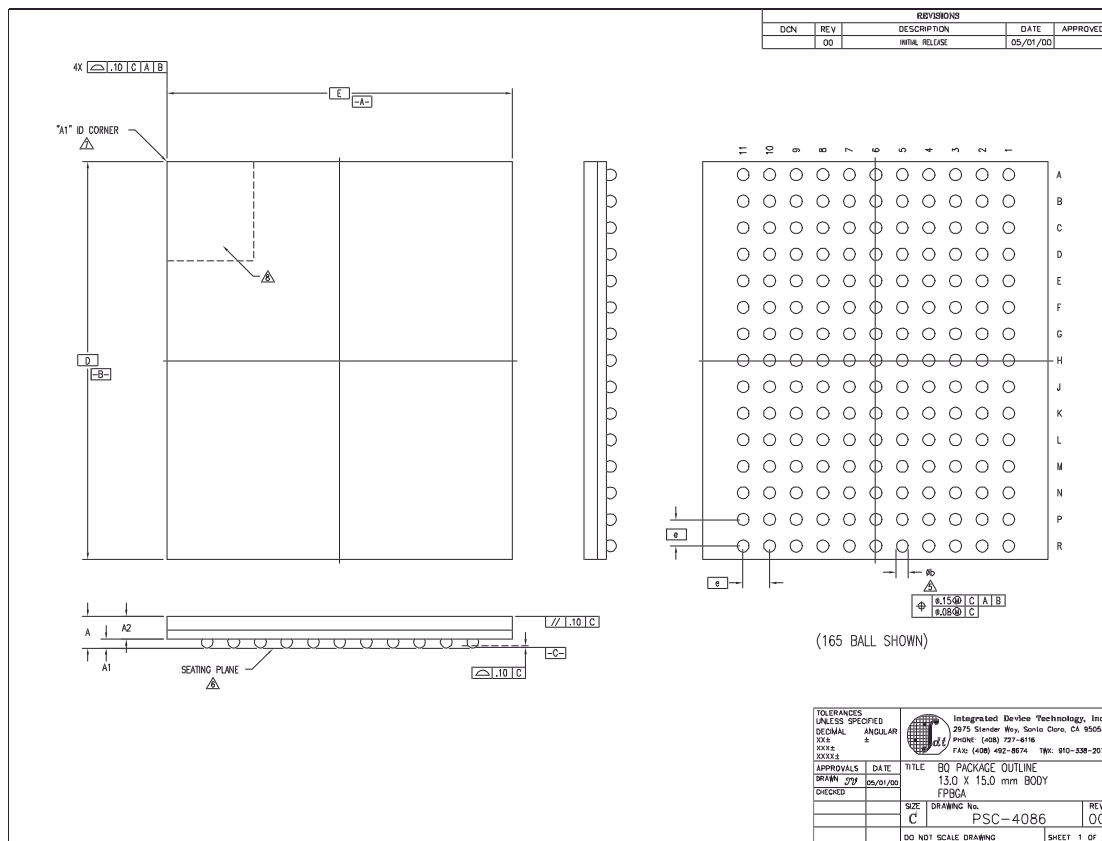

Ordering Information

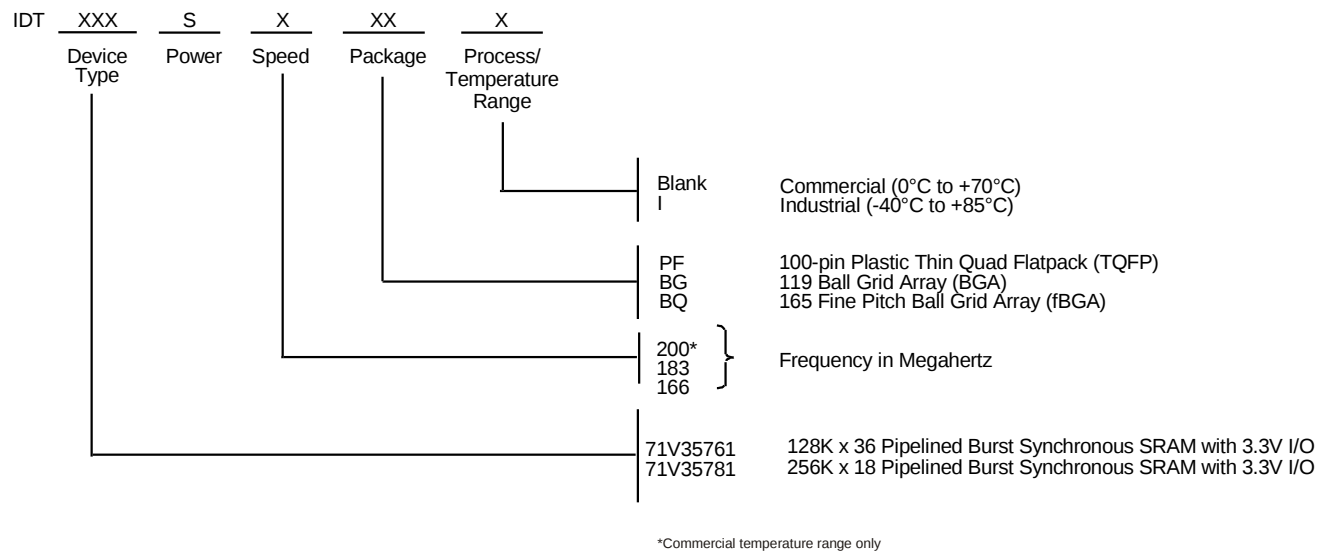

## Datasheet Document History

|          |                                        |                                                                                                                                                                                                                                                                        |
|----------|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 12/31/99 |                                        | Created new datasheet from 71v3576 and 71v3578 datasheet.                                                                                                                                                                                                              |
| 04/04/00 | Pg. 1, 4, 8, 11, 19<br>Pg. 18<br>Pg. 4 | Added industrial temperature range offering from 166MHz and 183MHz<br>Added 100 pin TQFP package Diagram Outline<br>Add BGA capacitance table; Add industrial tempertaure to table; Insert note to Absolute Max<br>Rating and Recommended Operating Temperature tables |
| 06/01/00 |                                        | Add new package diagram outline, 13 x 15mm 165fBGA                                                                                                                                                                                                                     |
| 07/15/00 | Pg. 20<br>Pg. 7<br>Pg. 8<br>Pg. 20     | Correct BG119 Package Diagram Outline<br>Add note reference to BG119 pinout<br>Add DNU reference note to BQ165 pinout<br>Update BG119 Package Diagram Outline Dimensions                                                                                               |
| 10/25/00 |                                        | Remove Preliminary status                                                                                                                                                                                                                                              |
| 04/22/03 | Pg. 8<br>Pg.4                          | Add reference note to N5 on the BQ165 pinout, reserved for JTAG $\overline{\text{TRST}}$<br>Updated 165 BGA table information from TBD to 7                                                                                                                            |



### **CORPORATE HEADQUARTERS**

2975 Stender Way  
Santa Clara, CA 95054

### **for SALES:**

800-345-7015 or 408-727-6116  
fax: 408-492-8674  
www.idt.com

### **for Tech Support:**

sramhelp@idt.com  
800-544-7726, x4033

The IDT logo is a registered trademark of Integrated Device Technology, Inc.