



This is issued in strict confidence on condition that it is not used as a basis for manufacture or sale, and that it is not copied, reprinted or disclosed to a third party either wholly or in part without prior written consent of ITT Cannon.

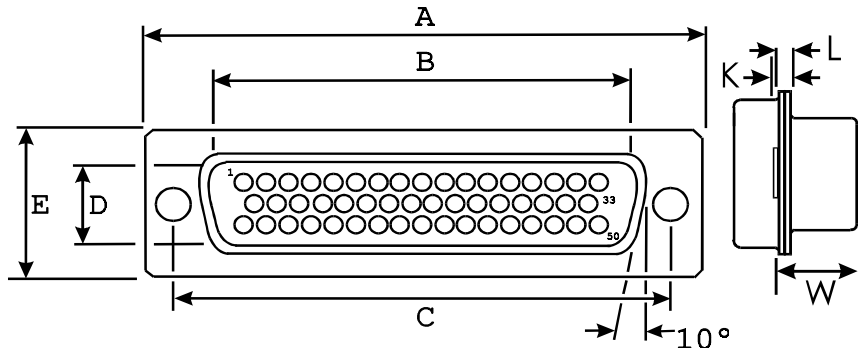


Selected hardware option
with 3,05 (.120) mounting hole

Signal contacts
not shown for clarity




A ± 0,38 (.015)	B ± 0,13 (.005)	C ± 0,13 (.005)	D ± 0,13 (.005)	E ± 0,38 (.015)	L ± 0,25 (.010)	W ± 0,41 (.016)	K ± 0,25 (.010)
66,93 (2.635)	52,81 (2.079)	61,11 (2.406)	11,07 (.436)	15,37 (.605)	0,99 (.039)	6,84 (.269)	1,52 (.060)

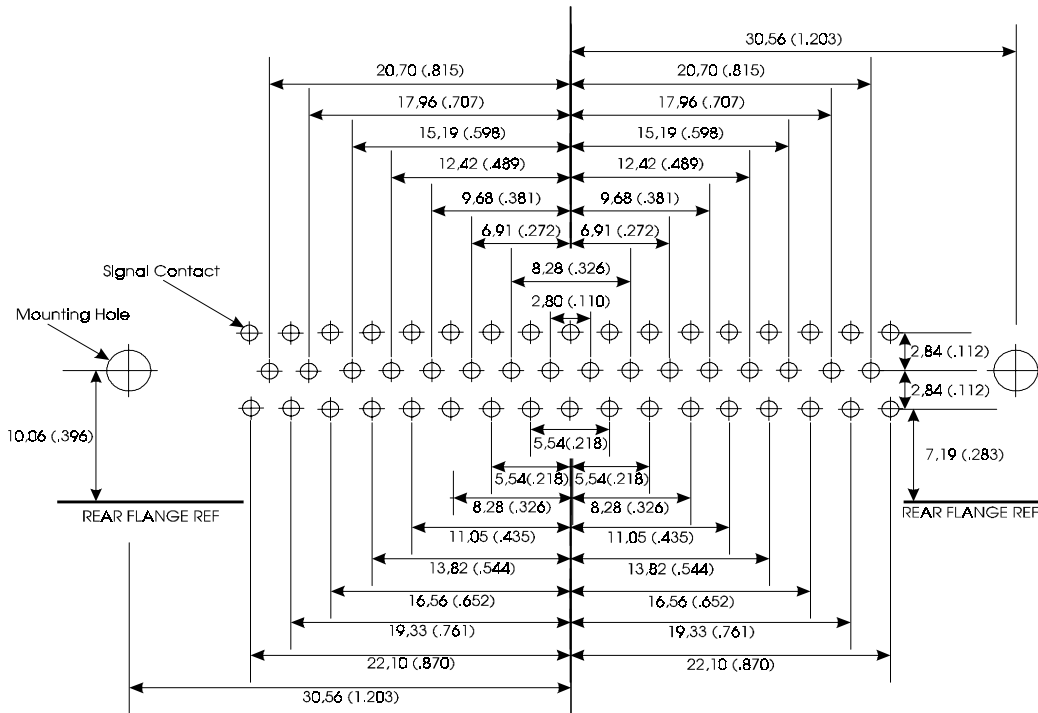

PCB mounting hole Ø (2)	PCB Signal cont Ø (50)
3.05 (.120) ± 0.05 (.002)	1.14 (.045)

NOTE: DO NOT MAKE ASSUMPTIONS REGARDING HOLE LOCATIONS, CHECK EACH DIMENSION

Right angle signal contacts

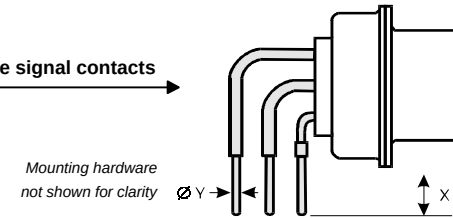

Signal contact diameter	Signal contact length from bottom of bracket
$Y \pm 0,04$ (.002)	$X \pm 0,69$ (.027)
0,76 (.030)	4,01 (.158)

DESCRIPTION	MATERIAL	FINISH	
Insulator	Polyester	None, (Color Dark Green)	
Shells	Steel	Yellow Chromate over Zinc	
Signal Contacts	Copper alloy	50 microinches Gold over Nickel	
Bracket	Thermo-plastic	None	
Unless otherwise specified, dimensions are in mm & (in.) Tolerances are (.XXX = mm) Decimals Angles .X ± 0,20 (.008) X° ± 1.0° .XX ± 0,10 (.004) .XXX ± 0,05 (.002)	Issue Date:	25-Aug-99	Cannon  ITT Industries
	CONNECTOR, PLUG, ELECTRICAL D-SUBMINIATURE 50 POSITION RIGHT ANGLE PCB		
	PART NO. DDMM50PL		