



actual size

Oscillator JT33(V) · (VC)TCXO

- Temp. Compensated Crystal Oscillator, 3.2 x 2.5 mm
- low power VCTCXO or TCXO
- temperature range -40 °C ~ +85 °C available
- ± 1.0 ppm stability available
- ceramic/metal package



RoHS compliant



Pb free



REACH
compliant



Conflict
mineral free

GENERAL DATA

TYPE		JT33 / JT33V
frequency range		8.0 ~ 52.0 MHz
frequency tolerance/stability	at +25°C	± 1.5 ppm (incl. 2x reflow)
	temperature	± 1 ppm ~ ± 5 ppm (table 1)
	aging first year	± 1 ppm
	supply voltage	± 0.2 ppm (at V_{DC} ±5%)
	load change	± 0.2 ppm
current consumption		2.5 mA max.
supply voltage V_{DC}		1.8 / 2.5 / 2.8 / 3.0 / 3.3 (±5%)
temperature	operating	see table 1
	storage	-40 °C ~ +85 °C
output	load nom.	10 KΩ // 10 pF
	level min.	0.8 Vpp (clipped sine)
external tuning range JT33V		±8 ppm min.
external tuning voltage JT33V		0.9 V ± 0.9 V at V_{DC} = 1.8 V (standard)
		1.5 V ± 1.0 V at V_{DC} ≥ 2.5 V (standard)
		1.4 V ± 1.0 V at V_{DC} ≥ 2.5 V (option)
start-up time max.		2.5 ms
phase noise	at 100 Hz	-109 dBc/Hz typ.
	at f_0	-133 dBc/Hz typ.
26 MHz	at 10 KHz	-148 dBc/Hz typ.

TABLE 1: FREQUENCY STABILITY VS. TEMPERATURE

operating temperature code	frequency stability code / ppm					
	Y	Z	A	B	C	D
A: -30°C ~ +80°C	○	○	○	○	○	○
B: -20°C ~ +70°C	○	○	○	○	○	○
C: -10°C ~ +60°C	○	○	○	○	○	○
D: 0°C ~ +85°C	○	○	○	○	○	○
E: 0°C ~ +55°C	○	○	○	○	○	○
F: -10°C ~ +70°C	○	○	○	○	○	○
G: -30°C ~ +75°C	○	○	○	○	○	○
H: -20°C ~ +75°C	○	○	○	○	○	○
K: -40°C ~ +85°C	○	○	○	○		
L: -20°C ~ +85°C	○	○	○	○	○	○
M: -30°C ~ +85°C	○	○	○	○		

○ on request

NOTE

- TCXO JT33: pin #1 connected to GND
- VCTCXO JT33V: pin #1 is control voltage V_C
- external AC coupling for output recommended

DIMENSIONS


top view	side view	bottom view	pad layout	TCXO JT33 # 1: GND # 2: GND # 3: output # 4: V_{DC}	VCTCXO JT33V # 1: Vcontrol # 2: GND # 3: output # 4: V_{DC}	pin connection	in mm
-----------------	------------------	--------------------	-------------------	--	--	----------------	-------

ORDER INFORMATION

0	frequency	type	frequency stability code	operating temp. code	supply voltage	control voltage (for JT33V only)
Oscillator	8.0 ~ 45.0 MHz	JT33 = TCXO JT33V = VCTCXO	A - Z see table 1	A - M see table 1	1.8 = 1.8 V 2.5 = 2.5 V 2.8 = 2.8 V 3.0 = 3.0 V 3.3 = 3.3 V	0.9 = V_C 0.9 V ± 0.9 V at V_{DC} = 1.8 V 1.5 = V_C 1.5 V ± 1.0 V at V_{DC} ≥ 2.5 V 1.4 = V_C 1.4 V ± 1.0 V at V_{DC} ≥ 2.5 V see General Data
Example: 0 26.0-JT33V-A-G-3.3-1.5-LF (Suffix LF = RoHS compliant / Pb free)						



Oscillator JT33(V) · (VC)TCXO

TAPING SPECIFICATION

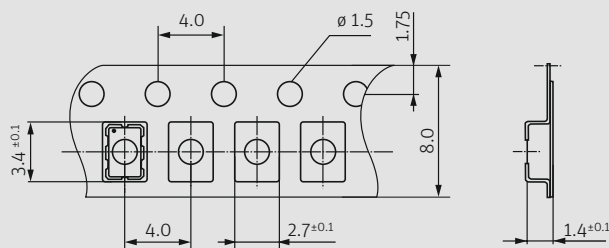


500 pcs per reel

Feeding



in mm

REFLOW SOLDERING PROFILE

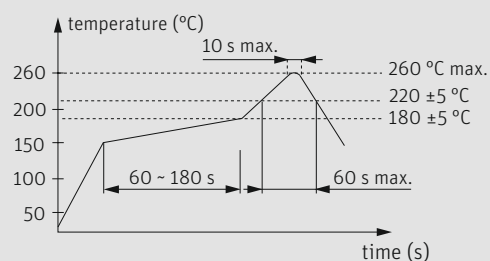

note: parts are also suitable for soldering systems with lead (Pb) content

MARKING

type / frequency

company code / date code

date code: A ~ M: Jan. - Dec.

7: 2017 8: 2018 9: 2019 0: 2020 1: 2021 2: 2022

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

PACKAGING NOTE

- standard packing unit is 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk