
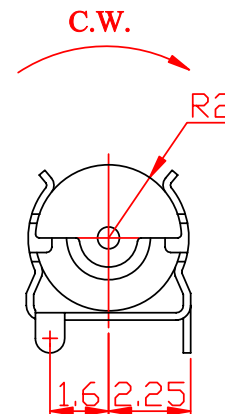
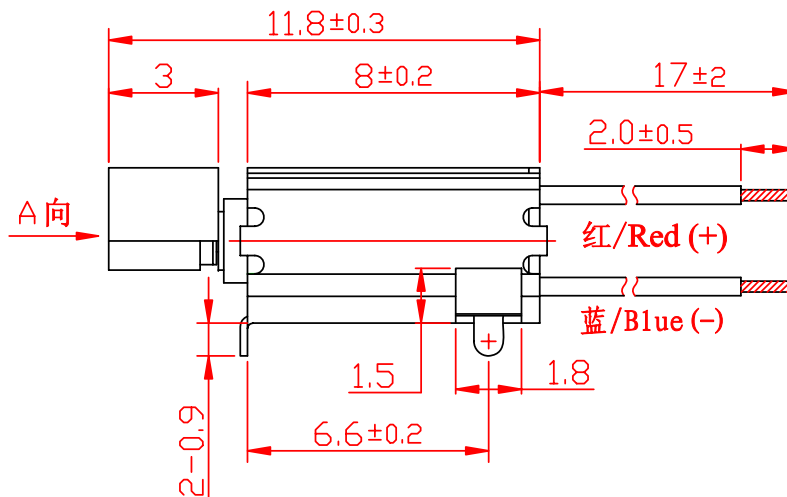
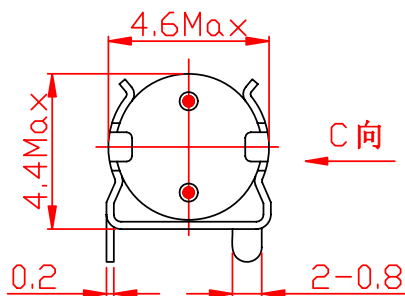
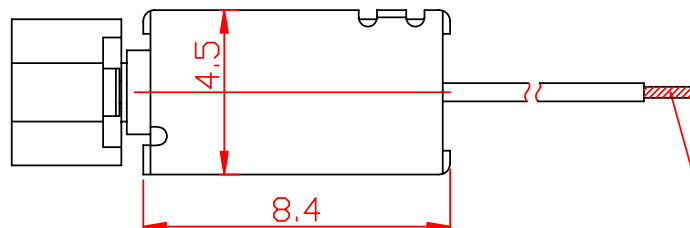


Z4TL2B03715452

C 向视图

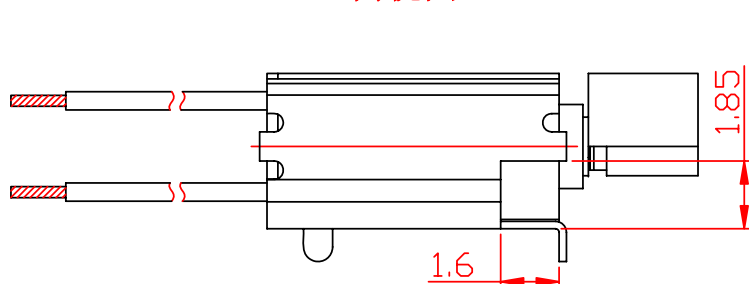

技术要求/Technical Requirements:

1. 额定电压/Rated voltage: 3.0V
2. 额定电流/Rated current: 30mA Max
3. 额定转速/Rated speed: 10,000 ± 2000rpm
4. 堵转电流/Stall current: 40mA Max
5. 端子阻抗/Terminal resistance: 93Ω(±20%)
6. 起动电压/Starting voltage: 2.4V Max
7. 轴向间隙/Shaft end play: 0.05~0.2mm
8. 导线规格/Lead wire spec: AWG32 UL3302
9. 所有尺寸为A向压紧后的尺寸(不包括轴向间隙)/ Overall length is measured after counterweight being pressed against body in direction A. (Shaft end play is not included.)
10. 未注线性公差为/Unmarked tolerance: ± 0.1mm

借 (通) 用件登记

底图总号

签 字

日 期

						jinlong-machinery.com				金龙机电股份有限公司					
														外 形 图	
标 记	处 数	分 区	更改文件号	签 名	日 期										
设 计			标准化			阶 段 标 记		重 量	比 例		Z4TL2B03715452				
校 对									5:1						
审 核															
工 艺			批 准			共 页		第 页							