
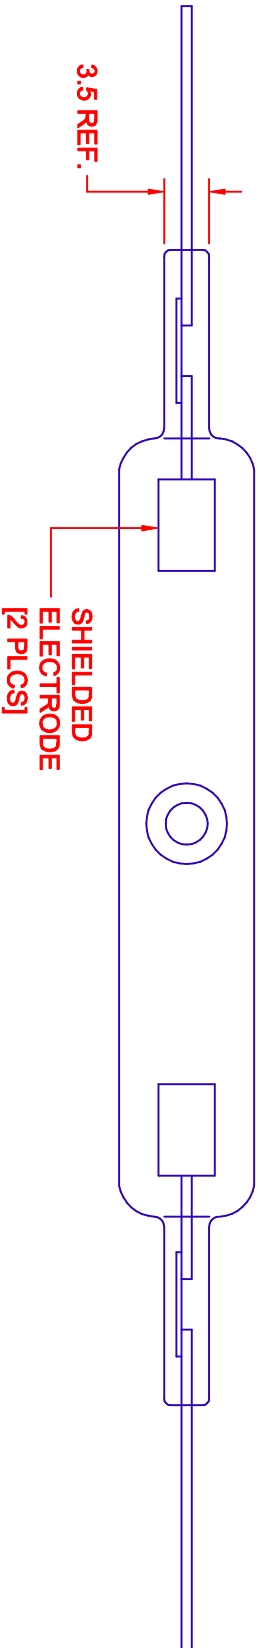


REV.	DESCRIPTION/ECO NO.	DATE
	RELEASE & CANCEL P-0312-10	3/1/04

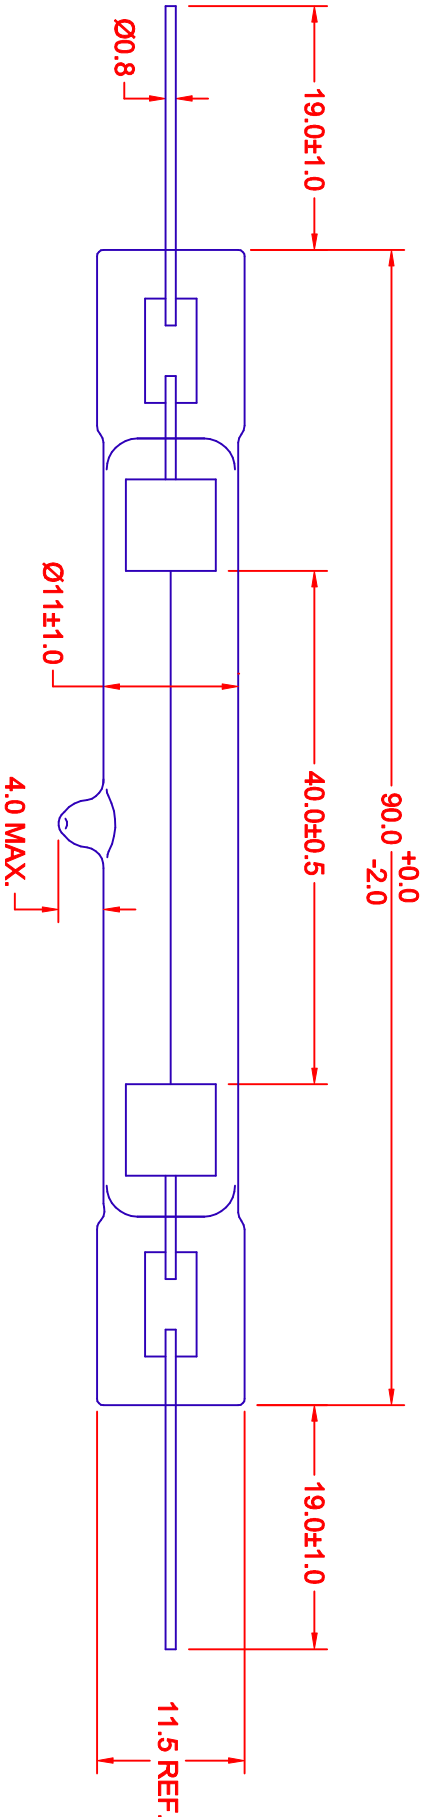

VOLTS OPERATING: 160 Vrms
 CURRENT OPERATING: 10 mArms
 LAMP WATTS: 1.6
 STARTING VOLTS 25 C: 400 TYP.
 STARTING VOLTS 0 C: 600 TYP.
 WAVE LENGTH PEAK: 253.7 nm
 LAMP OUTPUT: 85 uW/cm2 @ 1" (25.4mm)
 TOTAL OUTPUT FLUX: 4000 uW TYP.
 LIFE HOURS TO 50% OF OUTPUT SPEC.: 20,000

METRIC	DIMENSIONS ARE IN MILLIMETERS	TITLE
 THIRD ANGLE PROJECTION	TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- REF. 2 PL +/- 0	JKL COMPONENTS CORPORATION SHIELDED ELECTRODE ULTRAVIOLET LAMP
DRAWN BY L. WENGSTROM	APP'D BY J.K.	DATE 3/1/04
- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED	SIZE A	FSC# NO. 55335
	SCALE NONE	DRAWING NO. BF1190-UV/C/1
	RELEASED DATE 3/1/04	REVISION DATE REV. NO. 1 OF 1