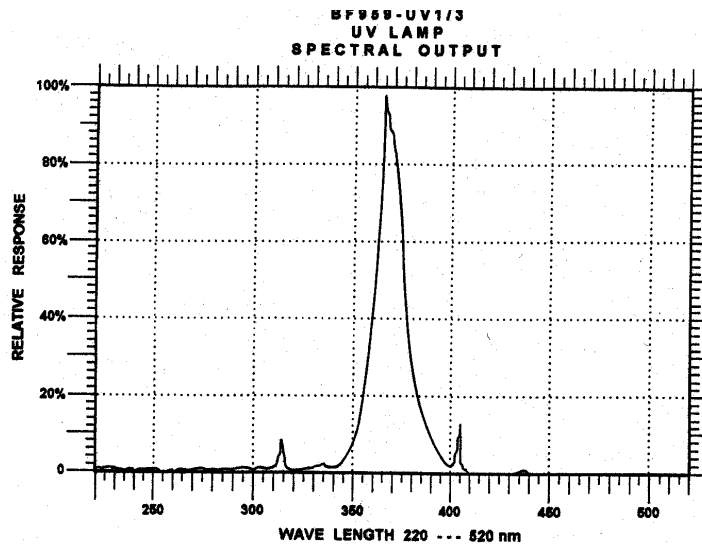


JKL PART NUMBER	LENGTH (A) +/- 2mm	LAMP WATTS	STARTING VOLTAGE VS (Vrms)	OPERATING VOLTAGE VL (Vrms)	OPERATING CURRENT IL (mAmps)	OUTPUT Uw/CM2 @1"	*RATED LIFE (HRS)
BF325-UV1	25mm	0.35	350	140	2.5	.20	8,000
		0.70	350	140	5.0	.30	5,000
BF350-UV1	50mm	0.49	500	195	2.5	.20	10,000
		0.98	500	195	5.0	.30	6,000
BF366-UV1	66mm	0.54	550	215	2.5	.20	10,000
		1.10	550	215	5.0	.30	6,000
BF3100-UV1	100mm	1.30	650	260	5.0	.25	10,000
BF3120-UV1	120mm	1.40	700	280	5.0	.25	10,000
BF3130-UV1	130mm	1.50	720	300	5.0	.25	10,000
BF3150-UV1	150mm	1.68	750	335	5.0	.25	10,000
BF3221-UV1	221mm	2.25	1075	450	5.0	.25	10,000
BF3237-UV1	237mm	2.50	1150	500	5.0	.25	10,000
BF3240-UV1	240mm	2.50	1150	500	5.0	.25	10,000

*NOTE: RATED LIFE IS DEFINED AS THE POINT AT WHICH THE OUTPUT BECOMES 50% OF THE INITIAL RATING.

ALL SPECIFICATIONS ARE TYPICAL WITH THE LAMP OPERATING AFTER STABILIZATION, AT AN AMBIENT TEMPERATURE OF 25°C.

			METRIC	DIMENSIONS ARE IN MILLIMETERS		JKL COMPONENTS CORPORATION						
				TOLERANCE UNLESS OTHERWISE SPECIFIED		TITLE						
				1 PL +/- 0.2 2 PL +/- 0.20 ANGLE +/- 0		MINIATURE 3.2mm 365nm UV-CCFL						
E	ADD PART NUMBER BF3221-UV1	6/18/03	THIRD ANGLE PROJECTION	DRAWN BY	APP'VD BY DATE	SIZE	FSCM NO.	DRAWING NO.	BF 3-UV1			
D	ADD PART NUMBER BF3237-UV1	4/7/00		L. WENGSTROM	F.D. 6/18/03	A	55335					
C	ADD PART NUMBER BF366-UV1	8/20/99		RELEASED - CANCEL ALL BF-3mm Ø UV1 DRAW'S					6/3/98			
B	CORRECT OUTPUT POWER	3/1/99	- CAD DRAWING -					SCALE	RELEASED DATE	REVISION DATE	REV. NO.	SHEET
A	ADD BF3130-UV1	11/11/98	MANUAL REVISIONS NOT PERMITTED					NONE	6/3/98	6/18/03	E	1 OF 1