
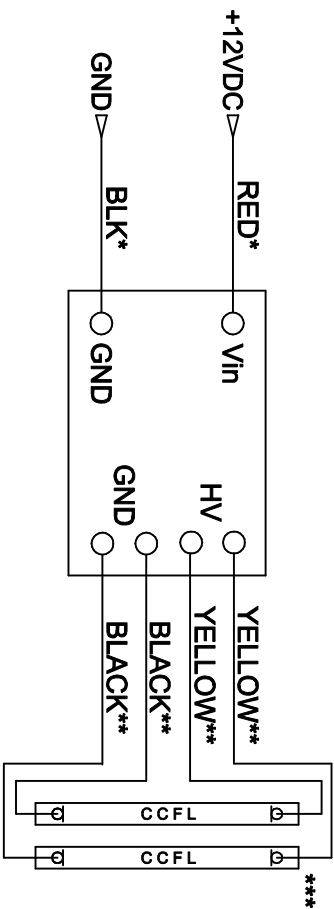
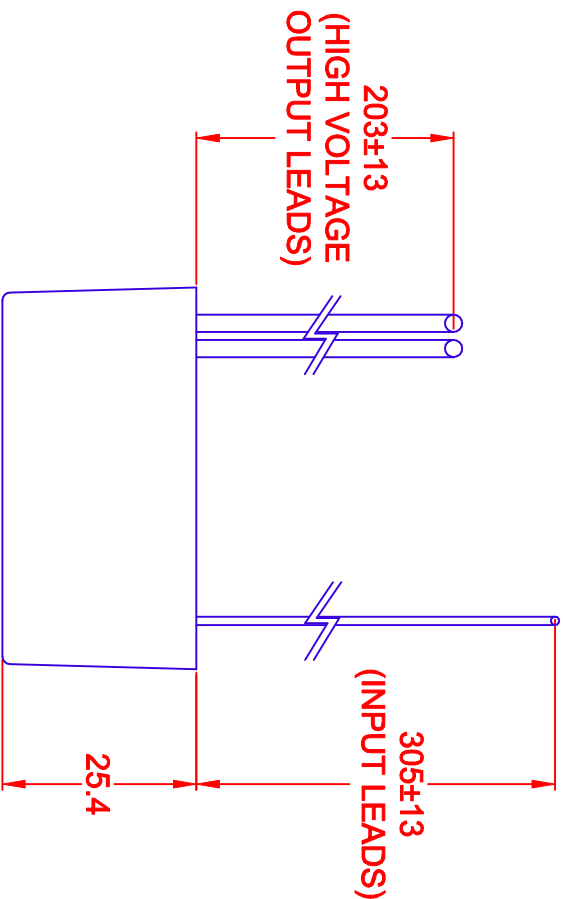


REV.	DESCRIPTION/ECO NO.	DATE
A	PROD. RELEASED	11/4/98
B	WIRE DESIGN PLACEMENT CORRECT.	12/9/03

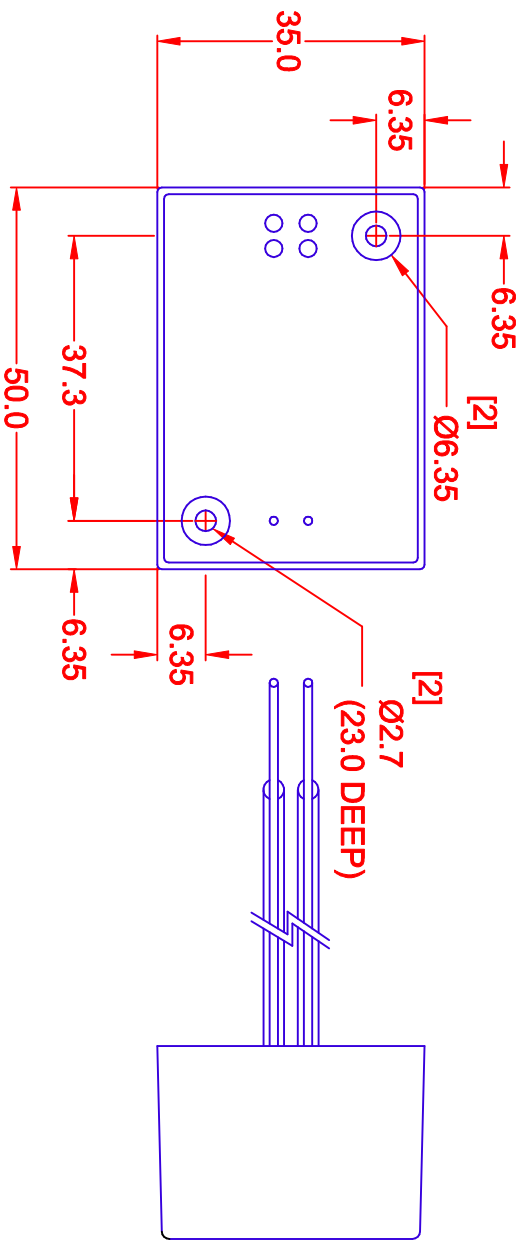

* REVERSE POLARITY TO INVERTER INPUT WILL CAUSE AN OPEN CIRCUIT IN INTERNAL FUSE.

** WIRE SIZE 22 AWG, SOFT FLEXIBLE PVC INDULATION NOMINAL O.D. 2.3mm TEMPERATURE RANGE -80 TO +105 C.

*** REFERENCE DRAWING BXA-12529 FOR SINGLE LAMP OPERATION.

OPERATING SPECIFICATIONS

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (Vdc)	10.0	12.0	13.2
INPUT CURRENT: (mA)	200	260	500
OUTPUT VOLTAGE: (Vrms)	950	1000	1050
OUTPUT CURRENT 2 X (mA)	4.5	5.5	6.5
OUTPUT FREQUENCY: (kHz)	25	35	45
OPERATING TEMP: (CELSIUS)	0	25	50

METRIC 	DIMENSIONS ARE IN MILLIMETERS		TOLERANCE UNLESS OTHERWISE SPECIFIED	
	1 PL +/-	0.5	2 PL +/-	0.3
THIRD ANGLE PROJECTION	ANGLE +/-	0		
DRAWN BY L. WENGSTROM	APPRD BY J.K.	DATE 12/9/03	SIZE A	FIG. NO. 55335
- CAD DRAWING -		RELEASED DATE 11/4/98	REVISION DATE 12/9/03	REV. NO. B
MANUAL REVISIONS NOT PERMITTED		SHEET 1 OF 1		

JKL COMPONENTS CORPORATION

12 VDC INPUT, DUAL OUTPUT, ENCAPSULATED CCFL INVERTER

AXA-12529/PS1