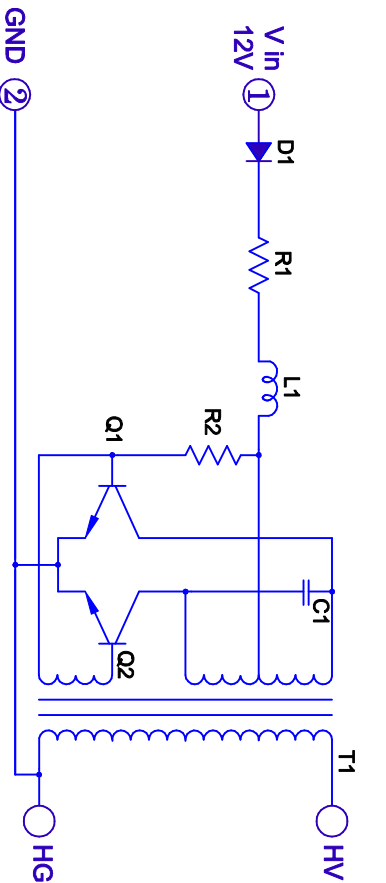
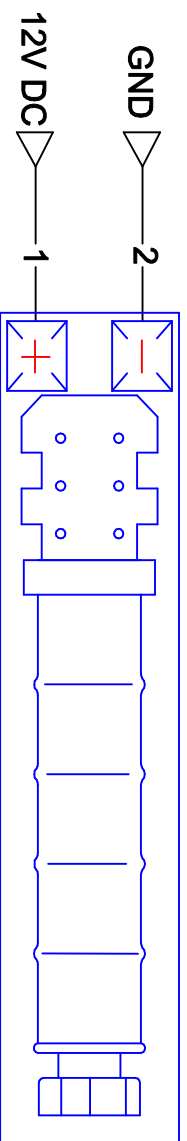
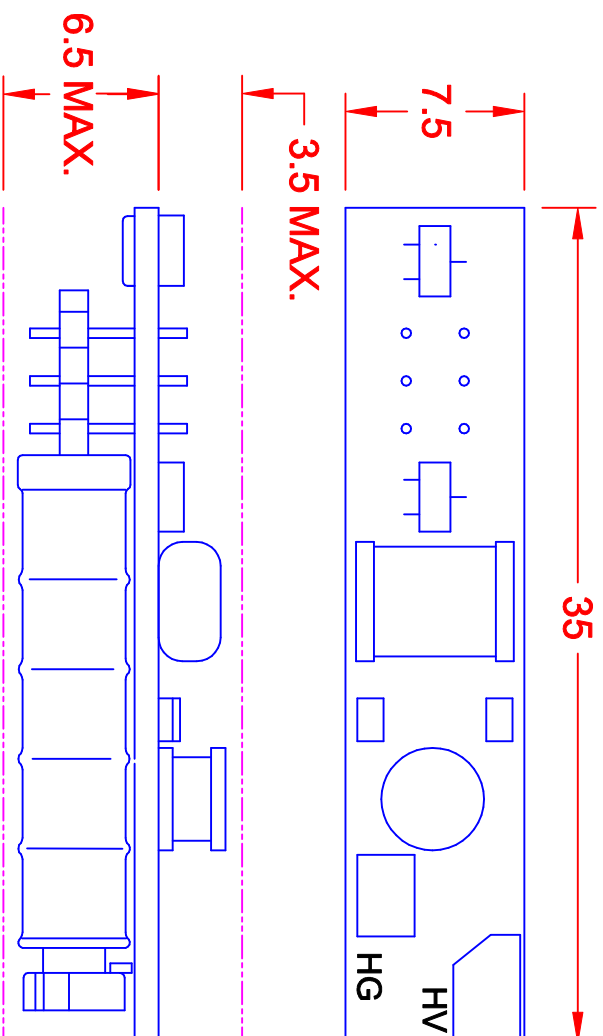



TOLERANCE	
$L < 20$	± 0.2
$20 \leq L < 50$	± 0.3
$50 \leq L < 100$	± 0.4
$100 \leq L$	± 0.5

REV.	DESCRIPTION/ECO NO.	DATE
	RELEASED AS CAD DRW.	9/25/01

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (Vdc)	10.0	12.0	15.0
INPUT CURRENT: (mA)	130	150	170
OUTPUT VOLTAGE: (Vrms)	700	800	900
OUTPUT CURRENT (maRms)	3.0	4.0	5.0
OUTPUT FREQUENCY: (kHz)	85	105	125
OPERATING TEMP: (CELSIUS)	0	25	50

BOARD PIN #	INPUT	
1	+V (V in)	M1 - INPUT CURRENT (I in)
2	V (GND)	M2 - INPUT VOLTAGE (V in)
HV	V OUT	M3 - OUTPUT CURRENT (I out)
HG	OUT GND	M4 - OUTPUT VOLTAGE (V out)

METRIC	DIMENSIONS ARE		JKL COMPONENTS CORPORATION												
	IN MILLIMETERS														
 THIRD ANGLE PROJECTION	TOLERANCE UNLESS OTHERWISE SPECIFIED		TITLE 12V CCFL POWER SUPPLY												
	1 PL +/- 0.2														
	2 PL +/- ANGLE +/- 0														
DRAWN BY L. WENGSTROM	APP'D BY F.D.	DATE 9/25/01	SIZE A	FSCM NO. 55335	DRAWING NO. BXA-12577						SCALE NONE	RELEASED DATE 9/25/01	REVISION DATE	REV. NO.	SHEET OF
- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED															