

ANISSEI ARCOTRONICS

METALLIZED POLYPROPYLENE FILM CAPACITOR

SHELF-HEALING PROPERTIES

Type **R46**

Features

- For interference suppression, <across-the-line>
- Light and small in size
- CLASS X2

Specifications

Temp range	-40 to +110°C	
Voltage	275V.a.c, 50/60Hz	
Capacitance	0.010 to 5.6μF(E-6)	
Cap. tolerance	±20%(M)	
Tangent of loss angle	0.01 or less (at 25°C ±5°C 1kHz)	
Withstand voltage	Between terminals	1500V.a.c 1s + 2200V.d.c 1s (at 25°C ±5°C 1kHz)
	Between terminal and case	2500V.a.c 60s
Insulation resistance	C≤0.33μF 100,000MΩ or more C>0.33μF 30,000ΩF or more	
Impulse voltage	EN132400; IEC 60384-14 amendment A1:1995 2nd Ed.'93(EN 132400)PV≤2.5kV	

Approvals

	ENEC IEC 60384-14	Class X2	File No.V4413
	CAN/CSA E384-14-95	Across-the-line	File No.1271537 (LR83890)
	UL 1414 (up to 1μF)	Across-the-line	File No.E97797
	UL 1283 (310V.a.c)	Class X2	File No.E85238
	GB/T 14472-1998 (275V.a.c)	Class X2	File CQC3001008199

UL 1414 for 250V.a.c only.

Approved according to IEC 60384-14: 1993+A1: 1995
(EN132400: 1994+A2: 1998+A3: 1998+A4: 2001).

According to IEC 60065.


(**) ENEC mark has replaced all the following European National marks:




Dimensions(mm)

Lead/Taping configuration	Lead length (mm)	Taping style			Lead/Taping Configuration code
		P2(mm)	Fig.(No.)	Pitch(mm)	
Ammo-pack		12.70	1	10.0/15.0	DQ
Ammo-pack		19.05	2	22.5	DQ
Loose, short leads	4+0.5				JP
Loose, long leads	25-1/+2				55
	30+5				45

Loose



Taped

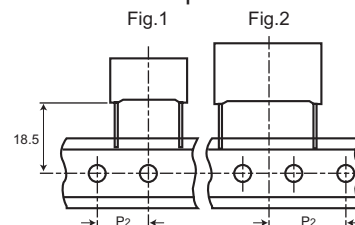

- Specifications of products, materials and other contents stated in the catalog are subject to change without notice.
- When using our capacitors, please consider the application contact Nissei for the any additional technical specifications relating to the limits of our performance characteristics.

ANISSEI ARCOTRONICS

METALLIZED POLYPROPYLENE FILM CAPACITOR

SHELF-HEALING PROPERTIES

Type **R46**

Dimensions(mm)

Type R46	Rated Cap(*)	275 V.a.c					Max dv/dt at 390V.d.c(V/ μ s)	Parts number	Loose (pcs./Box)	
		B $\pm$ 0.2	H $\pm$ 0.2/-0.3	L $\pm$ 0.5	P $\pm$ 0.4	ϕ d $\pm$ 0.05			Short leads	Long leads
103	0.010 μ F	4.0	9.0	13.0	10.0	0.6	500	R46 KF 2100 — N0 M	2000	1800
153	0.015 μ F	4.0	9.0	13.0	10.0	0.6	500	R46 KF 2150 — N0 M	2000	1800
223	0.022 μ F	4.0	9.0	13.0	10.0	0.6	500	R46 KF 2220 — N0 M	2000	1800
333	0.033 μ F	5.0	11.0	13.0	10.0	0.6	500	R46 KF 2330 — M1 M	1300	1500
473	0.047 μ F	5.0	11.0	13.0	10.0	0.6	500	R46 KF 2470 — N0 M	1300	1500
683	0.068 μ F	6.0	12.0	13.0	10.0	0.6	500	R46 KF 2680 — M1 M	1000	1200
104	0.1 μ F	6.0	12.0	13.0	10.0	0.6	500	R46 KF 3100 — M1 (M)	1000	1200
103	0.010 μ F	5.0	11.0	18.0	15.0	0.6	400	R46 KI 2100 — 01 M	2000	1000
153	0.015 μ F	5.0	11.0	18.0	15.0	0.6	400	R46 KI 2150 — 01 M	2000	1000
223	0.022 μ F	5.0	11.0	18.0	15.0	0.6	400	R46 KI 2220 — 01 M	2000	1000
333	0.033 μ F	5.0	11.0	18.0	15.0	0.6	400	R46 KI 2330 — 01 M	2000	1000
473	0.047 μ F	5.0	11.0	18.0	15.0	0.6	400	R46 KI 2470 — 01 M	2000	1000
683	0.068 μ F	5.0	11.0	18.0	15.0	0.6	400	R46 KI 2680 — 01 M	2000	1000
104	0.10 μ F	5.0	11.0	18.0	15.0	0.6	400	R46 KI 3100 — M1 M	2000	1000
154	0.15 μ F	7.5	13.5	18.0	15.0	0.6	400	R46 KI 3150 — M2 M	1750	900
224	0.22 μ F	7.5	13.5	18.0	15.0	0.6	400	R46 KI 3220 — M2 M	1000	700
334	0.33 μ F	8.5	14.5	18.0	15.0	0.6	400	R46 KI 3330 — N0 (M)	1000	500
474	0.47 μ F	10.0	16.0	18.0	15.0	0.8	400	R46 KI 3470 — N0 (M)	750	500
564	0.56 μ F	11.0	19.0	18.0	15.0	0.8	400	R46 KI 3560 — N0 M	450	350
604	0.60 μ F	11.0	19.0	18.0	15.0	0.8	400	R46 KI 3600 — N0 (M)	450	350
154	0.15 μ F	6.0	15.0	26.5	22.5	0.8	200	R46 KN 3150 — 01 M	805	500
224	0.22 μ F	6.0	15.0	26.5	22.5	0.8	200	R46 KN 3220 — M1 M	805	500
334	0.33 μ F	6.0	15.0	26.5	22.5	0.8	200	R46 KN 3330 — N0 M	805	500
474	0.47 μ F	7.0	16.0	26.5	22.5	0.8	200	R46 KN 3470 — N0 M	700	500
684	0.68 μ F	10.0	18.5	26.5	22.5	0.8	200	R46 KN 3680 — M2 M	396	300
105	1.0 μ F	10.0	18.5	26.5	22.5	0.8	200	R46 KN 4100 — N2 (M)	396	300
474	0.47 μ F	9.0	17.0	32.0	27.5	0.8	150	R46 KR 3470 — 01 M	816	408
684	0.68 μ F	9.0	17.0	32.0	27.5	0.8	150	R46 KR 3680 — M1 M	816	408
105	1.0 μ F	11.0	20.0	32.0	27.5	0.8	150	R46 KR 4100 — M1 M	560	336
155	1.5 μ F	13.0	22.0	32.0	27.5	0.8	150	R46 KR 4150 — M1 M	480	288
225	2.2 μ F	14.0	28.0	32.0	27.5	0.8	150	R46 KR 4220 — M1 M	352	176
335	3.3 μ F	18.0	33.0	32.0	27.5	0.8	150	R46 KR 4330 — M2 M	256	128
475	4.7 μ F	22.0	37.0	32.0	27.5	0.8	150	R46 KR 4470 — M1 M	168	112
225	2.2 μ F	13.0	24.0	41.5	37.5	1.0	100	R46 KW 4220 — M1 M	360	216
335	3.3 μ F	16.0	28.5	41.5	37.5	1.0	100	R46 KW 4330 — M1 M	216	108
475	4.7 μ F	19.0	32.0	41.5	37.5	1.0	100	R46 KW 4470 — M1 M	192	96
565	5.6 μ F	20.0	40.0	41.5	37.5	1.0	100	R46 KW 4560 — M1 (M)	126	84
685	6.8 μ F	24.0	44.0	41.5	37.5	1.0	100	R46 KW 4680 — M1 M	108	72
106	10.0 μ F	30.0	45.0	41.5	37.5	1.0	100	R46 KW 5100 — M1 M	90	60

Rated voltage (K=275Vac)

Mechanical version and packaging (Table 1)

Tolerance: M ($\pm$ 20%)

- Specifications of products, materials and other contents stated in the catalog are subject to change without notice.
- When using our capacitors, please consider the application contact Nissei for the any additional technical specifications relating to the limits of our performance characteristics.