


Capacitor, film, 0.68 uF, +/-5% Tol, -55/+105C, General Purpose, 250V@85C, Lead Spacing=15 mm

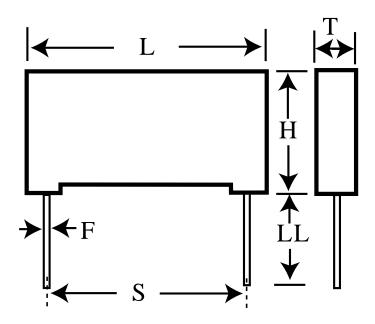

## **Dimensions (mm)**

## **Specifications**

ID L H T S LL F	Dimension 18 14.5 8.5 15 30 0.8	<b>Tolerance</b> +0.5 +0.1 +0.2 +/-0.4 +5 +/-0.05	Manufacturer: Capacitance: Temperature Range: Rated Temperature: Voltage @ rated temp: Voltage AC: Tolerance: Body Type: Construction: Application: Sub Application: Dissipation Factor @ 1 kHz: Dissipation Resistance:	KEMET 0.68 uF -55/+105C 85C 250V 160VAC +/-5% Radial Box Wound General Purpose Pulse 0.05% 0.08% 44.12 GOhm
			•	
			Insulation Resistance: Inductance: Maximum dVdT:	44.12 GOhm 10 nH 300v/us
			Maximum K0: Package Kind:	100000V^2/us Bulk
			Package Type: Package Quantity:	Bag 500

