


Varistors, VP, Plastic Encapsulated, 200 V, 150 VAC, 240 V, 395 V, 10 A, 1.2 kA, 18.5 J, 250 mW

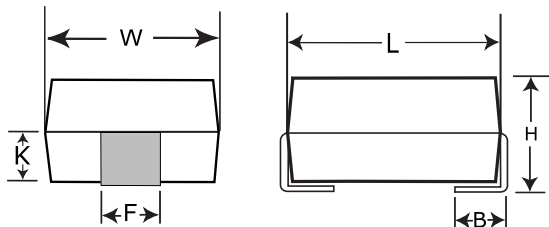

General Information	
Type:	Varistors
Style:	SMD Molded
Series:	VP
Description:	Surface Mount Varistors
Features:	Plastic Encapsulated
Termination:	Nickel Tin
RoHS:	Yes
Approvals:	UL

Dimensions	
Chip Size	4032
L	10mm +/-0.5mm
W	8mm +/-0.4mm
H	4.7mm +/-0.3mm
F	3mm +/-0.3mm
B	1.5mm +/-0.3mm
K	2.3mm +/-0.3mm

Specifications	
Voltage DC:	200 VDC (25C)
Voltage AC:	150 VAC
Temperature Range:	-40/+85C
Storage Temperature Range:	-40/+125C
Varistor Voltage:	240 VDC at 1 mAmps
Clamping Voltage:	395 V
Clamping Current:	10 Amps (8/20 us MAX)
Surge Current:	1200 Amps (8/20 us MAX)
Energy:	18.5 J (10/1000 us MAX)
Capacitance:	280 pf (1kHz)

Packaging Specifications	
Packaging:	T&R
Packaging Quantity:	1000