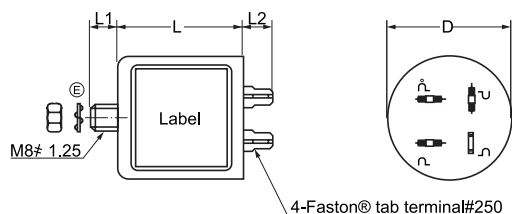


KEMET, VU, EMI/RFI Filters, Noise Suppression, 250 VAC, 250 V, 20 A

**Dimensions**

D	50mm NOM
L	50mm NOM
L1	12mm NOM
L2	12mm NOM
Lead	Threaded Studs M8

Packaging Specifications

Packaging:	Tray, Box
Packaging Quantity:	25
Weight:	240 g

General Information

Series:	VU
Style:	Metal Cylinder
Description:	Noise Filters
RoHS:	Yes
Qualifications:	UL, CSA, TUV
Miscellaneous:	40 K Self-Temperature Rise Max.
Lead:	Threaded Studs M8

Specifications

Voltage AC:	250 VAC
Ripple Current:	20 A (AC/DC)
Temperature Range:	-25/+55°C
Voltage:	250 VDC, 1500 VAC Withstanding Voltage 1 Min. Line to Ground
Leakage Current:	1 mA MAX (250 V 60 Hz)
Resistance:	300 MOhms MIN Insulation 500 VDC 1 Min. Line To Ground