

"AUTO" FUSE CLIPS & HOLDERS

- Available for **standard** and **mini** blade fuses
- Thru hole PC mountable, maintains position during wave soldering
- Space saving, low profile designs

- Horizontal and vertical **mini** blade clip for Littelfuse ATO 297 series and Bussmann ATM fuses
- Withstands the rigors of shock and vibration

- Horizontal and vertical **standard** blade clips for Littelfuse ATO 257 series and Bussmann ATC fuses
- Holds fuses securely, even after multiple insertions

- Orientation legs assure proper PC installation

Voltage Rating: 500VAC

Current Rating: 30 Amps or as noted

PC AUTOMOTIVE BLADE FUSE CLIPS


FOR .205 x .025 STANDARD BLADE FUSES





.016 Brass, Nickel Plate

Current Rating: 40 Amps

CAT. NO. 3522 - Vertical

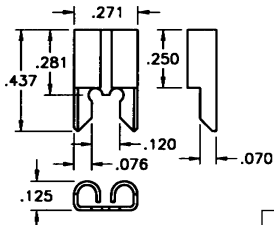


Mounting Detail For Two Clips




.012 Brass, Nickel Plate

Current Rating: 40 Amps

CAT. NO. 3550 - Horizontal

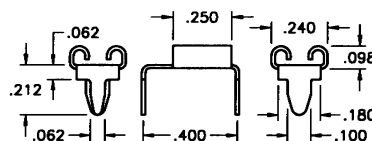

Mounting Detail For Two Clips




FOR .110 x .032 MINI BLADE FUSES





.016 Brass, Nickel Plate

- Low Profile

CAT. NO. 3564 - Vertical

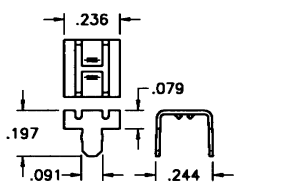


Mounting Detail For Two Clips





.012 Brass, Nickel Plate

CAT. NO. 3544 - Vertical




Mounting Detail For Two Clips




.012 Brass, Nickel Plate

CAT. NO. 3549 - Horizontal



Mounting Detail For Two Clips



PC AUTOMOTIVE BLADE FUSE HOLDERS

- Thru hole PC mountable, maintains position during wave soldering
- Holder design prevents solder wicking
- Withstands the rigors of shock and vibration
- Holds fuse securely, even after multiple insertions
- Suitable for 40 Amp applications

SPECIFICATIONS

Contacts: Brass, Nickel Plate; **Insulator:** Glass Filled Nylon, UL Rated 94V-0


Current Rating: 30 Amps; **Voltage Rating:** 500VAC

Temperature Rating: -58°F to +292°F (-50°C to +145°C)


FOR .205 x .025 STANDARD BLADE FUSES



CAT. NO. 3522-2




Mounting Detail




FOR .110 x .032 MINI BLADE FUSES




CAT. NO. 3544-2



Mounting Detail



MODULAR PC AUTOMOTIVE BLADE FUSE HOLDER



CAT. NO. 3560


- Designed for standard auto blade fuses
- Fully insulated compact design
- Mounts easily in pre-drilled or punched hole
- Holder has pocket to hold spare fuse
- Safety lever release clip will not open under shock or vibration
- Fuses are installed and removed easily
- May be used individually or easily interlocked for multiple mounting

SPECIFICATIONS


Contacts: Brass, Tin Plate **Body:** Nylon, UL Rated 94V-0

Dielectric Strength: (60 seconds) 1500VAC/min.

Current Rating: 30 Amps

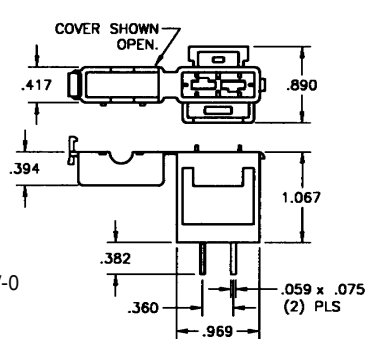

Mounting Detail



Mounting Detail For Two Holders

