




FRONT SHELL

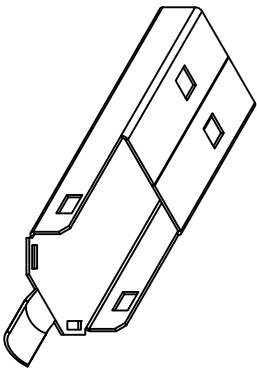








INSERTED BODY

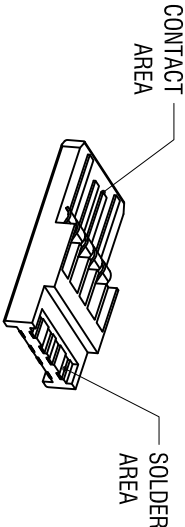

REAR SHELL



ASSEMBLED PLUG

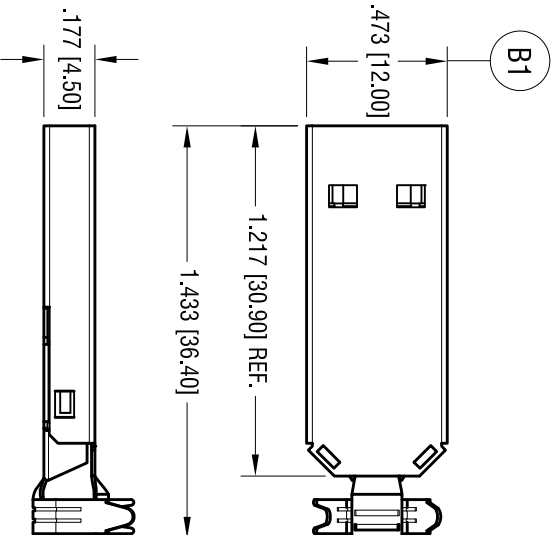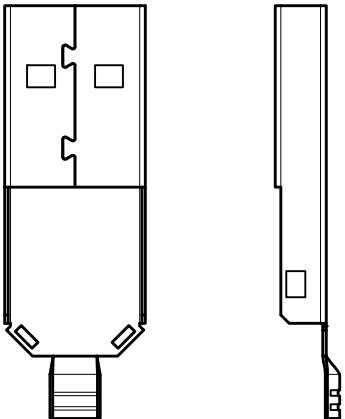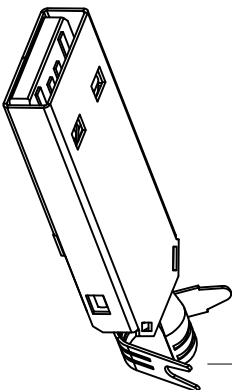

PLUG SPECIFICATIONS:

- SHELL: MAT'L- STEEL
- FINISH- NICKEL PLATE
- INSULATION: MAT'L- THERMOPLASTIC, UL 94V-0 (COLOR- BLUE)
- CONTACT: MAT'L- PHOSPHOR BRONZE ON SOLDER AREA
- FINISH- TIN PLATE, OVER NICKEL ON CONTACT AREA
- FINISH- GOLD FLASH OVER NICKEL

- ELECTRICAL CHARACTERISTICS:
- RATED VOLTAGE: 30V (RMS)
- CONTACT CURRENT RATING: 1 Amp DC MAX.
- CONTACT RESISTANCE: 15m Ω min.
- DIELECTRIC WITHSTANDING VOLTAGE: 750V AC FOR 1 MINUTE
- MECHANICAL CHARACTERISTICS:
- OPERATING TEMPERATURE: -13°F (-25°C) TO 176°F (+80°C)
- DURABILITY: 1500 CYCLES MIN.

THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

KEYSTONE ELECTRONICS CORP. www.keyeico.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500			
PART NAME			
USB 3.0 TYPE A PLUG KIT			
MATERIAL			
AS NOTED			
FINISH			
AS NOTED		DRN BY	DATE
		NT	4.07.10
		App'D	SCALE
		RH	1.5X
TOLERANCES		CODE	DWG NO.
DECIMAL $\pm .010$ [± 0.25]		C	947
ANGULAR $\pm 1^\circ$			
UNLESS OTHERWISE SPECIFIED			