

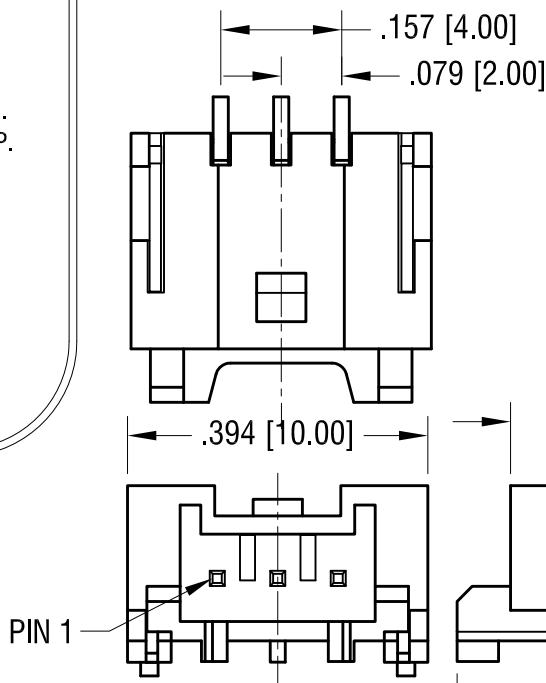


THIS DOCUMENT IS THE PROPERTY OF
KEYSTONE ELECTRONICS CORP. AND
SHALL NOT BE REPRODUCED, DISTRIBUTED
OR USED AS A BASIS FOR MANUFACTURE
WITHOUT PRIOR WRITTEN PERMISSION
FROM KEYSTONE ELECTRONICS CORP.

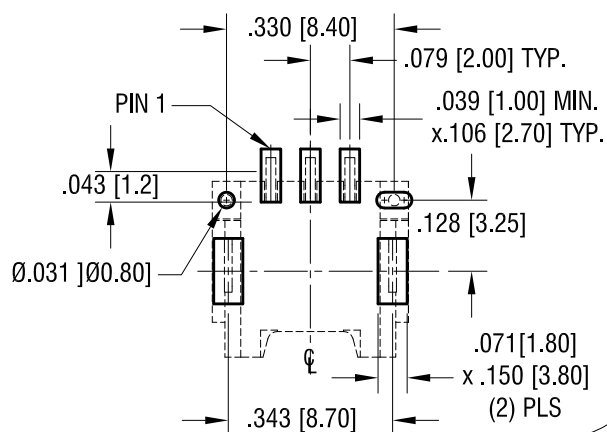


ACTUAL SIZE



NOTE:

1. INSULATION: MAT'L- PA6T, UL94V-0
2. POST: MAT'L- COPPER ALLOY
TIN PLATED

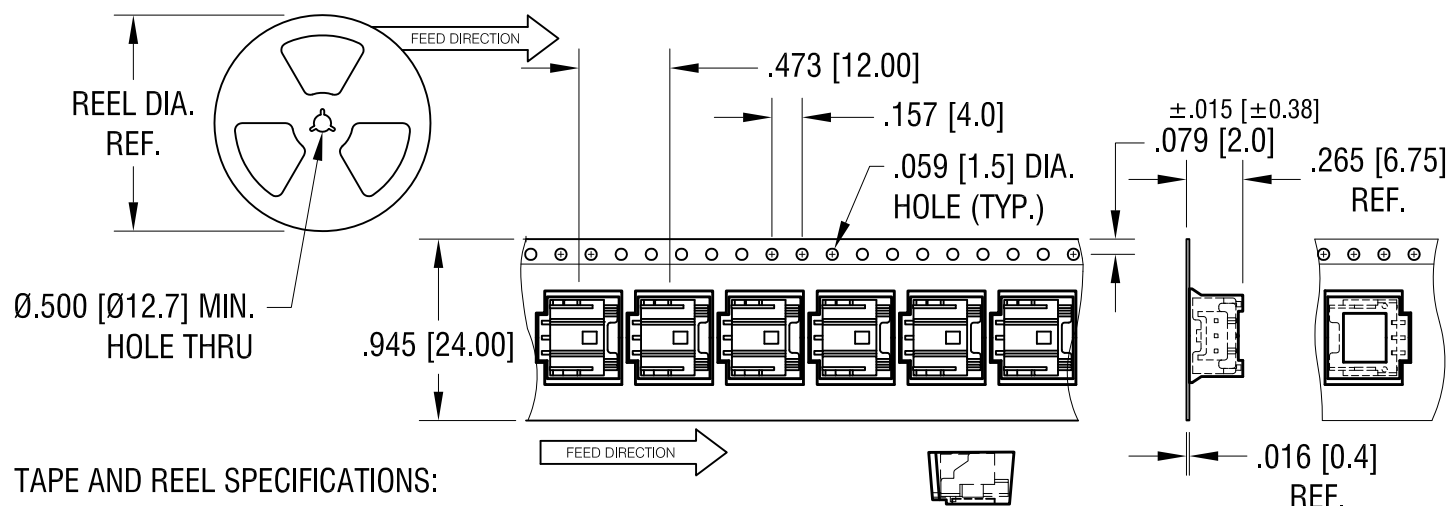

TAPE AND REEL SPECIFICATIONS:

4. TAPE: MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER
ANSI/EIA-481 STANDARD
5. REEL: 15.0 [380.8] DIA. 1000 PIECES PER REEL

KEYSTONE ELECTRONICS CORP.

www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500

PART NAME

SM SIDE ENTRY CONNECTOR (3 CIRCUITS)

MATERIAL

AS NOTED

FINISH

AS NOTED

DRN BY

NT

DATE

3.07.16

APP'D

RH

SCALE

4X

TOLERANCES

INCH [MM]

DECIMAL

± .005 [± 0.13]

ANGULAR

± 1°

UNLESS OTHERWISE SPECIFIED

CODE

C

DWG NO.

976

DATE

DESCRIPTION

REV.