

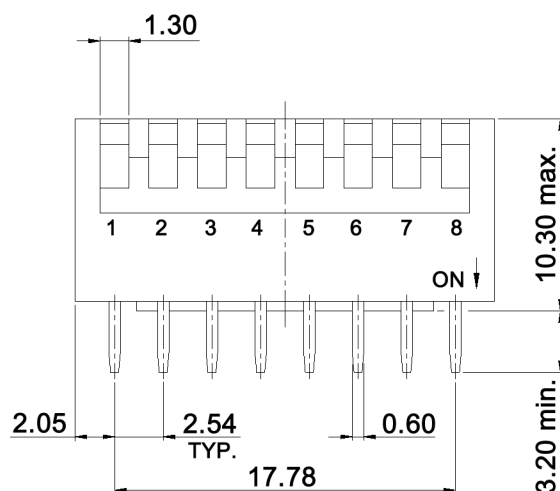
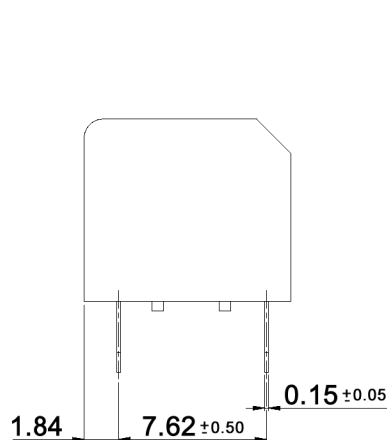


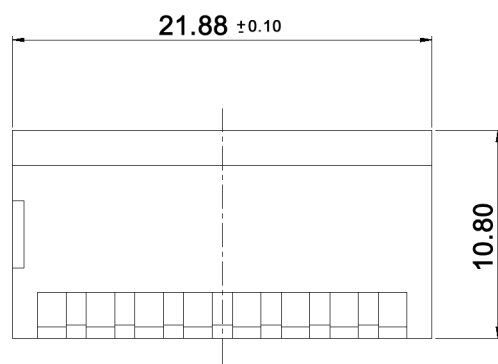

P.C.B. LAYOUT

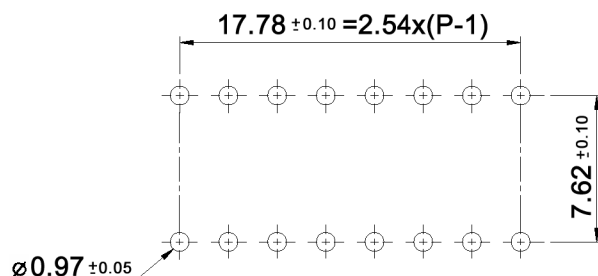


Specifications:

Contact rating:	non-switching: 100mA, 50V DC switching: 25mA, 24V DC
Contact resistance:	50mOhm max.
Insulation resistance:	100MOhm min. at 500V DC
Dielectric strength:	500V AC for 1 minute
Operating temperature:	-20°C to +70°C
Storage temperature:	-40°C to +85°C
Mechanical life:	2 000 cycles
Electrical life:	2 000 cycles per switch 24V DC, 25mA
Operating force:	400gf max.
Soldering conditions:	wave soldering: 260°C max., 5sec.
Material:	Base: UL94V-0 PBT thermoplastic, black Cover: UL94V-0 PBT thermoplastic, red Actuator: UL94V-0 PBT thermoplastic, white Contact: phosphor bronze, gold plated over nickel



Tolerances: ±0.20mm			Date	Name	DBP 2008	
			03/11	dr		
					30 23 19	
					knitter-switch	
Modifications	Date	Name				Page
						1/2

Packaging:

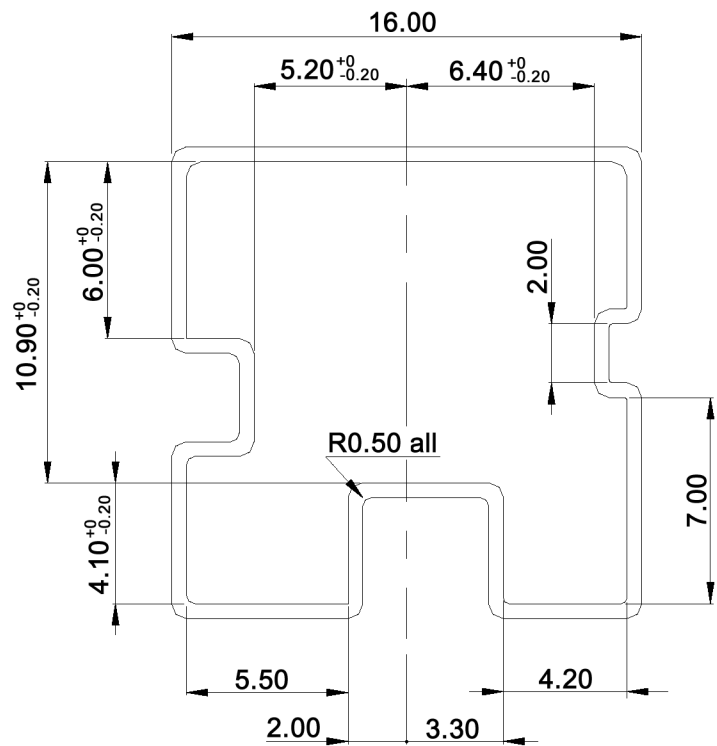

Tolerances: ± 0.20mm			Date	Name	DBP 2008		
			03/11	dr			
			knitter-switch		30 23 19		Page
							2/2
Modifications	Date	Name					