



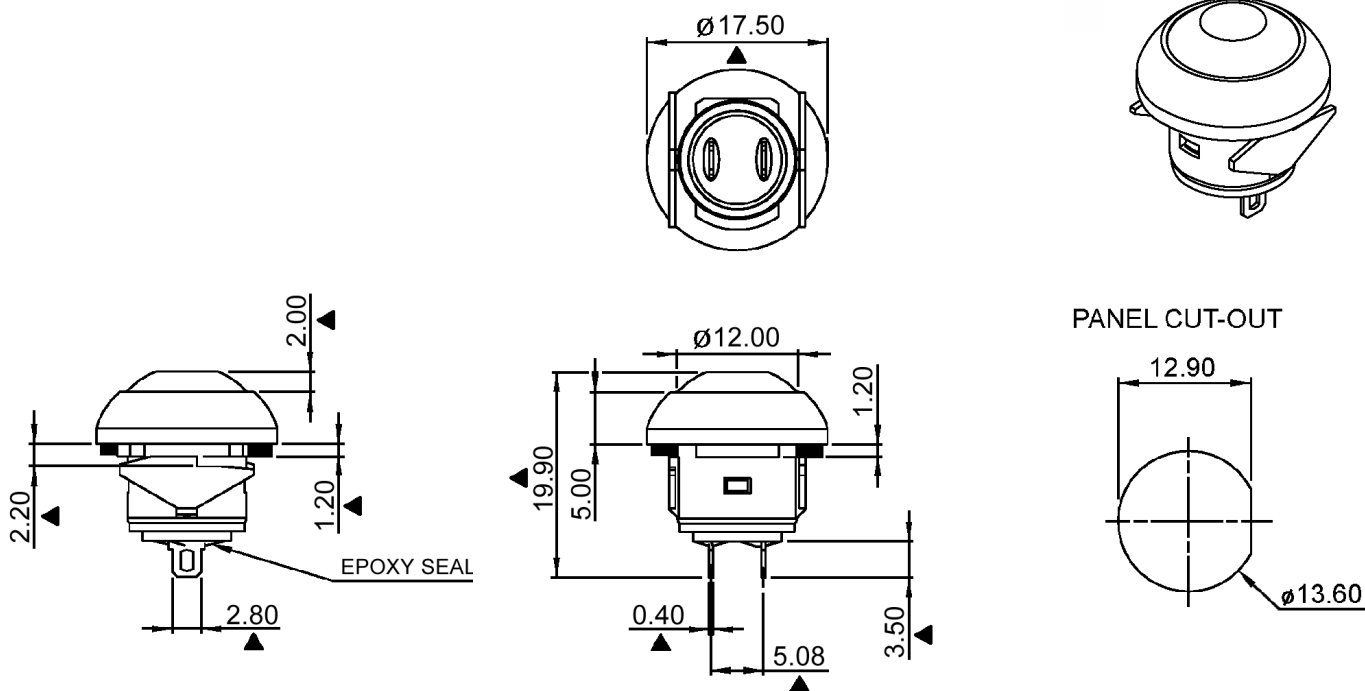

SWITCH FUNCTION

Model No.	POS. 1	POS. 2
DPW 1 CG	OFF	MOM
Term. Comm.	OPEN	SHORT

RUBBER WASHER

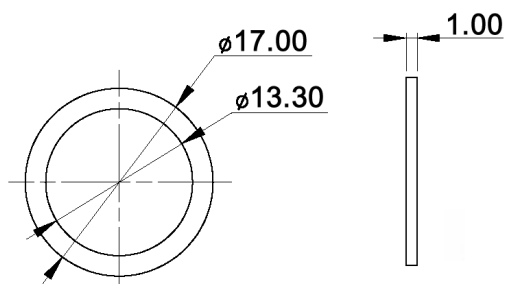

Specifications:

Contact rating:	max.: 400mA, 32V AC; 100mA, 50V DC; 125mA, 125V AC
Contact resistance:	50mOhm max.
Insulation resistance:	1GOhm min. at 500V DC
Dielectric strength:	1 000V AC
Operating temperature:	-30°C to +85°C
Mechanical life:	1 000 000 cycles
Electrical life:	500 000 cycles
Operating force:	3N +/-1N
Soldering conditions:	350°C max., 3sec.
Travel:	1.5mm
Panel thickness:	0.8mm min.; 1.8mm max.
Water proofing:	IP 67
Material:	Case: DAP UL94V-0 Bushing / cap: polyamide 6/6 Terminal / contact: gold over silver plated

X=CAP COLOR	
W	white
K	black
R	red
O	orange
Y	yellow
G	green
B	blue



Tolerances: 0.00: ±0.25mm 0.0: ±0.40mm			Date	Name	DPW 1 CG S-x	
			08/07	dr		
Rubber washer	06/10	dr			30 12 19	
Actuator color black	06/08	dr				
Operating temperature	04/08	dr				
Water proofing	03/08	dr				
Modifications	Date	Name				Page 1/1

knitter-switch

30 12 19

Page

1/1