
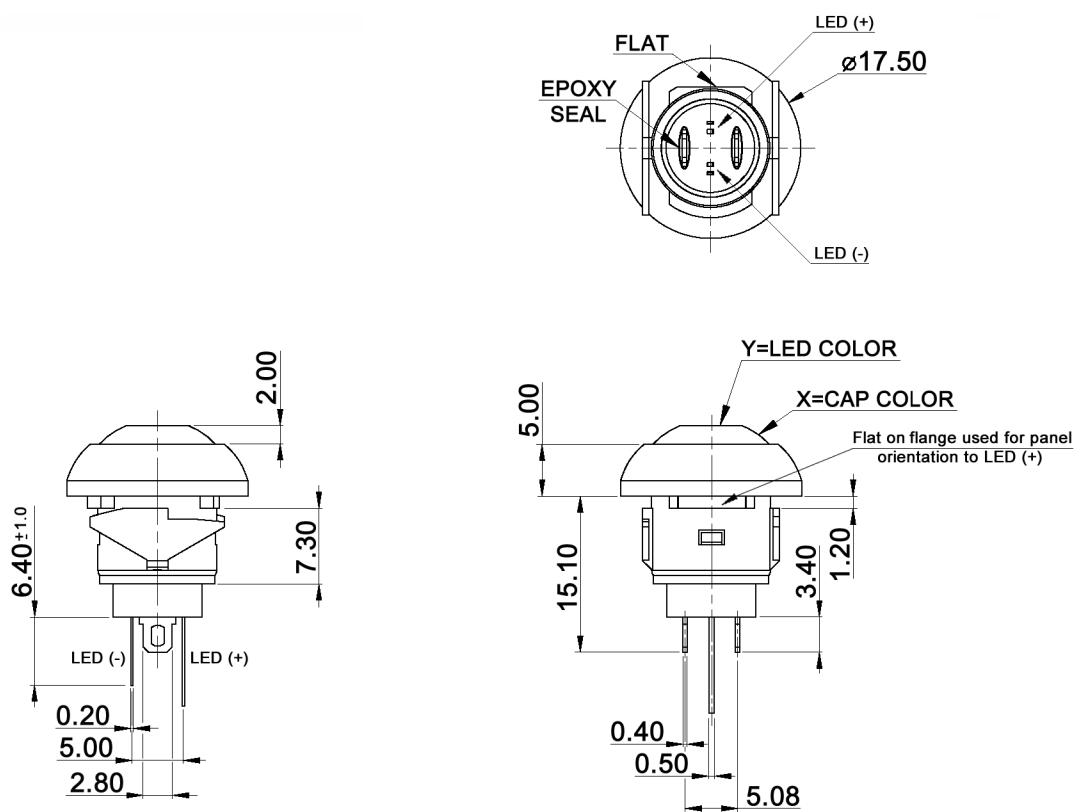


PANEL CUT-OUT



Tolerances: 0.00: ±0.25mm 0.0: ±0.40mm			Date	Name	DPV
			05/08	dr	
LED colour table	06/10	dr	knitter-switch		
Actuator color black	06/08	dr			
Modifications	Date	Name			

Specifications:

Contact rating:	max.: 400mA, 32V AC; 100mA, 50V DC; 125mA, 125V AC
Contact resistance:	50mOhm max.
Insulation resistance:	1GOhm min at 500V DC
Dielectric strength:	1 000V AC RMS
Operating temperature:	-30°C to +85°C
Mechanical life:	1 000 000 cycles
Electrical life:	500 000 cycles at full load
Operating force:	2N - 5N
Contact bounce:	10 ms
Soldering conditions:	300°C max., 3sec.
Total travel:	1.5mm
Panel thickness:	0.8mm min. - 1.8mm max.
Water proofing:	IP 67
Material:	Case: polyamide 4/6 UL94V-0 Cap / bushing: polyamide 6/6 Terminal / contacts: gold over silver plated

Lens appearance	Colour	Electr
		V Typ.
Water clear	white (at 5mA)	3.2
	super red	1.7
	super yellow	2.1
	super green	2.0
	super blue	3.2
	super yellow	2.1
	super green	2.0
	super yellow	2.1
	super blue	3.2
	super yellow	2.1
	super red	2.0
	super red	2.0
	super green	2.0
	super red	2.0
	super blue	3.2
	super green	2.0
	super blue	3.2

X=CAP COLOR	
W	white
K	black
R	red
O	orange
Y	yellow
G	green
B	blue

Y=LED COLOR	
W	white
R	red
Y	yellow
G	green
B	blue
YG	yellow / green
YB	yellow / blue
YR	yellow / red
RG	red / green
RB	red / blue
GB	green / blue

SWITCH FUNCTION

Model No.	POS. 1	POS. 2
		
DPWL 1 CG S	OFF	MOM
Term. Conn.	OPEN	SHORT

Tolerances: 0.00: ±0.25mm 0.0: ±0.40mm			Date	Name	DPV
			05/08	dr	
					knitter-switch
Modifications	Date	Name			