

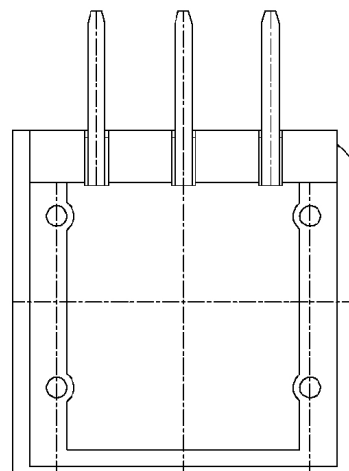
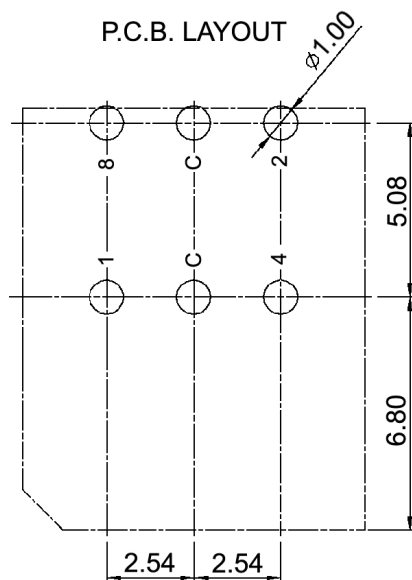


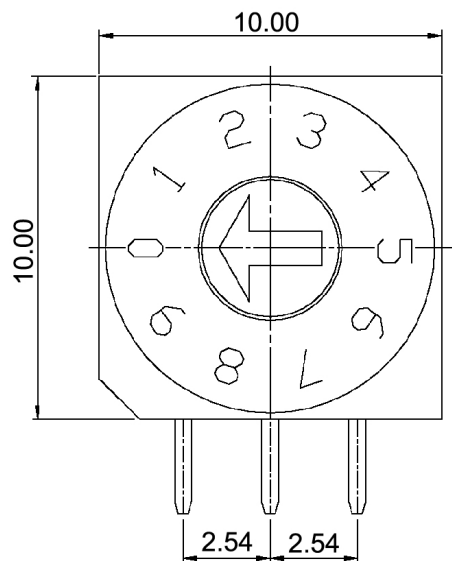

BCD

		Real coded				
		C	1	2	4	8
10 P o s i t i o n s	0	●				
	1	●	●			
	2	●		●		
	3	●	●	●		
	4	●			●	
	5	●	●		●	
	6	●		●	●	
	7	●	●	●	●	
	8	●				●
	9	●	●			●

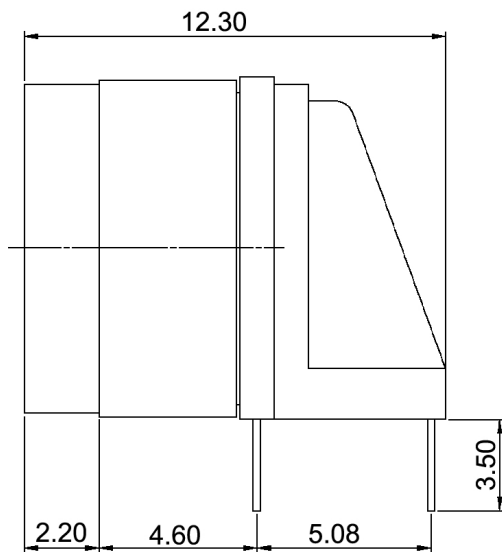

Specifications:

Contact rating:	switching: 15mA, 24V DC non-switching: 100mA, 50V DC
Contact resistance:	80mOhm max.
Insulation resistance:	100MOhm min.
Mechanical life:	10 000 cycles
Operating force:	700gf max.
Operating temperature:	-40°C to +85°C
Storage temperature:	-40°C to +85°C
Soldering conditions:	pre-heat: max. 120°C, max. 70sec. wave soldering: max. 260°C, max. 10sec.
Color of actuator:	grey
IP rating:	IP67

Tolerances: ≤ 10mm: ≥ 10mm:			Date	Name
			08/07	dr
Soldering conditions	01/11	dr		
IP rating	06/09	dr		
Operating temperature	09/08	dr		
Temperatures	01/08	dr		
Modifications	Date	Name		

DRR 60010

knitter-switch

30 11 90

Page

1/1