

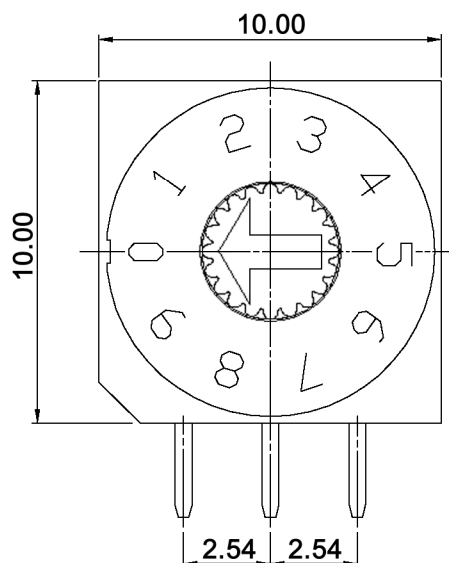


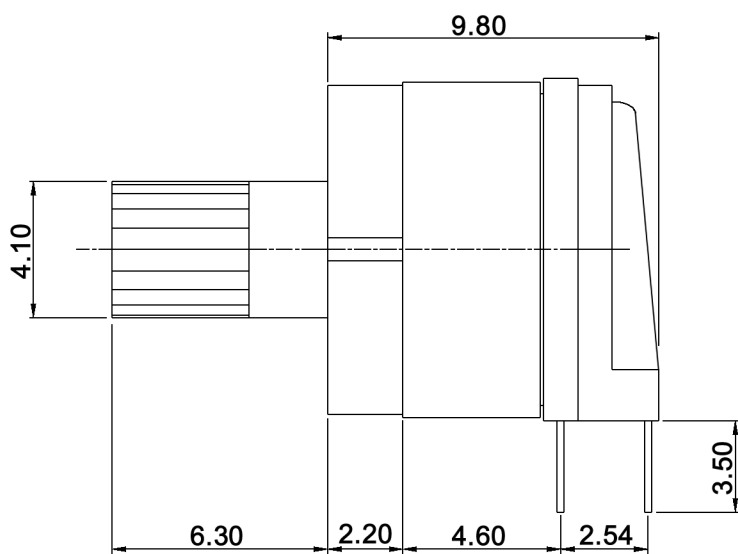

P.C.B. LAYOUT

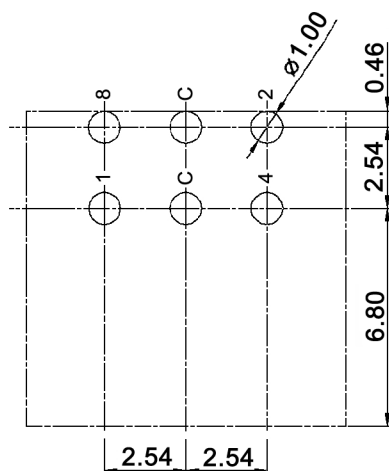

BCD

		Real coded				
		C	1	2	4	8
10 P o s i t i o n s	0	●				
	1	●	●			
	2	●		●		
	3	●	●	●		
	4	●			●	
	5	●	●		●	
	6	●		●	●	
	7	●	●	●	●	
	8	●				●
	9	●	●			●



Tolerances:			Date	Name	DRR 61010-1	
			04/08	dr		
					30 14 38	
Revised	03/12	dr				
Soldering conditions	01/11	dr				
IP rating	06/09	dr				
Operating temperature	11/08	dr			Page	
Modifications	Date	Name				
			knitter-switch		1/2	

Specifications:

Contact rating: non-switching: 400mA, 24V
switching: 150mA, 24V
Contact resistance: 80mOhm max.
Insulation resistance: 100Mohm min. at 250V DC for 1 minute +/-5sec.
Dielectric strength: 250V AC (50/60Hz) for 1 minute
Operating temperature: -40°C to +85°C
Storage temperature: -40°C to +85°C
Electrical life: 10 000 steps
Operating force: 700gf/cm max.
Soldering conditions: pre-heat: max. 120°C, max. 70sec.
wave-soldering: max. 260°C, max. 10sec.
IP rating: IP67
Material: Cover / base: PA66
Actuator: POM, grey
Contact / terminal: phosphor bronze, min. 0.07µm gold plated
over min. 0.1µm nickel
PCB: epoxy seal, min. 0.05µm gold plated
O-ring: silicone



Tolerances:			Date	Name	DRR 61010-1
			04/08	dr	
			knitter-switch		30 14 38
					Page
					2/2
Modifications	Date	Name			