



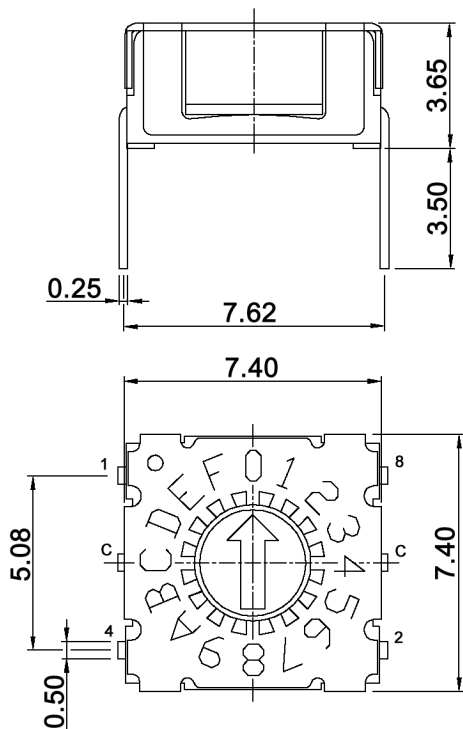

Hexadecimal		Real coded				
16 positions		C	1	2	4	8
	0	●				
	1	●	●			
	2	●		●		
	3	●	●	●		
	4	●			●	
	5	●	●		●	
	6	●		●	●	
	7	●	●	●	●	
	8	●				●
	9	●	●			●
	A	●		●		
	B	●	●			●
	C	●			●	●
	D	●	●		●	●
	E	●		●	●	●
	F	●	●	●	●	●


P.C.B. DIMENSION

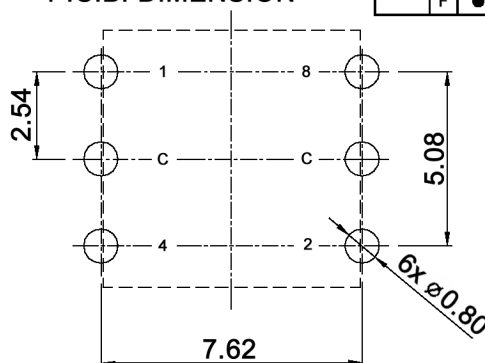

Specifications:

Contact rating:	non-switching: 400mA, 42V switching: 100mA, 42V
Contact resistance:	80mOhm max.
Insulation resistance:	100MOhm min. at 250V DC for 1 minute +/-5sec.
Dielectric strength:	250V DC (50Hz/60Hz) for 1 minute
Operating temperature:	-50°C to +125°C
Storage temperature:	-55°C to +135°C
Mechanical life:	25 000 cycles
Operating force:	120 +/-30gf/cm
Soldering conditions:	auto-soldering: max.: 260 +/-5°C, 5 +/-1sec. IR reflow soldering: see profile
Packaging unit:	70 pcs / tube
Material:	Cover / spring plate / guide plate: stainless steel Contact / terminal: phosphor bronze, min. 0.07µm gold plated over min. 0.3µm nickel Rotor / base: PA66 O-ring: silicone Actuator color: gray
Protection:	IP67

Soldering conditions:

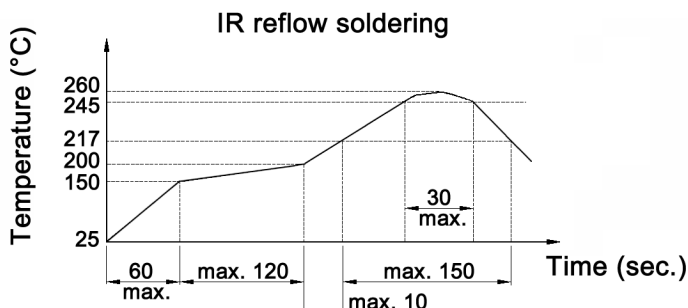

Tolerances:			Date	Name	DRS 15016
			10/08	dr	
			knitter-switch		30 16 26
Packaging unit	09/12	dr			
Modifications	Date	Name			Page 1/1