
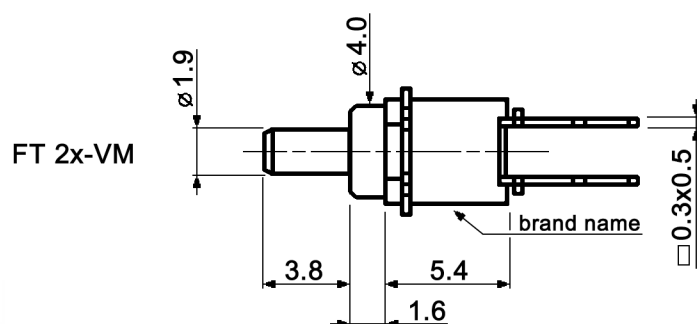
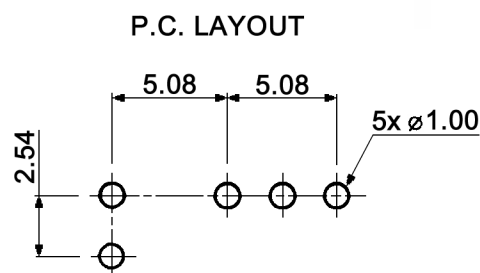
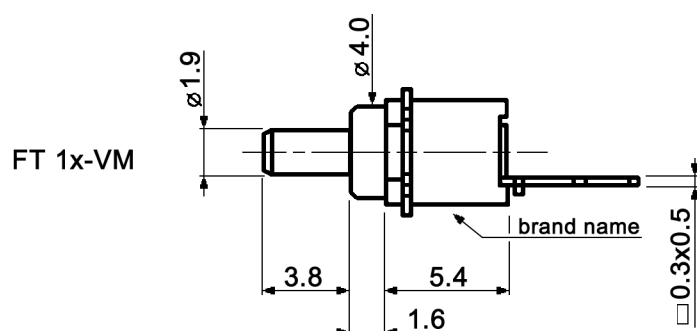
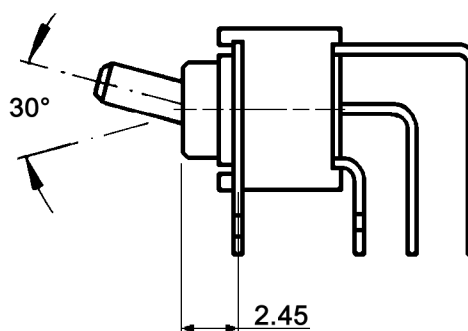


"x"	Switch function
D	on - on
E	on - off - on
F	mom - on
G	mom - off - mom
H	mom - off - on

The closed contacts are opposite to the lever position.
For code F and H: "mom" is on the left hand side when looking at the brand name side.

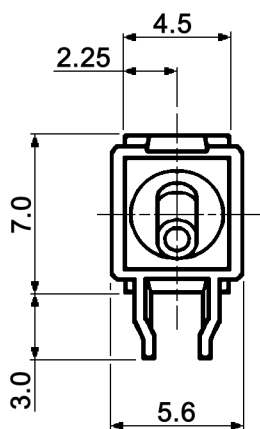

Tolerances:			Date	Name	FT 1x-VM / FT 2x-VM
			10/08	dr	
			knitter-switch		20 25 65
Modifications	Date	Name	Page 1/2		

Specifications:

Contact rating: max.: 0.4VA, 28V DC
min.: 1μA, 20mV DC
Contact resistance: 100mOhm max.
Insulation resistance: 500MOhm min. at 250V DC
Operating temperature: -20°C to +80°C
Mechanical life: min. 30 000 cycles
Soldering conditions: auto-soldering: max.: 250 +/-5°C, 7sec.
max.: 270 +/-5°C, 5sec.
Mounting: on pc-board
ESD resistance: 8kV min. (between lever and terminals)
Material: Contacts: phosphor bronze, gold plated
Terminals: PC terminals, crimped, phosphor bronze, gold plated
Case / lever: PES, UL94V-0, washable



Tolerances:			Date	Name	FT 1x-VM / FT 2x-VM
			10/08	dr	
			knitter-switch		20 25 65
Modifications	Date	Name	Page 2/2		