

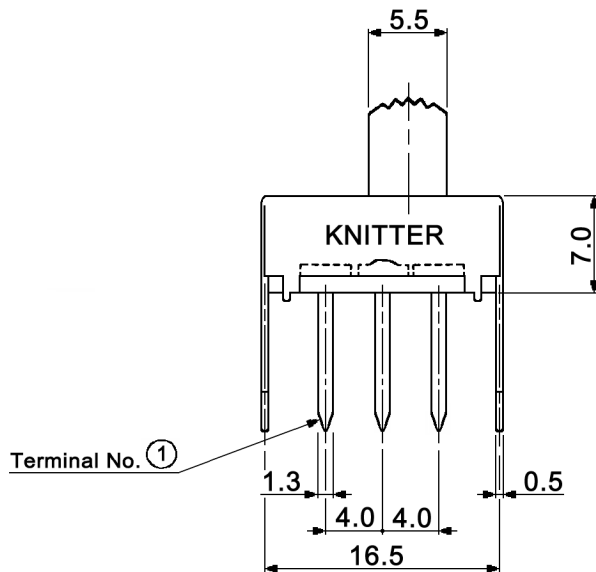
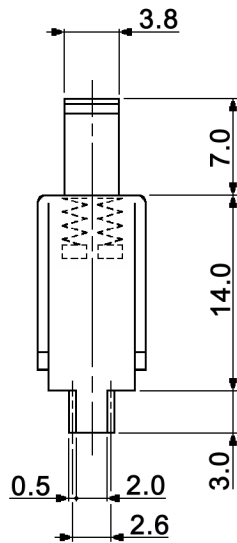


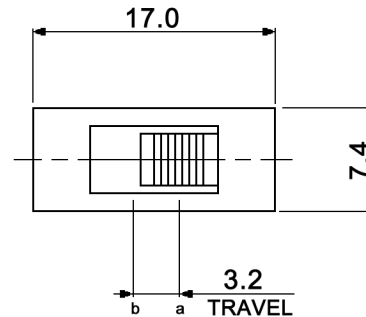


HOLE LAYOUT $\oplus 0.05$

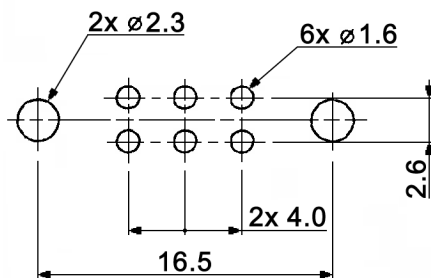

CIRCUIT DIAGRAM

C: COMMON PIN
BOTTOM VIEW



Specifications:

Contact rating: 0.3A, 30V DC
Contact resistance: 30mOhm max.
Insulation resistance: 100MOhm min. at 500V DC for 1 minute
Dielectric strength: 500V AC (50/60Hz, 2mA) for 1 minute
Operating temperature: -20°C to +85°C
Mechanical life: 10 000 cycles
Operating force: 250 +/-100gf
Soldering conditions: no pre-heat

Material:

wave soldering: 260 +/-5°C, 5 +/-1sec.
Terminal: brass strip, silver plated
Base: phenolic resin, natural
Contact plate: brass strip, silver plated
Spring: SWC, temper
Frame: steel, nickel plated
Slider: POM, black



Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm			Date	Name	MFP 201 N		
			02/11	dr			
			knitter-switch		30 23 01		Page
							1/1
Modifications	Date	Name					

knitter-switch

Page

1/1