


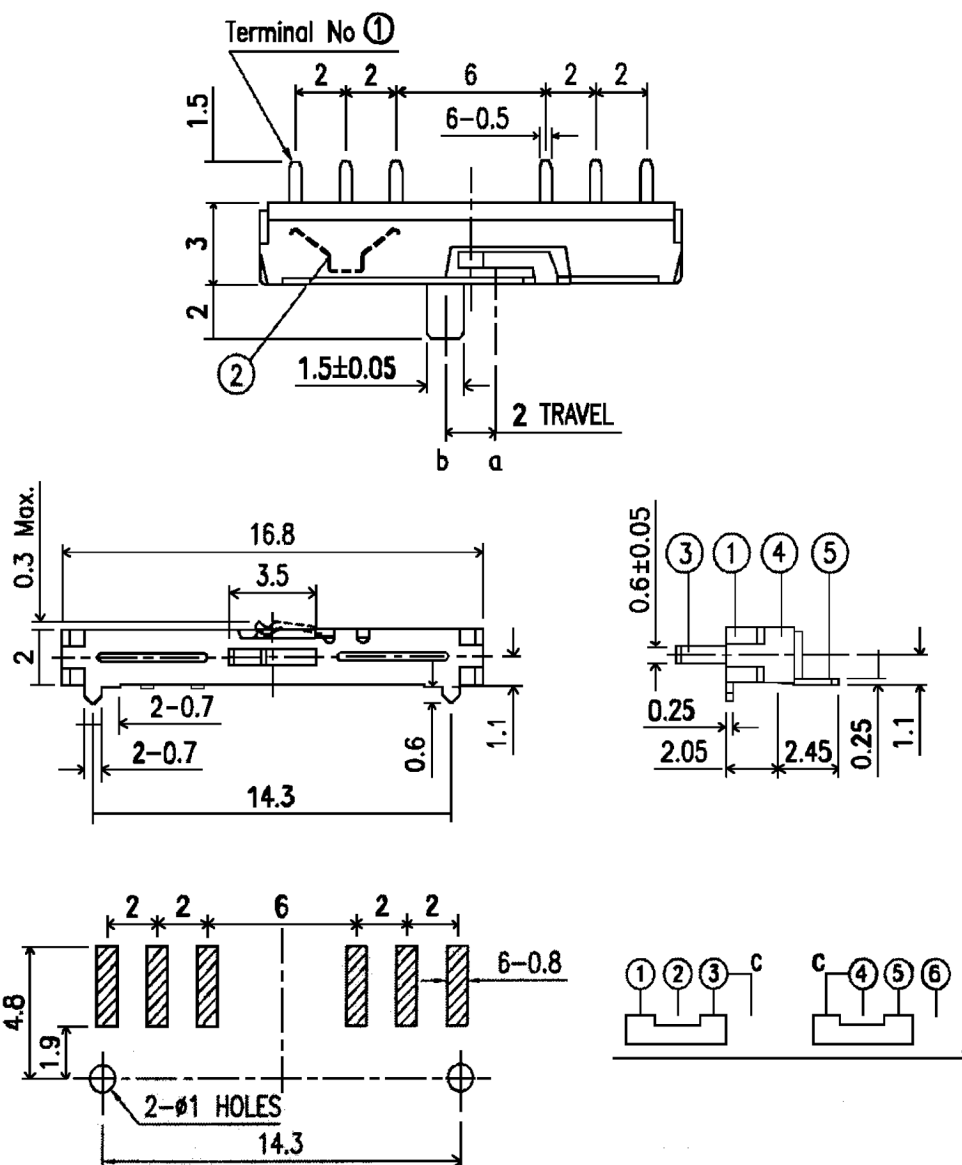

Specifications:

Contact rating:	15V DC; 300mA
Contact resistance:	50mOhm max.
Insulation resistance:	100MOhm min. at 500V DC
Dielectric strength:	100V AC, 50Hz for the duration of 1 minute
Operating temperature:	-20°C to +70°C
Electrical life:	5 000 cycles
Operating force:	130gf +/- 80gf
Terminals:	PBS, silver plated
Soldering conditions:	75s > 225°C; max. 250°C
Materials:	Case: LCP
	Contact: BeCu, silver plated
	Slider: LCP
	Cover: SUS
	Slide grease No. PA-1D
Contact timing:	non-shorting

Maßstab	Datum	Name	MMS 224 T	
Oberfläche	Bearb.	us		
Änderung Material	05/04	us		
Case + slider				
Spec	11/04	dr	30 05 25	
Slide grease	01/05	dr		
Zust.	Änderung	Datum	Name	Blatt 1/1