


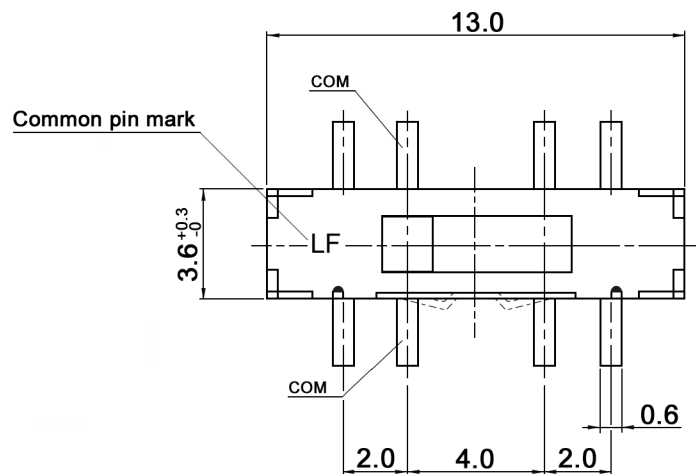


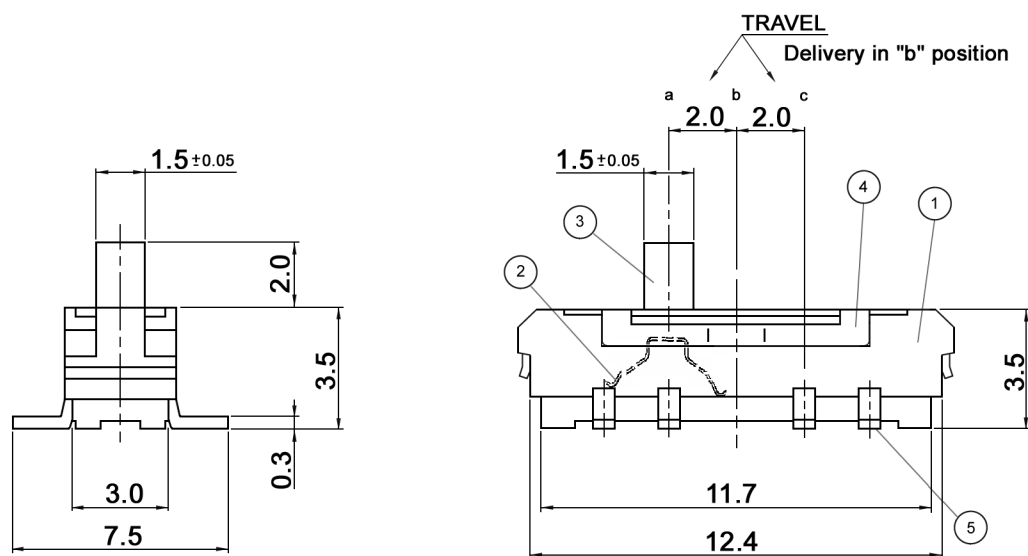

P.C. LAYOUT

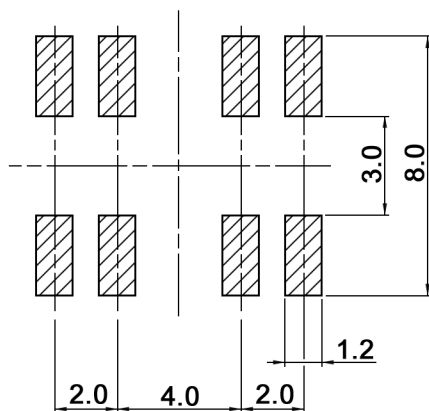

SCHEMATIC




Compliance: RohS II (2011/65/EU)

Tolerances: up to 10: $\pm 0.2\text{mm}$ above 10-50: $\pm 0.3\text{mm}$			Date	Name	MMS 238 T	
Dimension	07/16	dr	09/07	dr		
Common pin orientation	10/14	dr				
Material contact plate	07/14	dr				
Soldering conditions	07/11	dr				
Material	06/09	dr	knitter-switch			30 12 36
Slider position	06/08	dr				
Operating temperature	12/07	dr				Page
Modifications	Date	Name				1/3

Specifications:

Contact rating: 0.3A, 6V DC
Contact resistance: 70mOhm max.
Insulation resistance: 100MOhm min. at 500V DC for 1 minute
Dielectric strength: 500V AC (50/60Hz, 2mA) for 1 minute
Operating temperature: -10°C to +85°C
Mechanical life: 5 000 cycles min.
Operating force: a-b c-b: 200 +/-100gf
b-a b-c: 300 +/-150gf
Material: 1- Case: PA46, black
2 - Contact plate: stainless steel, silver plated
3 - Slider: PA46, blue
4 - Cover: SUS, washing
5 - Terminal: brass strip, silver plated


Soldering conditions:

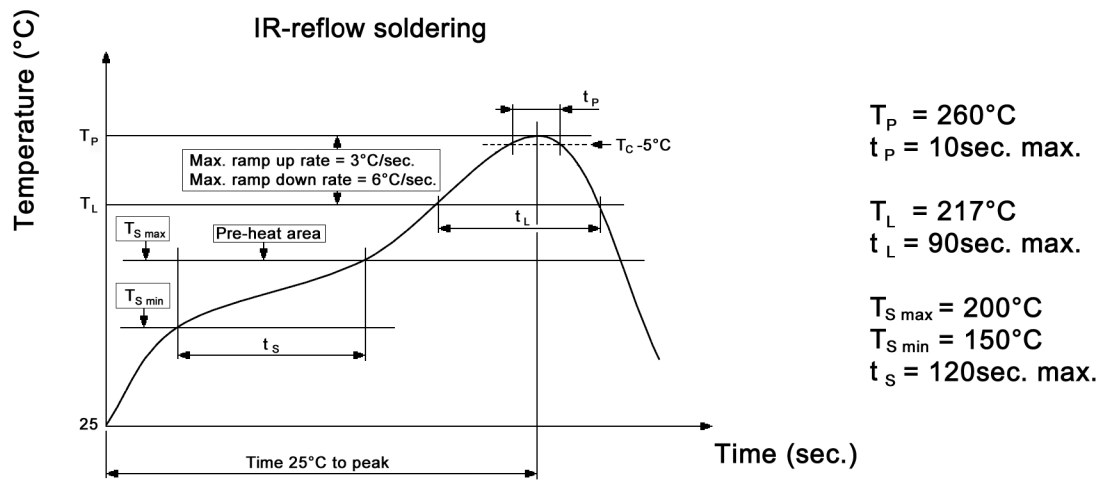

Compliance: RohS II (2011/65/EU)

Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm			Date	Name	MMS 238 T	
			09/07	dr		
					30 12 36	
					knitter-switch	
Modifications	Date	Name				Page
						2/3

Packaging:

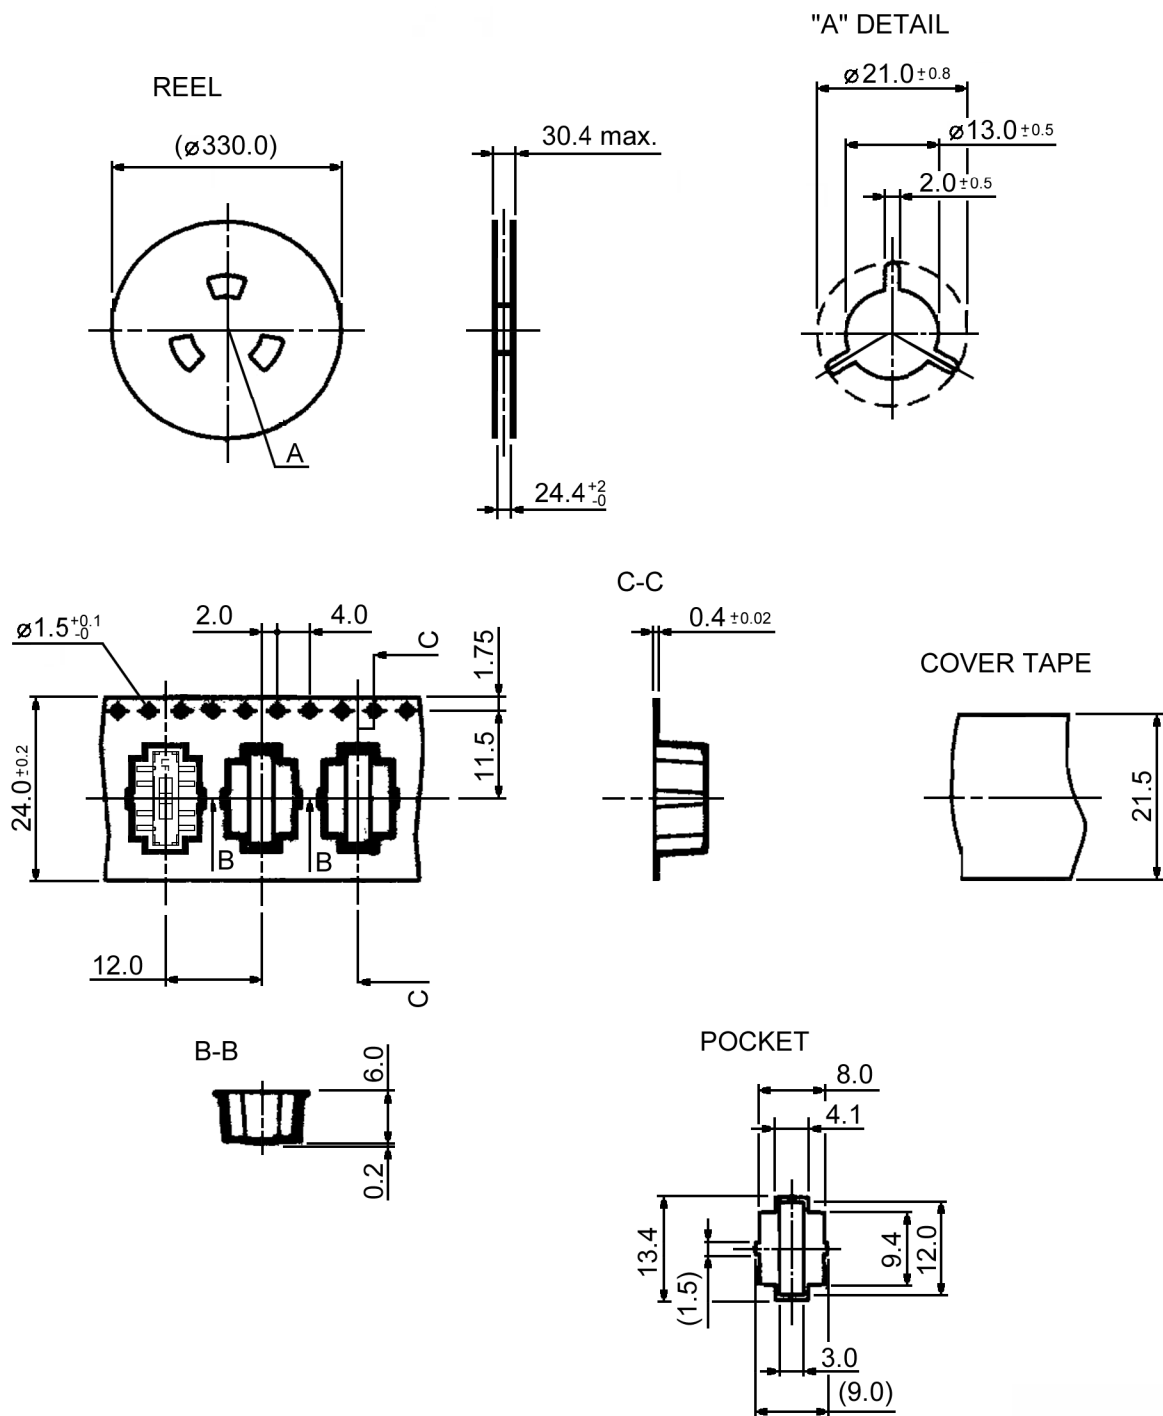

Packaging unit: 900 pcs. / reel
Compliance: RohS II (2011/65/EU)

Tolerances: up to 10: $\pm 0.2\text{mm}$ above 10-50: $\pm 0.3\text{mm}$			Date	Name	MMS 238 T	
			09/07	dr		
					30 12 36	
			knitter-switch			Page
						3/3
Modifications	Date	Name				