


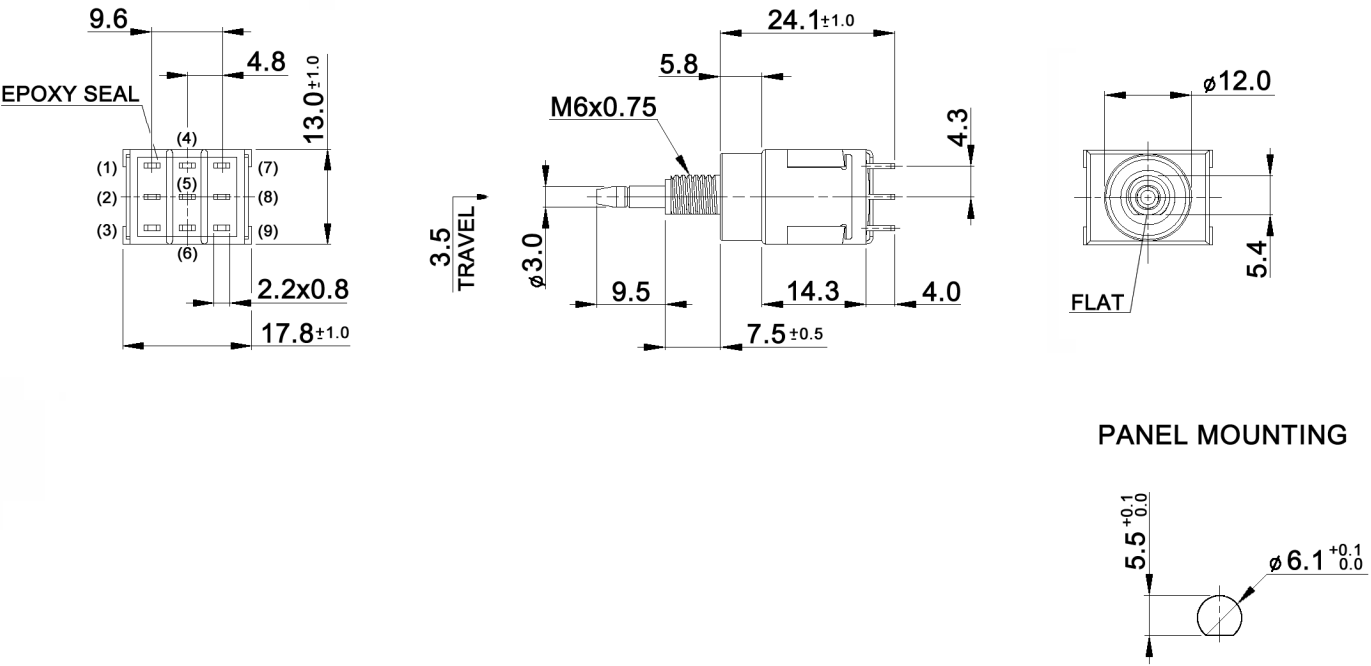

CONTACT ARRANGEMENT

code for x	function	connected terminals
D	ON - ON	1-2, 4-5, 7-8 alternating with 2-3, 5-6, 8-9
F	ON - MOM	rest position: 1-2, 4-5, 7-8; pushed down: 2-3, 5-6, 8-9

Specifications:

- Contact rating:
- 3A, 250V AC / 6A, 125V AC
4A, 30V DC / 5A, 12V DC
6A, 6V DC
- Contact resistance:
- 20mOhm max.
- Insulation resistance:
- 1 000MOhm min. at 500V DC
- Dielectric strength:
- 1 500V, 50Hz for the duration of 1 minute
- Operating temperature:
- 45°C to +140°C
- Mechanical life:
- min. 30 000 cycles
- Soldering conditions:
- hand-soldering: max.: 420°C, 3sec., 60W
auto-soldering: max.: 270°C, 5sec.
- Mounting instruction:
- max. torque: 49Ncm
- IP rating:
- IP67
- Material:
- Terminal / contact: brass, silver plated
Case: DAP
Housing: stainless steel, CNS9265
Bushing: copper alloy, C3604BD nickel plated
Actuator: copper alloy, C3604BD chrome plated
- Included accessories:
- 1 pc. nut M6x0.75, nickel plated, 9mm wrench size
1 pc. tooth washer
1 pc. O-ring, silicone

Compliance: RohS II (2011/65/EU)

Tolerances: 0.00: ±0.25mm 0.0: ±0.40mm			Date	Name	MPE 306 x			
			07/09	dr				
			knitter-switch			30 18 81		Page
Contact arrangement	07/15	dr						
Dimension	01/11	dr					1/1	
Modifications	Date	Name						