




Specifications:

Contact rating:	650mA, 30V DC
Contact resistance:	20mOhm max.
Insulation resistance:	500MOhm min. at 500V DC
Dielectric strength:	500V, 50Hz for the duration of 1 minute
Operating temperature:	-20°C to +60°C
Mechanical life:	min. 20 000 cycles
Soldering conditions:	hand-soldering: max.: 260 +/-5°C, 3sec.
Mounting:	single-hole
Button color:	red
Contact arrangement:	off - mom
Material:	phenolformaldehyde, black
	Contacts: brass, silver plated
	Terminals: solder tags

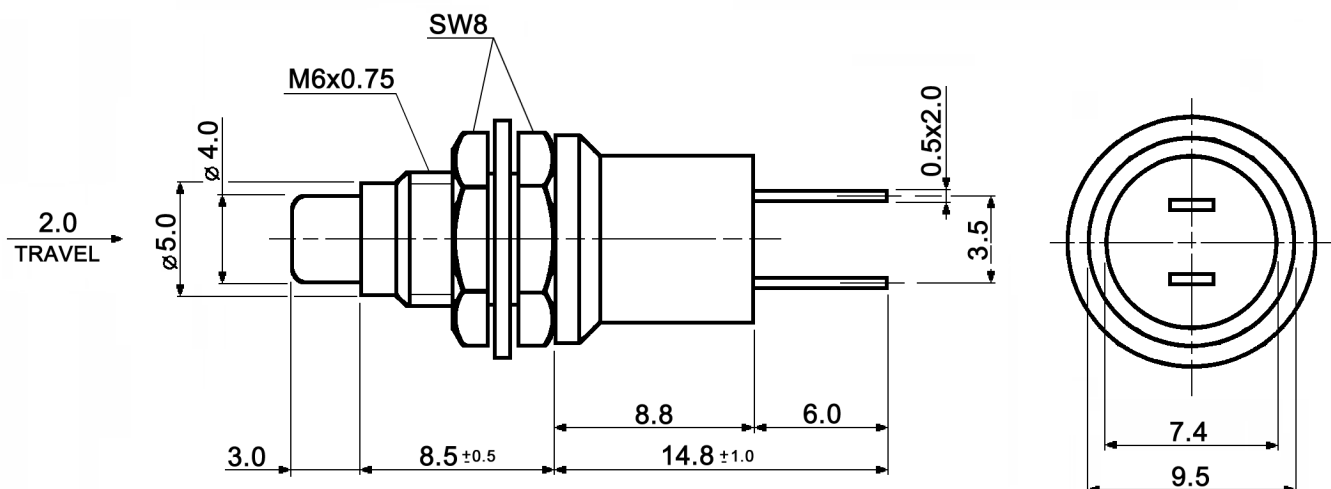

Tolerances:			Date	Name	MSP 101 C	
			11/08	dr		
					20 09 06	
					knitter-switch	
					Page	
Modifications	Date	Name			1/1	