




| xx | Knob colour |              |
|----|-------------|--------------|
| RT | red         | on request   |
| SW | black       | discontinued |

#### Specifications:

|                        |                                         |
|------------------------|-----------------------------------------|
| Contact rating:        | 650mA, 30V DC                           |
| Contact resistance:    | 20mOhm max.                             |
| Insulation resistance: | 500MOhm min. at 500V DC                 |
| Dielectric strength:   | 500V, 50Hz for the duration of 1 minute |
| Operating temperature: | -20°C to +60°C                          |
| Mechanical life:       | min. 20 000 cycles                      |
| Soldering conditions:  | hand-soldering: max.: 260 +/-5°C, 3sec. |
| Mounting:              | single-hole                             |
| Contact arrangement:   | normally closed                         |
| Material:              | phenolformaldehyde, black               |
|                        | Contacts: brass, silver plated          |
|                        | Terminals: solder tags                  |

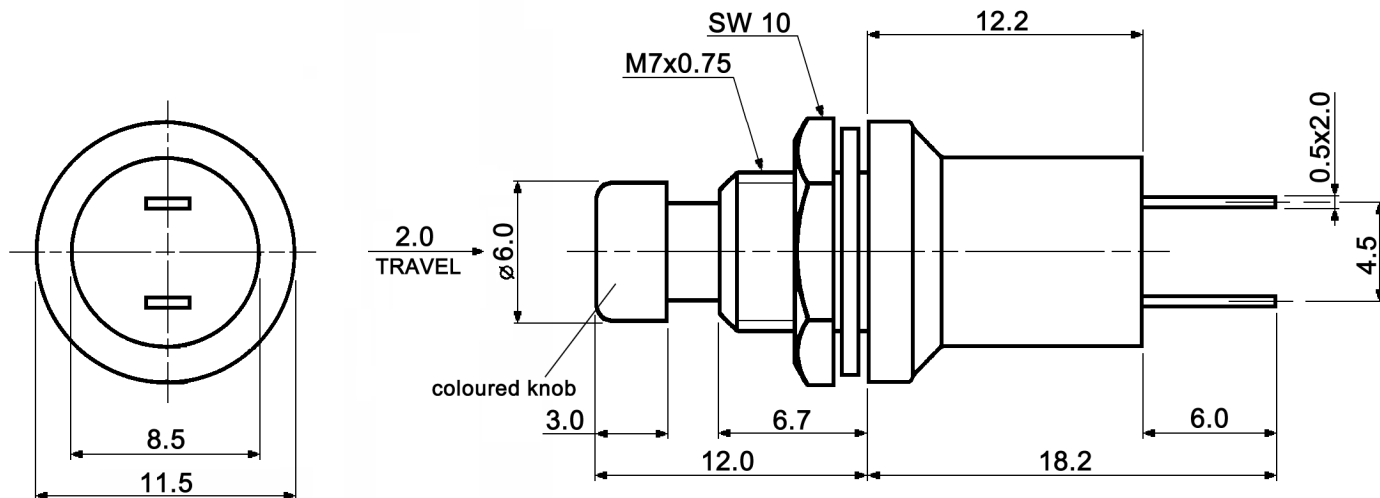

|                     |       |      |       |      |                       |      |
|---------------------|-------|------|-------|------|-----------------------|------|
| Tolerances:         |       |      | Date  | Name | <b>MSP 121 B xx</b>   |      |
|                     |       |      | 12/08 | dr   |                       |      |
|                     |       |      |       |      | <b>20 09 64</b>       |      |
|                     |       |      |       |      |                       |      |
|                     |       |      |       |      | <b>knitter-switch</b> |      |
|                     |       |      |       |      |                       |      |
| Contact arrangement | 05/11 | dr   |       |      |                       | Page |
| Modifications       | Date  | Name |       |      |                       | 1/1  |