


CONTACT ARRANGEMENT

code for x	function	toggle towards keyway	toggle opposite to keyway
D	On-On	1-2, 4-5, 7-8	2-3, 5-6, 8-9
F	Mom-On		

code for x	function	toggle towards keyway	toggle in center	toggle opposite to keyway
E	On-Off-On			
G	Mom-Off-Mom	1-2, 4-5, 7-8	open	2-3, 5-6, 8-9
H	Mom-Off-On			
EA	On-On-On	1-2, 4-5, 7-8	2-3, 4-5, 8-9	2-3, 5-6, 8-9

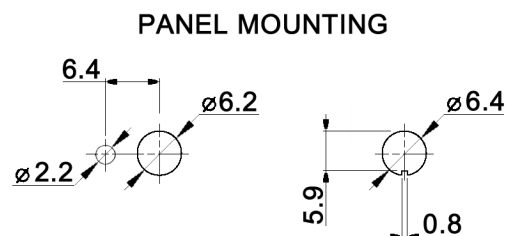

Specifications:

Contact rating:

3A, 250V AC / 6A, 125V AC
4A, 30V DC / 5A, 12V DC
6A, 6V DC

Contact resistance:

20mOhm max.

Insulation resistance:

1 000MOhm min. at 500V DC

Dielectric strength:

1 500V, 50Hz for the duration of 1 minute

Operating temperature:

-45°C to +140°C

Mechanical life:

min. 200 000 cycles

Soldering conditions:

hand-soldering: max.: 420°C, 3sec., 60W
auto-soldering: max.: 270°C, 5sec.

Mounting instruction:

max. torque: 49Ncm

Material:

Contact portion: solid silver
Other conducting parts: brass, 10µm silver plated over 1.5µm nickel
Case: DAP

Housing: stainless steel, CNS9265

Bushing: copper alloy, C3604BD nickel plated

Actuator: copper alloy, C3604BD chrome plated

Included accessories:

2 pcs. nut M6x0.75, nickel plated, 9mm wrench size
1 pc. tooth washer
1 pc. locking washer



Tolerances: 0.00: ±0.25mm 0.0: ±0.40mm			Date	Name	MTA 306 x	
			04/09	dr		
Material	07/11	dr	knitter-switch		30 17 89	
Dimension	01/11	dr				
Panel mounting	05/10	dr				
Modifications	Date	Name				Page
						1/1