

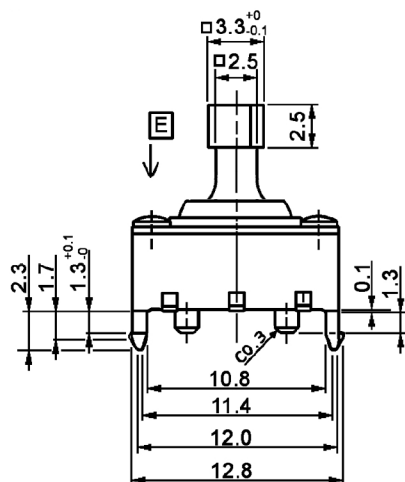
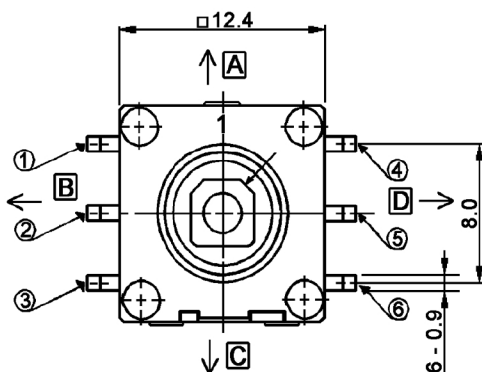
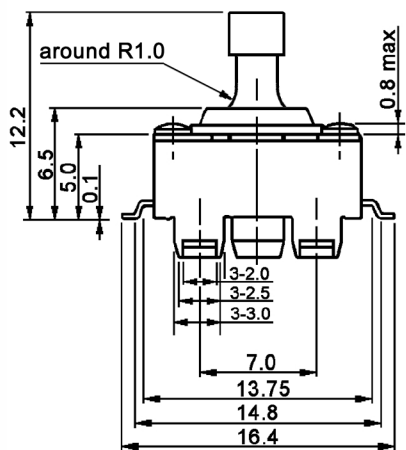




P.C.B. SOLDER LAND DIMENSION

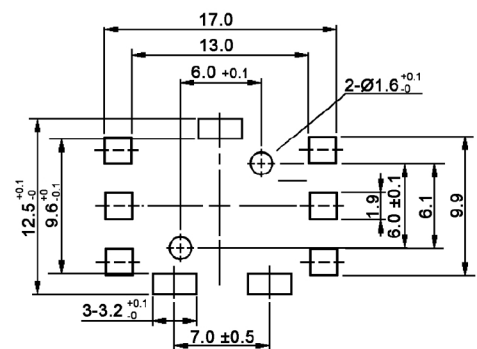

Specification:

Contact rating: 15V DC, 20mA
 Contact resistance: 100mOhm max
 Insulation resistance: 100MOhm min
 Dielectric strength: 100V AC for 1min
 Operating temperature: -40°C to +85°C
 Operating force: center push: 1.0 ± 0.1N
 4-directional: lever: 8° ± 2°

Operating travel:


Soldering conditions: manual soldering

- soldering temperature: 260°C
 - soldering time: 10s
 - reflow soldering: 150°C
 - preheat: 150°C
 - peak: 260°C


Tolerances: ±0.3mm			Date	Name
			06/04	us
P.C.B. Layout	03/14	dr		
Soldering conditions	06/13	dr		
Stem shape	06/10	dr		
Operating temperature	08/07	dr		
Packaging	11/05	dr		
Modifications	Date	Name		

knitter-switch


Packaging:

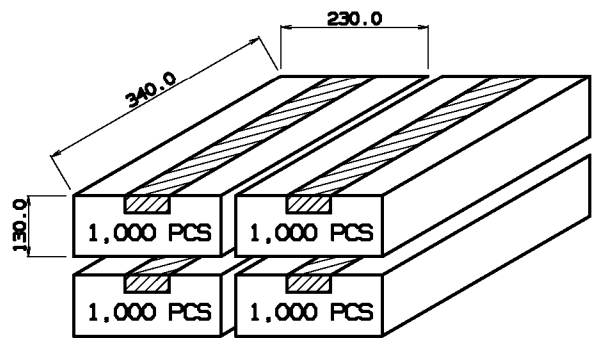


INNER BOX

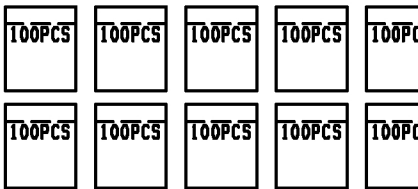

VINYLE WRAPPER

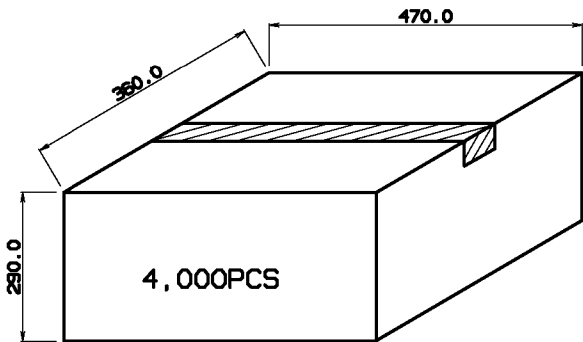

OUTER BOX

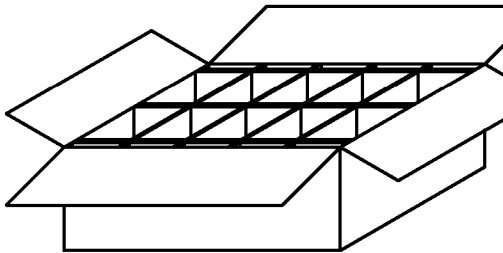

INSIDE OF INNER BOX

Tolerances: ±0.3mm			Date	Name	
			06/04	us	
Modifications	Date	Name	knitter-switch		