



2.0×1.6mm for Automotive



AEC-Q200 RoHS Compliant

Features

- Crystal unit for automotive electronics
- Ultra-miniature and low profile
(2.05×1.65×0.45mm)
- Ceramic package
- Reflow compatible

Applications

- ECU
- Automotive Camera
- Radar

How to Order

CX2016SA 20000 D0 G S S CC
① ② ③ ④ ⑤ ⑥ ⑦

①Series

③Load Capacitance

D0 8 pF

②Frequency

④Frequency Tolerance

G ±15×10⁻⁶

⑤Operating Temp. Range ⑥Frequency Temp. Stability

SS -40 to +125°C

±50×10⁻⁶

⑦Individual Specification

(STD Specification is "CC".)

Packaging (Tape & Reel 3000/ 15000 pcs./ reel)

Specifications

Item	Symbol	Specification	Unit	Remarks
Frequency Range	f _{nom}	16000 to 60000	kHz	
Overtone Order	OT	Fundamental	—	
Load Capacitance	CL	8	pF	Please contact us for other CL requirements.
Frequency Tolerance	f _{tol}	±15	×10 ⁻⁶	25°C±3°C
Motional Series Resistance	R1	Table 1	ohm	
Drive Level	DL	Table 2	μW	
Operating Temp. Range	T _{use}	-40 to +125	°C	
Storage Temp. Range	T _{stg}	-40 to +125	°C	
Frequency Temp. Characteristics	f _{tem}	±50	×10 ⁻⁶	Freq. deviation from the value at 25°C

Please contact us for other specifications.

Table 1 Motional Series Resistance


Frequency Range	Motional Series Resistance
16000≤f _{nom} <18000kHz	200 Ω max.
18000≤f _{nom} <26000kHz	150 Ω max.
26000≤f _{nom} <40000kHz	60 Ω max.
40000≤f _{nom} ≤60000kHz	50 Ω max.

Table 2 Level of Drive

Frequency Range	Level of Drive
16000≤f _{nom} <60000kHz	10μW (200μW max.)


Dimensions

(Unit: mm)

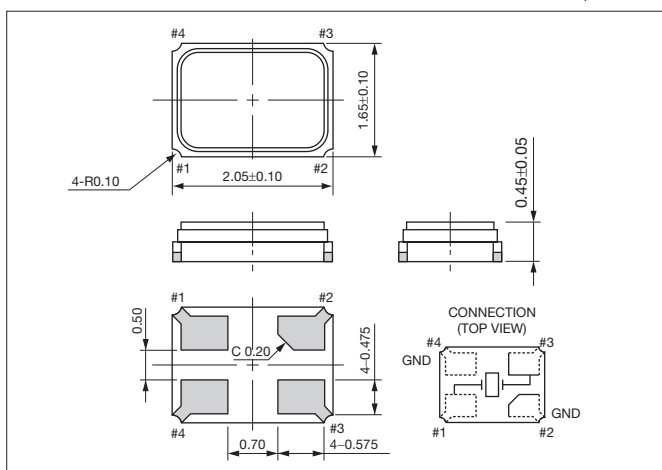

Recommended Land Pattern

(Unit: mm)

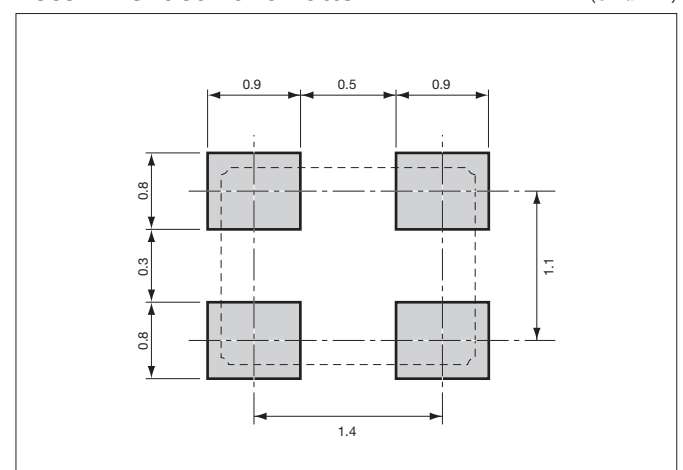

As of December 2019

